


GENERAL NO: 15:

exposed corners to be chamfered $\frac{3}{4}$ " unless otherwise noted.
 concrete in Superstructure to be Class "S."
 reinforcing steel to be deformed bars of Structural or Intermediate
 Shop list and bending diagrams must be submitted by the
 or before fabrication is begun.
 concrete to be poured in the dry.
 specifications: Ark. Standard Road and Bridge Specifications,
 May 20, 1925 and revised.
 details of Superstructure & Substructure see Div. No. 2767
 " Handrail " " " 1963.
 bridge. Continuation to complete Embankment around Bridge Ends.
 roadway drains and expansion devices to be paid for at the
 price bid for Reinforcing Steel.
 All piling to be 16" square and driven to penetration shown.

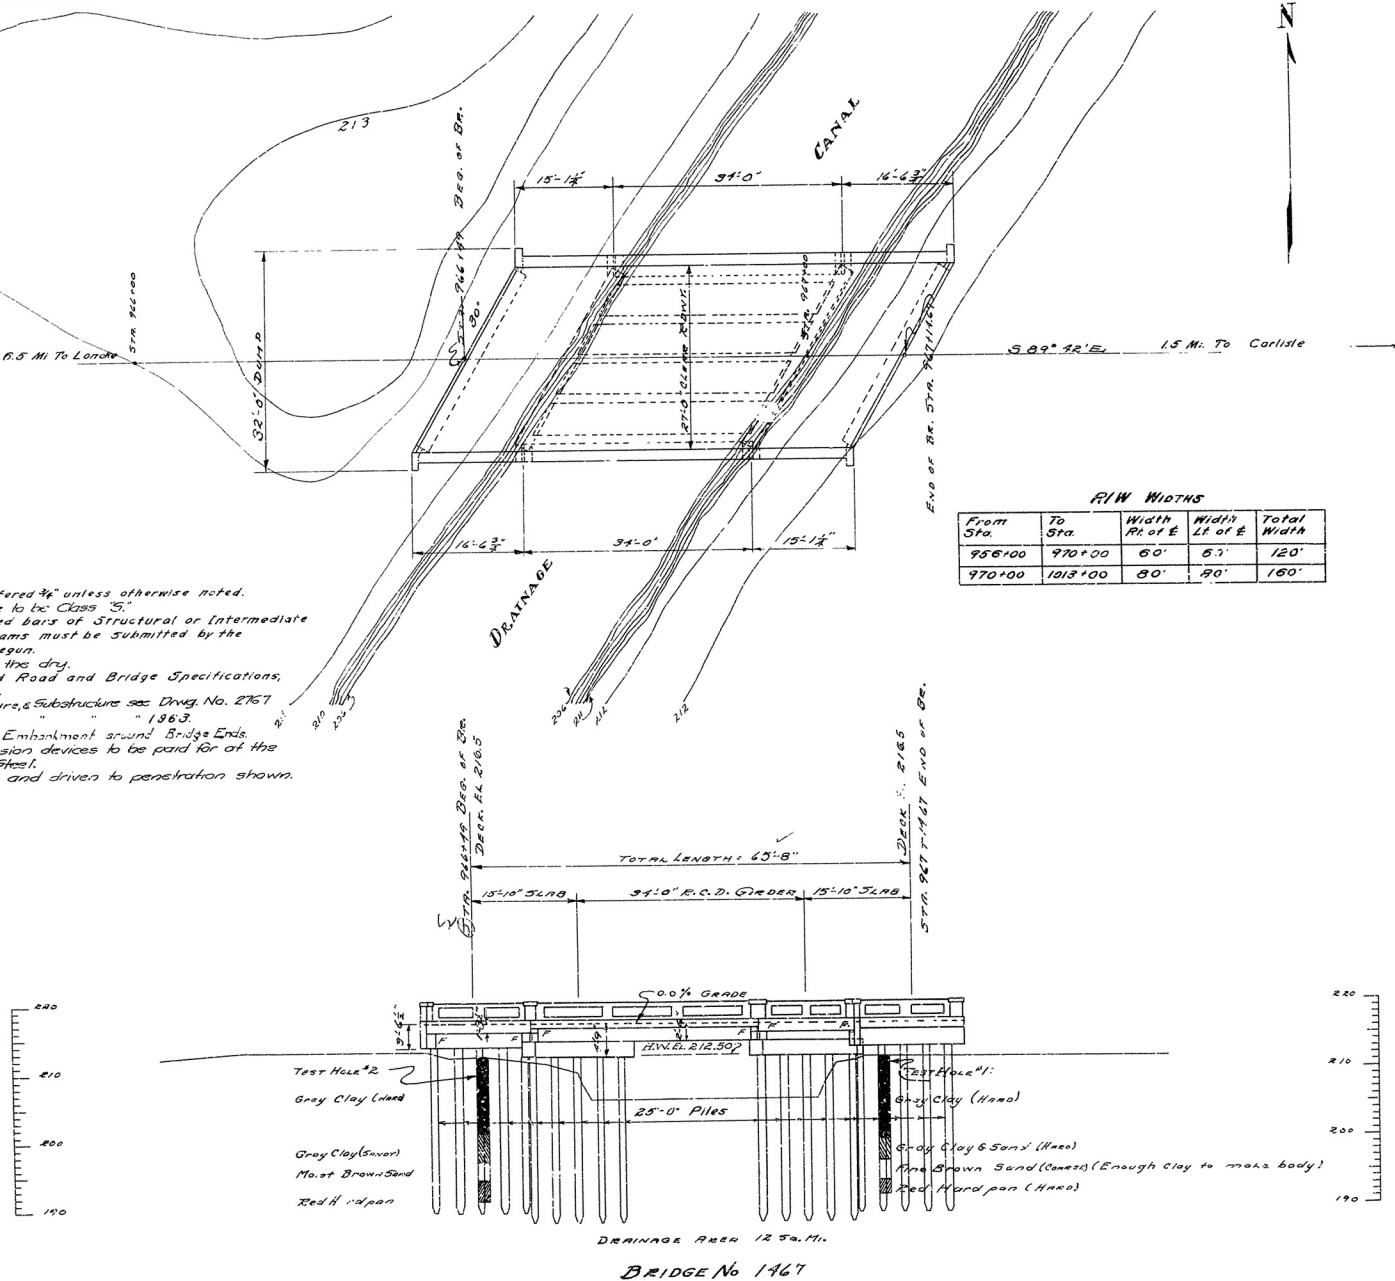

QUANTITIES:

S.R. & Item No. 12	Earth Excavation	110.0
Item No. 54	Class "S" Conc.	113.3
" 55	Reinforcing Steel	1,938.1
" 68	Precast Concrete Piling	507.1
" 74	Concrete Railing	...

LAYOUT
 FOR
 BRIDGE OVER DRAINAGE CANAL
 STA. 966+97 TO STA. 967+19.
 LONOKE CO.
 ROUTE 70 SEC. 15

ARKANSAS STATE HIGHWAY COMM.
 LITTLE ROCK, ARK.

Drawn By: *W. J. G.* Date: 2-2-30
 Traced By: *W. J. G.* Date: 2-2-30
 Checked By: *W. J. G.* Date: 2-2-30
 BRIDGE NO. 1467

Scale: 1" = 10'

DRAWING NO.

W. J. G.
 BRIDGE ENGINEER