

ARKANSAS DEPARTMENT OF TRANSPORTATION**SPECIAL PROVISION****JOB NO. 110716****AIRPORT CLEARANCE REQUIREMENTS**

Project 110716 is in the vicinity of Thompson-Robbins Airport. The project meets F.A.A. clearance requirements for all equipment that does not extend over nearby trees and overhead utilities, within the entire right-of-way of Job 110716.

The Contractor is encouraged to contact the Airport Manager at (870) 714-1844 before any construction takes place on the project to resolve any possible conflicts with aircraft operations and coordinate with a possible issuance of "Notice to Airmen" statements.

The Contractor for this project shall not use any equipment that extends above the roadway more than the height of nearby trees and overhead utilities within the 110716 limits without the permission of the F.A.A.

Should the Contractor decide to use equipment that exceeds height restrictions, they shall file a Notice of Proposed Construction with the F.A.A. a minimum of 45 days prior to the use of the equipment.

The Contractor shall follow the instructions of the Airport Managers to identify any equipment that will exceed the height restrictions within the limits listed with appropriate warning devices to insure aircraft safety.

Please contact Jeff Adams at (870) 238-8144 with questions regarding the information addressed in this Special Provision.

No direct payment will be made for fulfilling the requirements of this Special Provision, but payment will be considered included in the other contract items.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

ASSESSMENT OF WORKING DAYS – MAINTENANCE OF TRAFFIC

DESCRIPTION: To accommodate the off peak lane closure time limits shown in the contract “Maintenance of Traffic” Special Provision, the assessment of Calendar Days or Working Days will be based upon the same conditions as a normal Working Day.

For Calendar Day or Working Day projects, the Contractor shall be permitted to begin work on Sunday evening when the allowable lane closure period begins. Sunday evening shall be the allowable off peak lane closure time defined in the contract “Maintenance of Traffic” Special Provision but not prior to 6:00 p.m. On Working Day projects, time will not be assessed for Sunday. No other work will be allowed on Sunday unless an emergency is declared by the Department.

If the Contractor elects to work Friday and complete work on Saturday in accordance with the contract “Maintenance of Traffic” Special Provision, time will be assessed as appropriate for Saturday.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

BIDDING REQUIREMENTS AND CONDITIONS

Section 102 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The fourth sentence of the second paragraph of **Subsection 102.01** is hereby deleted, and the following substituted therefore:

Prospective bidders may file a questionnaire at any time; however, prospective bidders will not be given authorization to submit a proposal unless a rating has been extended based on an acceptable questionnaire.

The following paragraph has been added to **Subsection 102.01**.

A contractor with common officers/owners/partners of any firm, partnerships, joint ventures, or corporations that is seeking prequalification, has been prequalified, or has entered into a previous or current contract with the Commission may have the prequalification denied, limited, or revoked for the reasons listed in Subsection 102.04(a)-(m).

The last paragraph of **Subsection 102.01** is hereby deleted.

The second sentence of **Subsection 102.02** is hereby deleted, and the following substituted therefore:

The Notice to Contractors will contain a description of the proposed work, and information regarding access to proposal documents, plans, specifications, and the amount and nature of the proposal guaranty.

Subsection 102.03 is hereby deleted, renamed **Contents of Proposal Documents**, and the following substituted therefore:

The proposal documents will state the location and description of the contemplated construction and will show the estimate of the various quantities and kinds of work to be performed or materials to be furnished, and will have a schedule of items. The proposal documents will state the time in which the work must be completed, the amount of the proposal guaranty, and the date and time of the letting of work. The documents will also include any special provisions or requirements that vary from or are not contained in the standard specifications.

All forms included in the proposal documents are considered a part thereof. The plans, specifications, and other documents designated in the proposal documents will be considered a part of the proposal whether included or not.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

BIDDING REQUIREMENTS AND CONDITIONS

The first through fourth paragraphs of **Subsection 102.04** are hereby deleted, and the following substituted therefore:

To become an eligible bidder, prospective bidders must be registered to bid in Arkansas with Bid Express. Prospective bidders must also contact the Program Management Division at (501) 569-2261 during regular business hours between the date the project is advertised and 4:30 p.m. on the day prior to the scheduled bid opening to request to become eligible to bid specific projects. Only prequalified contractors or their authorized representative may request to become an eligible bidder.

If the prospective bidder's prequalification rating is not "unlimited", the bidder shall file a certification with the Department citing all contracts in force and the unfinished value of such work. A prospective bidder will not be allowed to submit a proposal until a certification for the current bidding period is on file and the amount of work the contractor may be allowed to undertake is determined. The contractor's prequalification rating, less the unfinished value of all contracts in force, will determine the amount of additional work that the contractor may be allowed to undertake. A contractor will not be allowed to submit a proposal on an individual project for which the estimated cost is more than the amount that the contractor may be allowed to undertake, but the contractor will be allowed to submit a proposal on more than one project, providing that the estimated cost of each project is not more than the amount that the contractor may be allowed to undertake. In the event a contractor submits a low bid on more than one project and the aggregate amount is greater than the amount the contractor may be allowed to undertake, the Commission will exercise its discretion in the award of a particular project or projects.

A charge will be assessed for authorization to submit a proposal, paper copies of the proposal documents, and plans issued. These services are provided during regular business hours until 4:30 p.m. on the day prior to the scheduled bid opening at the Arkansas Department of Transportation, 10324 Interstate 30, Little Rock, Arkansas 72209, (501) 569-2261. Payment shall be made at the time services are provided or upon receipt of statement therefore. No refund will be allowed for bids not submitted or for plans or proposal documents returned.

The second sentence of the first paragraph of **Subsection 102.06** is hereby deleted, and the following substituted therefore:

The bidder is expected to examine carefully the site of the proposed work, the proposal documents, plans, specifications, supplemental specifications, and special provisions before submitting a proposal.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

BIDDING REQUIREMENTS AND CONDITIONS

The first paragraph of **Subsection 102.07** is hereby deleted, and the following substituted therefore:

The proposal shall only be submitted through the internet bidding service, Bid Express. The bidder shall specify a unit price in figures for each pay item for which a quantity is given. A unit price of "zero" (\$0.00) is a valid price and will be considered. A blank unit price is not considered valid. The unit bid price should not be carried beyond 1 cent (\$0.01). Any figures on the unit bid price beyond 1 cent will be dropped.

The second and third paragraphs of **Subsection 102.07** are hereby deleted.

The fifth paragraph of **Subsection 102.07** is hereby deleted, and the following substituted therefore:

The bidder's proposal must be submitted with a digital signature containing the name of the individual, one or more members of the partnership, one or more members or officers of each firm representing a joint venture, or one or more officers of a corporation, or by an agent of the Contractor legally qualified and acceptable to the Department.

The sixth paragraph of **Subsection 102.07** is hereby deleted, and the following substituted therefore:

If the proposal is submitted with a digital signature of any person who is not listed in the bidder's Prequalification Questionnaire (Questionnaire Form) as the individual, as a partner of a partnership, or as an officer of a corporation, authorization for such submittal should be on file with the Department prior to the download of bids. This authorization shall be made before the downloading of bids and be in the form of a Power of Attorney duly executed and signed by an official with power to constitute such authority.

The last sentence of the seventh paragraph of **Subsection 102.07** is hereby deleted, and the following substituted therefore:

Those items of Asphalt Binder that are subject to a minimum bid price will bear the note "(Minimum bid price is \$120.00 per ton)" within the Schedule of Items of the proposal documents.

The first sentence of the ninth paragraph of **Subsection 102.07** is hereby deleted, and the following substituted therefore:

The proposal documents for all federal aid projects will contain a bidders list.

The last sentence of the ninth paragraph of **Subsection 102.07** is hereby deleted, and the following substituted therefore:

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

BIDDING REQUIREMENTS AND CONDITIONS

The information provided will not be used for contract awarding purposes but must be provided before the Contractor will be given authorization to submit proposals for future lettings.

Subsection 102.08 Irregular Proposals is hereby deleted, and the following substituted therefore:

- (a) Proposals will be considered irregular and will be rejected for the following reasons:
 - (1) If the proposal does not contain a unit price for each pay item listed except in the case of authorized alternate pay items.
 - (2) If the proposal is not digitally signed by an authorized representative of the firm.
 - (3) If the proposal is not accompanied by the proper proposal guaranty.
 - (4) If a proposal is received from an individual, firm, partnership, or corporation with an interest, as principal, in another proposal for the same project.
 - (5) If the proposal is not accompanied by the Certification to Submit DBE Participation.
- (b) Proposals will be considered irregular and may be rejected for the following reasons:
 - (1) If the proposal is not accompanied by a bid schedule and bid schedule narrative as required in the proposal documents.
 - (2) Unbalanced proposals in which the prices for some items are out of proportion to the reasonable costs representative of those items.
 - (3) If there are irregularities of any kind that may tend to make the proposal incomplete, indefinite, or ambiguous as to its meaning.

The first sentence of **Subsection 102.09** is hereby deleted and the following substituted therefore:

No proposal will be considered by the Commission unless a guaranty in the form of a bank draft, certified check, or cashier's check drawn on a solvent bank or trust company, or a bidder's paper bond executed by an approved surety company has been received by the Program Management Division prior to the download of bids.

The following paragraph is hereby added after the first paragraph of **Subsection 102.09**:

Electronic bid bonds are allowed. The prospective bidder should verify their bid bond in their proposal prior to submission.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

BIDDING REQUIREMENTS AND CONDITIONS

Subsection 102.10 is hereby deleted and the following substituted therefore:

The proposal shall only be submitted through the internet bidding service, Bid Express.

Subsection 102.11 is hereby deleted, and the following substituted therefore:

A bidder may withdraw or modify a proposal after it has been submitted to Bid Express, up to the time set for the deadline for proposals to be received. A proposal may also be withdrawn if the Commission fails to make an award within 40 calendar days after the date of downloading.

Subsection 102.12 is hereby deleted, renamed **Downloading of Proposals**, and the following substituted therefore:

Proposals will be downloaded and then posted on the Department's website at the time and place indicated in the Notice to Contractors.

The last sentence of **Subsection 102.15** is hereby deleted, and the following substituted therefore:

In any case, the prospective bidders will be contacted prior to the download of bids.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

BROADBAND INTERNET SERVICE FOR FIELD OFFICE

Section 602 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The following is added after the first paragraph of **Subsection 602.02(b)**:

Broadband Internet Service shall be provided to the field office where available.

The Broadband Internet Service shall be provided with an Internet Protocol (IP) address which is reachable on the global Internet (public) and which is permanently assigned (static). The Contractor is not required to provide this service if an IP address which is both static and public is not available.

If this service is not available at the beginning of a project but becomes available during the life of the project, the Contractor shall provide the service immediately from the date of availability.

The data transfer rate shall be 3 megabits per second (Mbps) download and 500 kilobits per second (kbps) upload, or higher, with latency not to exceed 150 milliseconds. If the broadband Internet service meets all of the requirements of this specification except for the data transfer rate and/or latency, then the best performing available connection shall be provided.

Prior to the selection of the broadband Internet service provider, the Contractor shall submit to the Resident Engineer, in writing, the proposed method for providing broadband Internet service. The Resident Engineer shall review this submittal and respond in writing regarding the acceptability of the proposed method.

The Broadband Internet Service shall be provided with equipment providing one Ethernet port.

ARKANSAS DEPARTMENT OF TRANSPORTATION**SPECIAL PROVISION****JOB NO. 110716****BUY AMERICA - CONSTRUCTION MATERIALS**

Description: **Section 106, Control of Material**, of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The following is added as **Subsection 106.01(c) Construction Materials**

Buy America – Construction Materials. (1) General. The Bipartisan Infrastructure Law (BIL) was enacted on November 15, 2021 (BIL Build America, Buy America Act Publication L. No. 117-58). This provision expands the Buy America requirements beyond what was only required for steel and iron products. The steel and iron provisions have not changed with the new law. Buy America requirements are in effect only on Federal-Aid contracts and all construction materials shall be produced/manufactured in the United States. Items specifically excluded from this requirement are cement and cementitious materials; aggregates such as stone, sand, or gravel; aggregate binding agents or additives (including asphalt binders). All other materials permanently incorporated into the project will be subject to Buy America requirements.

(2) Definitions. A construction material includes an article, material, or supply that is or consists primarily of:

- non-ferrous metals;
- plastic and polymer-based products (including polyvinylchloride, composite building materials, and polymers used in fiber optic cable);
- glass (including optic glass);
- lumber; or
- drywall.

Items manufactured through a combination of either two or more materials listed above, or at least one of the materials listed above and a material not listed shall be considered as a manufactured product, rather than as a construction material.

Build America, Buy America provisions specified for manufactured products in Section 70912(6)(B) of the Infrastructure Investment and Job Act (IIJA) do not apply to federal-aid construction projects per FHWA's existing statutory requirement applicable to manufactured products. A "manufactured product" is considered to be an item that undergoes one or more manufacturing processes before the item can be used on a construction project.

All construction materials shall be produced in the United States. This means all manufacturing processes to produce the construction materials shall occur in the United States. All manufacturing processes for construction materials shall mean the final manufacturing process and the immediately preceding manufacturing stage for the construction material.

(3) Compliance. The Contractor shall ensure that all manufacturing processes for each covered product comply with this Buy America Provision. Non-conforming products shall be replaced at no expense to the Department. It is the contractor's responsibility to assure all submittals required for Buy America are submitted to the Engineer prior to the products and or materials being incorporated into the project.

Buy America requirements do not apply to temporary elements not permanently incorporated into a project. This includes falsework, temporary sheet piling, detour bridges, temporary elements left in place at the contractor's convenience, unless the contract plans and specifications require steel or iron components or imply that the item be left in place, or items that are simply moved from one place to another within the same project. Buy America only applies to construction

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

BUY AMERICA - CONSTRUCTION MATERIALS

materials that are consumed in, incorporated into, or affixed to an infrastructure project. As such, it does not apply to tools, equipment, and supplies, such as temporary scaffolding, removed at or before completion of the project.

(4). Certification. The contractor shall provide a certification from the supplier for each construction material, stating that it meets the provisions of this specification or the Build America/Buy America act, prior to incorporating any construction material into the project. The supplier certifying may be the original manufacturer, fabricator, or vendor provided the supplier has sufficient control and knowledge of the manufacturing process to accept responsibility and certify full and complete conformance with the certification.

(5). Examples of Pay Items Affected. The following are items from the Standard Specifications that must meet the requirements of this specification. This list is provided for bidders' information and is not to be considered as all-inclusive as other items covered by the standard specifications, supplemental specifications, and special provisions may also fall under these requirements:

Non-Ferrous Metals	
Item	Specification Section
Aluminum Pipe Culverts	606
Aluminum Chain Link Fence	619
Aluminum Gates	619
Mailboxes	637
Electrical Conductors	700, 708
Ground Rods	701, 712, 714, 715
Loop Wiring	704
Feeder Wire	704
Traffic Signal Cable	708
Sign Supports	724, 730
Sign Panels	723, 725, 726, 727, 728
Video Cable	733
Metal Bridge Railing	806
Bridge Name Plates	812

Plastic/Polymer Based Products	
Item	Specification Section
Polyethylene Pipe Culverts	606
PVC Pipe Culverts	606
RC Pipe Culvert Gaskets	606
Drop Inlet Steps	609, 610, 640
ABS or Polyethylene Pipe for Underdrains	611
PVC Pipe for Underdrain Laterals	611
Filter Fabrics	611, 625, 629, 816
Geotextile Fabrics	625
Tactile Panels for Wheelchair Ramps	641
Non-Metallic Conduit (PE & PVC)	710
Sand Barrels/Lids for Impact Attenuation Barriers	731

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

BUY AMERICA - CONSTRUCTION MATERIALS

Glass	
Item	Specification Section
Glass Beads (drop on application)	718, 719
Fiber Optic Cable	Job SP
Windows in Building Construction	Job SP

Lumber	
Item	Specification Section
Wood Guard Rail Posts	617, 639
Wood Block Outs for Guardrail	617,639
Wood Posts for Guard Cable	618
Fence Posts and Braces (Type A, B, C and D)	619
Mailbox Supports	637
Treated Wood Poles	716
Treated Lumber	817
Treated Bridge Timbers	817
Timber Piling	818
Framing Lumber, Plywood, Trim Lumber in Building Construction	Job SP

Drywall	
Item	Specification Section
Drywall in Building Construction	Job SP

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

CARGO PREFERENCE ACT REQUIREMENTS

The requirements of the Cargo Preference Act (CPA) and implementing regulations (46 CFR 381.7(a)-(b)) are applicable to this contract. For additional information, see the FHWA's web page:

<https://www.fhwa.dot.gov/construction/cqit/cargo.cfm>

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

COLD MILLING - COUNTY PROPERTY

Section 412 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The second sentence of **Subsection 412.01** is hereby deleted and the following is substituted therefor:

The material generated from the milling of tapers or butt joints at the beginning and end of the project, the tapers or butt joints transitioning to an existing structure, and tapers or butt joints at adjoining county roads, city streets, or highways on the project shall be transported and stockpiled at the location shown in the plans and shall become the property of the county in which the project is located or to an adjoining county as designated by the Engineer. The location and quantity of these millings will be designated on the plans or provided by the Engineer. The millings shall be stockpiled in a trapezoidal shape, or as directed by the Engineer, which can be easily measured.

Material generated from the cold milling operations for rut milling, removal of an ACHM overlay of a bridge deck, or other conditions not designated above shall become the property of the Contractor.

The following is added as the second sentence of **Subsection 412.05, Basis of Payment**:

No direct payment will be made for loading, hauling, and stockpiling of the milled material. Full payment will be considered included in the unit price bid for Cold Milling Asphalt Pavement.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

CONSTRUCTION IN SPECIAL FLOOD HAZARD AREAS

General. This special provision limits the temporary construction operations in Special Flood Hazard Areas (SFHA) as required by the National Flood Insurance Program (NFIP).

Temporary construction operations include all work and material necessary to access and construct the permanent bridge(s), culvert(s) and roadway embankment within the SFHA. These operations may include work ramps, haul roads, temporary crossings, detour roads, levees, diversion channels, retaining walls, cofferdams, forms, storage of materials, storage of large equipment, and other related work.

This project crosses a regulatory floodway, regulatory floodplain, or SFHA as shown on the community's Flood Insurance Rate Map published by the FEMA. The regulatory floodway, regulatory floodplain, or SFHA limits are shown on the plan and profile sheet(s).

The project is designed to comply with the NFIP's regulations set forth in Title 44, Chapter 1, Parts 59-77, of the United States Code of Federal Regulations (CFR).

The following special conditions must be complied with:

- Temporary operations are to be used during the low flow season when possible.
- Temporary operations shall be designed and constructed so as not to result in a significant increase in flood elevations within the community during passage of a major flood.
- Temporary operations shall not obstruct a significant portion of an existing or proposed waterway opening.
- All temporary operations shall meet the requirements of the Corps of Engineers' Section 404 Permit issued for this project.
- All temporary fills and temporary obstructions to the existing or proposed hydraulic structure (bridge(s) or box culvert(s)) must be removed in their entirety, and the affected areas returned to their preconstruction or designed elevation and condition, upon completion of the construction project.
- The Contractor is responsible for preventing equipment and materials within the floodplain from becoming buoyant and floating downstream during a significant flood event. In the event this flood starts to occur, the Contractor shall remove and/or anchor materials and equipment by means approved by the Engineer at the Preconstruction Conference.

CONSTRUCTION IN SPECIAL FLOOD HAZARD AREAS

Method of Measurement and Basis of Payment. All work, including labor, materials, tools, and equipment necessary to complete the requirements of this special provision shall not be paid for directly, but will be considered subsidiary to other items in the contract.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SPECIAL PROVISION
JOB NO. 110716
DESIGN AND QUALITY CONTROL OF ASPHALT MIXTURES

Division 400 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The eighth and tenth bullet within the first paragraph of **Subsection 404.01, Design of Asphalt Mixtures. (a) General** is hereby deleted and the following added:

- A one-gallon sample of performance grade asphalt binder to be used in all Section 405 Asphalt Concrete Hot Mix Base Course and Section 406 Asphalt Concrete Hot Mix Binder Course mix designs.
- Five blended aggregate samples for all Section 405 Asphalt Concrete Hot Mix Base Course and Section 406 Asphalt Concrete Hot Mix Binder Course mix designs.
- A two-gallon sample of performance grade asphalt binder to be used in all Section 407 Asphalt Concrete Hot Mix Surface Course mix designs.
- Ten blended aggregate samples for all Section 407 Asphalt Concrete Hot Mix Surface Course mix designs.

The last sentence of the last paragraph of **Subsection 404.01 Design of Asphalt Mixtures. (a) General** is hereby deleted and the following substituted therefor:

At least fifteen (15) business days shall be allowed for the review of the mix design.

ARKANSAS DEPARTMENT OF TRANSPORTATION**SPECIAL PROVISION****JOB NO. 110716****LIQUIDATED DAMAGES PROCEDURE FOR BID LETTINGS**

Department Standard Specification **Section 102.04 and Supplemental Specification 102-2** state that the Department reserves the right to refuse to issue, accept, or consider a proposal:

“If the prospective bidder is the Contractor on a current Contract with the Commission on which Liquidated Damages are being assessed, and there are no pending time extensions warranted to remove the project from Liquidated Damages.”

If the prospective bidder goes into liquidated damages on a current Contract with the Commission during the advertisement period for a letting, the Contractor will be notified seven business days prior to the letting that they will not be allowed to bid in the upcoming letting. This notification will be officially transmitted through Doc Express for the project in liquidated damages and via email.

Upon notification that they will not be allowed to bid in the upcoming letting, the Contractor will be provided an opportunity to request a reconsideration of this decision. This request must be transmitted in the form of a letter through Doc Express and via email to the Department for review within two (2) business days of receipt. The Department will review the reconsideration request and render a decision no later than the Friday prior to the letting.

Please note, a bid may be withdrawn at any time prior to the time specified for the bid letting. If a Contractor has been notified that they will not be allowed to bid, and they do not withdraw their bid, the bid will be considered invalid and rejected.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

MAINTENANCE OF TRAFFIC

Section 603 Maintenance of Traffic and Temporary Structures of the Standard Specifications, Edition of 2014, is hereby expanded as follows:

The Contractor shall provide additional traffic control through the project as defined below, in order to provide a safe and convenient traffic flow at all times throughout the limits of each work zone and the approaches thereto.

The Contractor shall assume full responsibility for the safe and efficient movement of traffic through the construction area for the duration of the project. Prior approval by the Engineer shall be required for any alterations of traffic patterns shown on the plans.

All traffic control devices shall be in accordance with the details shown in the plans or on Standard Drawings TC-1, TC-2, and TC-3. The Contractor will be responsible for furnishing, placing, maintaining, relocating, and subsequent removal of all traffic control devices within the limits of the project.

HWY. 185 DETOUR SITE 1:

The Maintenance of Traffic plans, Page 19, provide for a detour route for the removal of the existing bridge structure on Highway 185, construction of a Triple 8' x 6' x 69' R.C. Box Culvert on a 30 degree left forward skew with 3:1 wings, and construction of the main lane typical. Once traffic has been routed onto the planned detour route, the Contractor has 60 consecutive calendar days for the traffic to be returned to a normal pattern on Hwy. 185.

Failure to comply with this requirement will result in a lane use charge of \$1,500 per day until the lane closures on Highway 185 Site 1 are removed. A lane closure will not be considered to be removed until all advance warning devices specific to the lane closure and detour have been removed or revised. In assessing this lane use charge any portion of a day will be counted as a full day.

HWY. 318 DETOUR SITE 2:

The Maintenance of Traffic plans, Page 20, provide for a detour route for the removal of the existing bridge structure on Highway 318 Site 2, construction of a Quintuple 12' x 11' x 50' R.C. Box Culvert on a 0 degree skew with 3:1 wings, and construction of the main lane typical. Once traffic has been routed onto the planned detour route, the Contractor has 60 consecutive calendar days for the traffic to be returned to a normal pattern on Hwy. 318 Site 2.

Failure to comply with this requirement will result in a lane use charge of \$500 per day until the lane closures on Highway 318 Site 2 are removed. A lane closure will not be considered to be removed until all advance warning devices specific to the lane closure

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

MAINTENANCE OF TRAFFIC

and detour have been removed or revised. In assessing this lane use charge any portion of a day will be counted as a full day.

HWY. 318 DETOUR SITE 3

The Maintenance of Traffic plans, Page 21, provide for a detour route for the removal of the existing bridge structure on Highway 318 Site 3, construction of a Triple 10' x 7' x 72' R.C. Box Culvert on a 15 degree right forward skew with 3:1 wings, and construction of the main lane typical. Once traffic has been routed onto the planned detour route, the Contractor has 60 consecutive calendar days for the traffic to be returned to a normal pattern on Hwy. 318 Site 3.

Failure to comply with this requirement will result in a lane use charge of \$6,000 per day until the lane closures on Highway 318 Site 3 are removed. A lane closure will not be considered to be removed until all advance warning devices specific to the lane closure and detour have been removed or revised. In assessing this lane use charge any portion of a day will be counted as a full day.

The Contractor shall conduct his operations so that no equipment or personnel shall occupy any portion of the roadway that remains designated for the passage of traffic.

All three sites can be closed concurrently by the Contractor.

The Contractor shall notify the Engineer a minimum of 5 full business days prior to closing a lane. If the Contractor fails to give the proper notification, the lane closure will not be allowed until 5 full business days after the notification was given.

The Contractor will regulate the access of work vehicles and equipment to the work area while ensuring safety to the traveling public and minimum damage to highway facilities. Any damage to the highway facility or vegetation caused by the Contractor shall be repaired at no cost to the Department. Unless operating within the area closed to traffic, the Contractor's work vehicles shall travel in the direction of the normal traffic flow. Only those vehicles necessary for the work shall be allowed in the work zone. All other vehicles shall be parked at a safe location outside the work zone, as approved by the Engineer.

General equipment storage areas or operations centers will be allowed within the limits of the right of way only where permitted by the Engineer. At the end of the work day, equipment shall be either shielded from traffic by an approved positive barrier or placed so it is not within 30 feet of any lane carrying traffic.

The Contractor shall conduct his operations so that no equipment or personnel shall occupy any portion of the roadway that remains designated for the passage of traffic.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

MAINTENANCE OF TRAFFIC

BASIS OF PAYMENT: There shall be no direct payment for fulfilling the requirements of the Special Provision, but compensation shall be considered included in the price bid for Maintenance of Traffic.

Traffic control devices, where shown on the plans for payment, will be paid for at the contract unit price for each item involved. All additional traffic control devices beyond the contract amount shall be provided, maintained, and replaced, if necessary, at no cost to the Department.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

MANDATORY ELECTRONIC CONTRACT

Paper Contract Documents and Forms will not be accepted.

The Department will only accept and execute an electronic contract for this project through Doc Express, a paperless contracting system. Prospective bidders will need to contact Doc Express to set up an account prior to the bid opening date. The toll-free phone number for Doc Express is 1-888-352-2439 and their website address is www.docexpress.com.

Section 103 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows.

The first sentence of **Subsection 103.06(a)** is hereby deleted, and the following substituted therefore:

The Contract shall be electronically signed by the successful bidder and electronically submitted to the Program Management Division, Construction Contract Procurement Section, together with the required bonds and proof of liability insurance, within 10 business days after the notice of award has been issued.

Subsection 103.08(d)(3)d. is hereby deleted, and the following substituted therefore:

Documentation of the bidder's commitment to use a DBE subcontractor whose participation it submits to meet a contract goal; and

Subsection 103.08(d)(3)e. is hereby deleted, and the following substituted therefore:

Document confirmation from the DBE that it is participating in the contract as provided in the Contractor's commitment.

Subsection 103.08(d)(5) is hereby deleted, and the following substituted therefore:

The preceding information shall be submitted directly to the Arkansas Department of Transportation, Program Management Division, via Doc Express.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

MANDATORY ELECTRONIC DOCUMENT SUBMITTAL

Paper Document Submittals will not be accepted.

The Department will only accept electronically-submitted documents for consideration on this project. All correspondence and submittals to the Department shall be submitted through Doc Express, a paperless contracting system. When signed originals are required, the original shall be the document uploaded to Doc Express and the signature shall be the electronic signature applied through Doc Express. The Contractor shall use the same organizational account for project documentation as used to fulfill the requirements of the Mandatory Electronic Contract Special Provision. The toll-free phone number for Doc Express is 1-888-352-2439 and their website address is www.docexpress.com.

Any reference in the Standard Specifications to document submittal in writing or by U.S. Mail, facsimile, or in person is hereby amended to require that such documents be submitted using Doc Express with the following exceptions:

- Material delivery tickets which are used for payment or for field verification shall be submitted on paper as required by the Standard Specifications for Highway Construction, Edition of 2014.
- Any document with specific submittal requirements in state and/or federal law or federal regulations that conflict with the requirements of this Special Provision shall be submitted in accordance with such state and/or federal law or federal regulations.

A user guide is available on the Department's web page to assist Contractors with the use of Doc Express. The "Contractor Guide to Using Doc Express" is available on the Department's web page at <https://ardot.gov/divisions/construction/doc-express/>.

The Contractor may provide access for subcontractors to view and submit items in Doc Express by following the instructions provided in the "Contractor Guide to Using Doc Express". Once an organizational account is activated and the Contractor provides access to the contract, a subcontractor may submit documents to the Contractor in Doc Express by uploading the electronic documents as directed in the User Guide. Any documents uploaded by the subcontractor must be then retrieved and published by the Contractor within Doc Express for further action by the Engineer. The Engineer will not review or take any actions on any documents submitted by the subcontractor until the document has been appropriately submitted by the Contractor.

Any submittals, documents, subcontracts, proposals, working drawings, or any other items submitted by the Contractor within Doc Express are not considered approved by the Engineer until written notification of the approval is published by the Engineer in the "CON-Correspondence-From Department to Contractor" drawer in Doc Express. Any action taken by the Contractor prior to this notification is taken at the Contractor's own risk.

The Department's System Administration team has no authority to take action on any documents submitted to the system. Access for this team is for management of the application only. Knowledge of any document submitted is not imputed to the Department by the knowledge of Systems Administration.

The requirements of this Special Provision shall supersede the requirements of all other Special Provisions unless such Special Provision includes a stated exception to this Special Provision.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SPECIAL PROVISION
JOB 110716
NESTING SITES OF MIGRATORY BIRDS

DESCRIPTION: All structures on this project, including new, temporary, and existing bridges and/or culverts, may be the nesting sites of migratory birds. These birds include, but are not limited to, swallows and phoebes. The birds and their habitat are protected under the Migratory Bird Treaty Act. Demolition of or construction activities on bridge and culvert structures that might disrupt egg incubation or feeding and sheltering of young migratory birds shall not occur without written permission from the Engineer.

If construction is planned on bridges or culverts when migratory birds are actively building nests, the Contractor shall utilize Option 1 and/or 2 below to deter birds from nesting to allow construction activities to proceed.

CONSTRUCTION METHODS: Restrictions to the Contractor's activities shall include, but are not limited to, the following:

- 1) Demolition of or construction activities on structures (i.e. sand blasting, painting, etc.) will not be permitted when migratory bird nests are considered active without written permission from the Engineer. This normally occurs in Arkansas from March 1 to August 31, but may occur outside of those dates during unusual weather events. The Contractor shall submit to the Engineer details for all work proposed to be performed on the structure from March 1 to August 31, or while nests are active with eggs or young. A determination will be made by the Engineer within 10 business days concerning the possible impacts of the work and will then accept or reject the Contractor's proposal.
- 2) **OPTION 1** - The Contractor shall prevent birds from nesting by erecting netting at any time outside of the active nesting season (generally after August 31 to March 1). The Contractor may be allowed to erect netting during the active nesting season if no active nest is present on the bridge or structure. Net openings shall be ½ inch or smaller after installation. Birds that nest despite prevention efforts shall not be removed or disturbed. Netting shall be installed securely and maintained in such a manner that it will not pose a safety hazard.
- 3) **OPTION 2** – The Contractor may remove inactive nests (those with no eggs or young) via hydro-cleaning or scraping at any time outside of the nesting season (generally after August 31 to March 1). The Contractor will be allowed to scrape or hydro-clean daily to remove any mud or debris placed on the structure by birds attempting to nest, as long as there are no eggs or young in the nests or partial nests. Adult birds cannot be harmed, injured, or harassed in any way except by removal of the unoccupied nests. Exclusionary netting does not have to be used if the Contractor agrees to be diligent and make sure no birds are allowed to nest on the structure.
- 4) No other methods of deterrence will be permitted without written approval of the Engineer.
- 5) Migratory birds can build nests very quickly, specifically, in less than two days. If the Contractor allows even one nest on the structure to become active (containing eggs or young birds), they shall be required to stop construction/demolition until the young have voluntarily left the nest (up to six weeks), or get approval through the Engineer from the ARDOT Environmental Division to work around the birds in a manner that does not disrupt incubation, feeding, and/or sheltering of the birds.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SPECIAL PROVISION
JOB 110716
NESTING SITES OF MIGRATORY BIRDS

- 6) If no birds are nesting on or in the bridge or culvert structures between March 1 and August 31, a request may be made to the Engineer to allow demolition or construction to proceed. The Engineer will make the final determination concerning the presence or absence of nesting migratory birds within ten business days and will accept or reject the Contractor's proposal concerning the demolition or construction.

CONTRACTOR NEGLIGENCE: The Contractor will be assessed the amount of any and all fines and penalties assessed against and costs incurred by the Department which are the result of the Contractor's failure to comply with this Special Provision. The Department will not be responsible for any delays or costs due to the Contractor's failure to comply with this special provision. The Contractor will not be granted additional compensation or contract time due to noncompliance.

METHOD OF MEASUREMENT AND BASIS OF PAYMENT: All costs incurred in complying with this Special Provision will not be measured or paid for separately, but will be considered included in the contract unit prices bid for other items of the contract.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

PARTNERING REQUIREMENTS

Section 104 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The following is added to **subsection 104.01**:

The Department encourages on this project the establishment and use of a voluntary cohesive partnership agreement between the Department and its Prime Contractor and subcontractors. Toward this end, a partnership may be structured between these parties to draw on the strengths of each to identify and achieve their mutual goals. The objectives of this are:

- Effective contract performance,
- Efficient contract performance,
- Completion of the project within budget,
- Completion of the project on schedule, and
- Construction of the project in accordance with the contract.

This partnership will be shared equally between the Department and the Prime contractor and subcontractors. Participation in this "partnering" concept is voluntary on this project. The Prime Contractor and approved subcontractors shall bear the costs associated with their personnel's time while participating in seminars, workshops, and meetings for successful "partnering" on this project.

In order to obtain a successful partnering relationship and agreement, the Department shall arrange for a partnership development/team building workshop prior to the preconstruction conference. Persons required to attend this workshop are:

- Contractor and approved Subcontractor President, Vice President, or General Superintendent,
- Contractor and approved Subcontractor project Superintendent,
- Department District Engineer,
- Department Resident Engineer,
- Appropriate Department Design personnel,
- Department Staff Construction Engineer, and
- Department Area Materials Engineer.

The Federal Highway Administration and other interested parties shall be invited to attend and participate, but their attendance will not be required.

The Department and/or the Contractor may bring other personnel at their option.

Follow-up meetings shall be held periodically throughout the duration of the contract. The establishment of a partnership charter on this project will not change the legal relationship of the Department and the other participating parties to the contract nor relieve either party from any of the terms of the contract.

The partnership agreement shall NOT constitute authority to change the contract, plans, or Specifications.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

PLASTIC PIPE

Section 606 Pipe Culverts of the Standard Specifications for Highway Construction, Edition of 2014, is hereby expanded to include the following:

Subsection 606.02(d)(1) is hereby deleted and the following is substituted therefore:

(1) Polyethylene Pipe. The manufacture and furnishing of high density polyethylene pipe ranging in diameter from 18" (450mm) minimum to 48" (1200mm) maximum shall be according to AASHTO M 294, Type S. Polyethylene pipe shall have a corrugated outer shell with an essentially smooth wall waterway. Couplings and fittings supplied or recommended by the pipe manufacturer shall be used.

Subsection 606.02(d)(2) is hereby deleted and the following is substituted therefore:

(2) PVC Pipe. The manufacture and furnishing of PVC pipe ranging in diameter from 18" (450mm) minimum to 36" (900mm) maximum shall be according to ASTM F949, Cell Classification 12454. PVC pipe shall have annular or helical projections or ribs on the outer surface and an essentially smooth wall waterway. Couplings and fittings supplied or recommended by the pipe manufacturer shall be used.

The following is added as Subsection 606.02(d)(3):

(3) Polypropylene Pipe. The manufacture and furnishing of polypropylene pipe ranging in diameter from 18" (450mm) minimum to 60" (1500mm) maximum shall be according to AASHTO M330, Type S Polypropylene pipe shall have a corrugated outer shell with an essentially smooth wall waterway. Couplings and fittings supplied or recommended by the pipe manufacturer shall be used.

Subsection 606.02(k) is hereby deleted and the following is substituted therefore:

(k) Structural Bedding and Structural Backfill for Plastic Pipe Culverts shall meet the requirements for the material shown in the Plans and shall meet the requirements as shown in Subsection 302.02 of these Specifications except that the maximum particle size shall be 1" (25.4mm) for Structural Bedding and 1½" (37.5mm) for Structural Backfill.

Subsection 606.03.(a) second paragraph is hereby deleted and the following is substituted therefore:

Pipe culverts under the roadbed shall be so placed that the minimum depth of cover for pipe of any diameter or type shall be not less than the minimum cover as shown in the Plans, including a minimum of 12" (304.8mm) of pavement and/or base.

The following is added as Subsection 606.03(h):

(h) Acceptance Testing of Installed Polyethylene, PVC, and Polypropylene Pipe. All plastic pipes installed for storm drainage systems shall be tested for acceptance by the Contractor using a method consisting of, but not limited to, the following: electronic deflectometers, video cameras, or go/no-go mandrel. These tests shall be conducted not less than 30 days following installation of the pipe. The Engineer will witness all tests.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

PLASTIC PIPE

At least 10 percent of the total quantity of each size of plastic pipe installed for storm drainage on the project shall be inspected for deformations using one of the approved methods listed above. The Engineer may select the areas to be tested. If the test indicates excessive deflection in the selected length of pipe, the Engineer may require additional lengths of pipe be tested in increments of 10 percent of the total installed length. Any pipes with a reduced diameter of 5 percent of the actual inside pipe diameter shall be removed and re-laid, if undamaged, or replaced with a new pipe at no cost to the Department. Re-laid pipe and new pipe shall be retested at no cost to the Department.

If the mandrel test is selected, a nine-point mandrel with a diameter equal to 95 percent of the nominal diameter of the pipe shall be used. The mandrel shall be of a shape similar to that of a true circle enabling the gauge to pass through a satisfactory pipeline with little or no resistance and shall be designed to prevent tipping from side to side and to prevent debris build-up from occurring between channels of the adjacent fins or legs. Each end of the mandrel shall have fasteners for attaching pulling cables. The mandrel shall have nine various sized fins or legs of appropriate dimensions for various diameter pipes. Each fin or leg shall have a permanent marking that states its designated pipe size. For acceptance testing, the mandrel must pass through the entire section between manholes or other structures in one pass when pulled by hand without the use of excessive force.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

PRICE ADJUSTMENT FOR ASPHALT BINDER

A price adjustment clause is included in this Contract to provide additional compensation to the Contractor or a credit to the Department for fluctuations in asphalt binder prices. This price adjustment is dependent upon a change in the average price of asphalt binder which results in an increase or decrease in the price of products utilized on this project.

Payment. Payment will be made to the Contractor for monthly fluctuation in the price of asphalt binder used in performing the applicable items of Asphalt Concrete Hot Mix and Ultrathin Bonded Wearing Course work as listed in the table below when the asphalt binder price fluctuates from the base price defined below. Payment may be positive, negative, or nonexistent depending on the circumstances. Payments or deductions for the asphalt binder price adjustment will be included in the Contractors current estimates, and the payment or deduction authorized for each estimate will be based upon the quantities for applicable items of work.

The Asphalt Binder Price Adjustment will be a dollar amount paid as compensation to the Contractor, or as a credit to the Department as reflected on the Current (or Final) Estimate Summary Report as Payment Adjustments.

Asphalt Binder Price Adjustment (ABPA). The Asphalt Binder Price Adjustment (ABPA) for the current estimate will be computed according to the following formula:

$$ABPA = Q \times D \times (IQP / 100)$$

Where

- ABPA = Asphalt binder price adjustment, in dollars;
Q = Quantities paid for the applicable items on the current estimate; tons of mix for ACHM items or square yards for Ultrathin Bonded Wearing Course
D = Allowable price differential, in dollars;
IQP = Item Quantity Percent, Quantity of Indexed Material per unit of the applicable item on the current estimate.

The above formula will be applied to each individual payment of the applicable item. When the Current (or Final) estimate is generated, the sum of these individual adjustments will be included as a Payment Adjustment.

Applicable Items of Work		
ITEM OF WORK	SPECIFICATION NUMBER	ITEM QUANTITY PERCENT
Asphalt Binder in ACHM Base Course	405	100
Asphalt Binder in ACHM Binder Course	406	100
Asphalt Binder in ACHM Surface Course	407	100
Ultrathin Bonded Wearing Course (Type B)	SP	5.5
Ultrathin Bonded Wearing Course (Type C)	SP	5.4

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

PRICE ADJUSTMENT FOR ASPHALT BINDER

The terms of this Special Provision will apply only to the items listed in this Special Provision table above. No other items on the contract will be subject to the terms of this Special Provision.

The allowable price differential, "D", for the current estimate will be computed according to the following formula, using the appropriate binder grades:

$$D = P - P(b)$$

P, the asphalt binder current price in dollars per ton, is the Monthly Asphalt Binder Price Index for the month in which the payment entry is entered.

P(b), the asphalt binder base price in dollars per ton, is the Monthly Asphalt Binder Price Index for the month in which the bids for the work were received.

Asphalt Binder Index Determination.

PG64-22 Binders. The Monthly Asphalt Binder Price Index for PG64-22 binders will be determined by calculating the average for performance-graded binder using the Selling Price of PG 64-22 paving grade. The monthly asphalt binder price will be an average of five asphalt binder prices. The prices will be furnished by the four largest asphalt binder suppliers in the State of Arkansas as determined by the previous calendar year. For an asphalt supplier to be included in the asphalt binder price index they must supply at least ten percent of the asphalt binder in Arkansas. The final component in the asphalt binder price index will be the Asphalt Weekly Monitor® furnished by Poten & Partners, Inc. The issue of the Asphalt Weekly Monitor® used will be for the last full week in the previous month received by the Department prior to the first day of the index month. The four largest suppliers included in the asphalt binder price index shall furnish the Department with their average price on the Thursday before the Friday of the last full week of the month. If any supplier fails to submit a price by this deadline, that supplier's price will not be included in the asphalt binder price index for that month.

PG70-22 and PG76-22 Binders (including Asphalt Binder in Ultrathin Bonded Wearing Course). The monthly Asphalt Binder Price Index for PG70-22 and PG76-22 binders (including asphalt binder in Ultrathin Bonded Wearing Course) will be determined by the same method above, except that the price from the Asphalt Weekly Monitor® will not be used in the calculation of the monthly average binder price. The monthly asphalt binder price for PG70-22 and PG76-22 binders will be calculated using the average of the prices supplied by the four largest binder suppliers in the State for those grades.

Supplemental Items Subject to Adjustment. Items included in the contract that are listed in the table above are subject to adjustment in accordance with this provision, regardless of any amount of overrun to the plan quantity. Any new items of work added to the Contract by supplemental agreement that are listed in the table above will be subject to the asphalt binder price adjustments in accordance with this provision. The base asphalt binder price, P(b), for any newly added eligible items will be the same P(b) as the eligible items in the Contract, and the new unit price established by supplemental agreement will be determined accordingly.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

PRICE ADJUSTMENT FOR ASPHALT BINDER

Viewing Asphalt Binder Price Index. Historical asphalt binder price index values will be available in the "Asphalt Binder Index Report" document located on the ARDOT website at <https://ardot.gov/divisions/construction/construction-information/> under Asphalt Binder Information.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

PRICE ADJUSTMENT FOR FUEL

A price adjustment clause is included in this Contract to provide additional compensation to the Contractor or a credit to the Department for fluctuations in diesel fuel prices. This price adjustment is dependent upon a change in the average price of fuel which results in an increase or decrease in the price of products utilized on this project. For the purposes of this specification, it is assumed that all fuel used is diesel fuel and that the fuel use factors shown in the table below cover all fuel used in delivery to the plant, production, hauling to the job site, placement, and finishing of the items of work shown.

Payment. Payment will be made to the Contractor for monthly fluctuation in the price of diesel fuel used in performing the applicable items as listed in the table below when the diesel fuel price fluctuates from the base price defined below. Payments may be positive, negative, or nonexistent depending on the circumstances. Payments or deductions for the fuel price adjustment will be included in the Contractor's current estimates, and the payment or deduction authorized for each estimate will be based upon the quantities for applicable items of work. Subcontracts should include the payment or deduction of fuel price adjustments on pay items listed in the table below when those items are included in a subcontract.

The Fuel Price Adjustment will be a dollar amount paid as compensation to the Contractor, or as a credit to the Department as reflected on the Current (or Final) Estimate Summary Report as Payment Adjustments.

Fuel Price Adjustment (FPA). The Fuel Price Adjustment (FPA) for the current estimate will be computed according to the following formula:

$$FPA = Q \times F \times D$$

Where

- FPA = Fuel price adjustment, in dollars;
- Q = Quantities paid for the applicable items on the current estimate,
- F = The Fuel Use Factor for the applicable items of work subject to this price adjustment, as listed in the table below,
- D = Allowable price differential, in dollars.

The above formula will be applied to each individual payment of the applicable item. When the Current (or Final) estimate is generated, the sum of these individual adjustments will be included as a Payment Adjustment.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

PRICE ADJUSTMENT FOR FUEL

Fuel Use Factors		
Item of Work	Specification Numbers	Fuel Use Factor Per Unit
Earthwork: (Unclassified Excavation, Compacted Embankment, Selected Material)	210,302	0.34 gal./C.Y.
Soil Stabilization	Special Provision	2.28 gal./ton
Shaping: (Shaping Roadway Section, Subgrade Preparation, Trenching and Shoulder Preparation, Scarifying and Recompacting Shoulders)	213,214,215,216	2.52 gal./Station
Base Course and Stone: (Stone Backfill, Aggregate Base Course, Soil Aggregate in Cement Treated Base Course, Aggregate in Cement Stabilized Crushed Stone Base Course, Mineral Aggregate in Asphalt Surface Treatment)	207,303,307,308,309,310,402	0.54 gal./ton
ACHM Paving: (ACHM Base Course, ACHM Binder Course, ACHM Surface Course, Open Graded Asphalt Base Course)	405,406,407,417	2.36 gal./ton
Ultra-Thin Bonded Wearing Course (All Types)	Special Provision	2.18 gal./ton
Milling: (Cold Milling Asphalt Pavement, Grinding Portland Cement Concrete Pavement)	412, 510	0.18 gal./S.Y.
PCC Paving: (Portland Cement Concrete Base, Open Graded Portland Cement Concrete Base, Portland Cement Concrete Pavement, High Early Strength Concrete Pavement, Continuously Reinforced Concrete Pavement, Portland Cement Concrete Driveway)	309, 310,501,503,505	0.44 gal./S.Y.
Structural Concrete (Approach Slabs, Approach Gutters, Class B Concrete-Bridge, Class S Concrete-Bridge, Class S(AE) Concrete-Bridge, Seal Concrete-Bridge, Class A Concrete-Roadway, Class S Concrete-Roadway)	504, 802	1.75 gal./C.Y.
Flatwork: (Concrete Ditch Paving, Concrete Islands, Concrete Walks, Wheelchair Ramps)	605,632,633,641	0.30 gal./S.Y.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

PRICE ADJUSTMENT FOR FUEL

When the units of measure in this contract for the items of work listed in the table do not correspond with the units shown in the table (i.e. Asphalt Concrete paid by the square yard, etc.), those items will not be subject to the terms of this special provision or any fuel price adjustment.

The allowable price differential, "D", for the current estimate will be computed according to the following formula:

$$D = P - P(b)$$

P, the current fuel price in dollars per gallon, is the Monthly Fuel Price Index for the month in which the payment entry is entered.

P(b), the fuel base price in dollars per gallon, is the Monthly Fuel Price Index for the month in which the bids for the work were received.

Fuel Price Index Determination. The Monthly Fuel Price Index will be determined by using the On-Highway retail price for No. 2 Diesel Fuel – ULS (Ultra Low Sulfur), as listed for the US Gulf Coast region on the U.S. Energy Information Administration's website. The value used will be that for either the closest Monday prior to the first calendar day of the index month or the first calendar day of the index month, if that is a Monday.

<https://www.eia.gov/opendata/qb.php?sdid=PET.EMD EPD2DXL0 PTE R30 DPG.W>

Supplemental Items Subject to Adjustment. Items included in the contract that are listed in the table above are subject to adjustment in accordance with this provision, regardless of any amount of overrun to the plan quantity. Any new items of work added to the Contract by supplemental agreement that are listed in the table above will be subject to the fuel price adjustments in accordance with this provision. The base fuel price, P(b), for any newly added eligible items will be the same P(b) as the eligible items in the Contract, and the new unit price established by supplemental agreement will be determined accordingly.

Viewing Fuel Price Index. Historical fuel price index values will be available in the "Asphalt Binder Index Report" document located on the ARDOT website under Fuel Price Information at <https://ardot.gov/divisions/construction/construction-information/>.

Opt Out Option. The Contractor, at its own discretion, can choose to opt out of the adjustments for fuel prices determined by this special provision. If the Contractor wishes to utilize this option, an authorized representative of the firm must sign the form on Page 4 of this special provision and submit it to the Department at PMD@ardot.gov prior to the time and date of the bid letting for this project. This representative must currently be listed with the Department as an officer approved to sign contracts in the firm's name.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

PRICE ADJUSTMENT FOR FUEL

OPT OUT OF PRICE ADJUSTMENTS TO FUEL

As an authorized representative of this company, I hereby choose the option to opt out of the price adjustments for fuel for all pay items allowable by this special provision for this contract. By signature of this form, my firm waives all payment adjustments for fuel indexing for the duration of this project and waives any subsequent appeals for additional compensation for fuel price fluctuations.

This action only applies to the construction contract for the job number listed in the header of this document.

Printed Name: _____ Title: _____

Signature: _____ Date: _____

Company Name: _____

NOTE: To opt out, this completed form must be submitted to the Department at PMD@ardot.gov prior to the time and date of the bid letting for this project.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

**PROHIBITION OF CERTAIN TELECOMMUNICATIONS AND
VIDEO SURVEILLANCE SERVICES OR EQUIPMENT**

In accordance with the requirements of 2 CFR 200.216, equipment utilized on this project for telecommunications and video surveillance services or equipment shall not be produced by:

- 1) Huawei Technologies Company or ZTE Corporation (or any subsidiary or affiliate of such entities).
- 2) Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, or Dahua Technology Company (or any subsidiary or affiliate of such entities).

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

SHORING FOR CULVERTS

DESCRIPTION: Work under this item shall consist of the design, construction, and removal of a shoring or bracing system that may be required to retain the existing, temporary, or new roadway embankment and to maintain traffic during construction of culverts. The shoring system shall provide sufficient clearance for excavation and construction work and shall ensure the safety of the traveling public and workmen at all times.

WORK TO BE PERFORMED: Prior to construction of the shoring system, the Contractor shall submit the design and details of the system to the Engineer for informational and record purposes. Such submission shall include the design calculations, the kind and condition of materials to be used, working drawings showing all dimensions, and the procedure for installation of the system. The design and details submitted shall be prepared and/or approved by a Professional Engineer registered in Arkansas.

The Contractor shall be responsible for the adequacy of the temporary shoring during the entire period of construction. The Contractor shall be responsible for any and all damages and/or claims, including injury or death, arising out of the construction and use of temporary shoring.

The Contractor shall construct the shoring in accordance with the details submitted to the Engineer for informational purposes. Unless otherwise permitted by the Engineer, all components of the shoring system shall be removed upon completion of their use and shall remain the property of the Contractor.

PAYMENT: No direct payment will be made for work described in this special provision (which includes preparation of necessary design details and drawings, construction and removal of shoring, and for all materials, labor, tools, equipment, and incidentals necessary to complete the work) but shall be considered subsidiary to other pay items in the contract.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

SOIL STABILIZATION

Section 210 Excavation and Embankment of the Standard Specifications, Edition of 2014, is hereby amended as follows:

Subsection 210.07 Construction Requirements is expanded to include the following:

At locations that the Engineer designates the existing soils to be unstable and cannot be stabilized through normal drying and compactive efforts, the Contractor may, with the approval of the Engineer, utilize the following additives to expedite the drying process:

- Quicklime (dry) meeting the requirements of Subsection 301.03(b), or
- Portland cement and/or fly ash meeting the requirements of Subsection 307.03(b)

The Engineer shall determine which additive will be used. The rate of application shall be determined by trial mixing and shall be approved by the Engineer. The spreading and mixing procedure used shall thoroughly and uniformly disperse the material into the soil. Any procedure that results in excessive loss of material or that does not achieve the desired results shall be immediately discontinued.

Subsection 210.12 Method of Measurement is expanded to include the following:

- (g) Soil Stabilization will be measured by the ton of the additive used.

Subsection 210.13 Basis of Payment is expanded to include the following:

- (d) Soil Stabilization completed and accepted and measured as provided above will be paid for at the contract unit price bid per ton for Soil Stabilization, which price shall be full compensation for furnishing, hauling and placing the material; for spreading and mixing; and for all labor, equipment, tools and incidentals necessary to complete the work.

Payment will be made under:

Pay Item	Pay Unit
Soil Stabilization	Ton

ARKANSAS DEPARTMENT OF TRANSPORTATION

JOB NO. 110716

STORM WATER POLLUTION PREVENTION PLAN

**National Pollution Discharge Elimination System
General Permit # ARR150000**

Prepared for:

ARKANSAS DEPARTMENT OF TRANSPORTATION

Date: July 22, 2025

GENERAL INFORMATION:

A Storm Water Pollution Prevention Plan (SWPPP) has been developed by the ARDOT for this construction project in accordance with good engineering practice. Various items constitute the SWPPP for the project and should be provided for persons requesting to view the SWPPP, including:

- a) *The ARDOT Standard Specifications for Highway Construction, 2014 Edition*, (Standard Specifications). The following sections are in reference to water quality or sediment and erosion control: Sections 107, 110, 620, 621, 622, 623, 624, 626, and other sections pertaining to storm water controls.
- b) The Construction Plans contain temporary and permanent erosion controls and permanent storm water management measures.
- c) Contract documents provide the Contractor and ARDOT with additional specifications. These may include Supplemental Specifications and Special Provisions. Parts of the SWPPP that may be in the Contract include this Special Provision, *Storm Water Pollution Prevention Plan*.
- d) Project records including SWPPP inspection reports, the authorized Site Manager daily work report, and various pay quantity documentation, all of which detail the progression of work on the project, when erosion control measures were taken, when the Contractor was given instructions to install or maintain the erosion and sediment control (E&SC) items, and the timing and details of E&SC installation. The Contractor identification form and the Inspector identification form are included as part of the project records.
- e) Construction site posting.
 - i. For large construction sites (all sites five acres or above) – The first page of the *e-Portal* DEQ Notice of Intent (NOI) submission, if ten business days have passed since the NOI was deemed complete, to be replaced by the completed Arkansas Division of Environmental Quality (DEQ) Authorization Letter to Discharge Storm Water when it is sent by DEQ.
 - ii. For small construction sites under five acres (automatic coverage sites) - the completed DEQ Notice of Coverage for small sites from the DEQ website.

PROJECT NAME AND LOCATION:

Job No. 110716, Hwys. 185 & 318 Strs. & Apprs.(S)

ARKANSAS DEPARTMENT OF TRANSPORTATION

JOB NO. 110716

STORM WATER POLLUTION PREVENTION PLAN

OPERATOR NAME AND ADDRESS:

Arkansas Department of Transportation

Name of District Engineer Cannon Callicott

Address of District Headquarters

2701 U.S. Highway 4, P.O. Box 278

Wynne, AR 72396

Name of Resident Engineer (Contact Person) Donnie Henson

Contact Number (870) 572-6026

A. Site Description

- 1) Pre-construction Topographic view: Refer to the plan and profile sheets for topographic and waterbody information.
- 2) Project Description and Intended Use after Notice of Termination (NOT) is filed:
The project consists of the replacement of three structures in Phillips County. The project includes asphalt overlay at Highway 318 at Site 3. The structures are #M3630 at log mile 1.47 on section 1 of Highway 185 and #M3806 at log mile 4.00 and #M3814 at log mile 13.08 on sections 2 and 3, respectively on Highway 318.

3) Sequence of Activities:

The sequence of Major Soil Disturbing Activities is shown below. **Be aware that the sequence below is provided as a general course of action for the progression of construction activities. Actual sequence of construction will be determined by the Contractor's schedule and field conditions.**

- a. Clearing and grubbing construction area.
- b. Excavation and embankment for reconstructed roadway.
- c. Grading of sideslopes to prepare for surfacing.
- d. Construction of R.C. box culvert.
- e. Placement of roadway surfacing.

4) Total Acres Available: 5.08 Total Disturbed Area: 3.46

(*Note: Any off-site borrow or waste areas are operated by the Contractor, who is responsible for obtaining any required NPDES permits for the sites. The "total acres available" and "total disturbed areas" shown here do not include areas covered under permits obtained by another operator. The Contractor is also responsible for meeting local regulations regarding these sites, including those of a Qualifying Local Program).

ARKANSAS DEPARTMENT OF TRANSPORTATION
JOB NO. 110716
STORM WATER POLLUTION PREVENTION PLAN

5) Existing Site Information:

a. Runoff Coefficient Based on Attachment C:

Before construction starts, the site has a runoff coefficient of 0.39

After construction is completed, the site will have a runoff coefficient of 0.42

b. Soil Information _____

B. Responsible Parties-General Contractors, Inspectors, etc:

Refer to Contractor identification form in Section S and the Inspector identification form in Section T. This information will be completed after the Pre-construction conference.

C. Receiving Waters: (Permit Pg. 3 of Part II)

1) Location of Surface Water on Construction Site:

The following surface waters are located on the construction site. List them by name with Station Numbers.

- a. Ditch, Sta. 17+07
- b. Beaver Bayou Ditch, Sta. 35+27
- c. Jessie Slough, Sta. 45+29

2) The following bodies of water receive runoff from the construction site:

Name of Operator of Municipal Storm Sewer and/or Receiving Stream: Beaver Bayou Ditch

Narrative Description of Nearest Water: Beaver Bayou Ditch thence to Big Creek

Name of Ultimate Receiving Water: Lick Creek, White River

Waterbodies that would require the fifty (50) foot buffer zone are Extraordinary Resource Waters (ERW), Ecologically Sensitive Waterbodies (ESW), Natural and Scenic Waterways (NSW), waterbodies with approved TMDLs, waterbodies on the 303(d) list, and/or other uses at the discretion of the Director of DEQ.

Above categorized waterbodies, if any on project, list both waterbody and qualifier:

N/A

D. TMDL and 303(d) list can be found at:

(<https://www.adeq.state.ar.us/water/planning/integrated/tmdl/>)

- 1) 303(d) Listed Waters - Select the following appropriate statement utilizing information received from the Environmental Division.

ARKANSAS DEPARTMENT OF TRANSPORTATION

JOB NO. 110716

STORM WATER POLLUTION PREVENTION PLAN

Statement 1:

 X Storm water discharges from this site do not enter a waterbody on the list of waters impaired for turbidity or other pollutant which could be impacted by roadway construction on the 303(d) list.

Statement 2:

 Storm water discharges from this construction site enter a waterbody on the list of impaired waterbodies (303d list) for turbidity and/or other pollutant. The SWPPP has been developed with BMPs which are designed to minimize the discharge of these pollutants to the maximum extent practicable. Condition of sediment control BMPs will be monitored during regular inspections to ensure this goal is met.

- 2) TMDL Waters - Select the following appropriate statement utilizing information received from the Environmental Division.

Statement 1:

 X Storm water discharges from this site do not enter a waterbody with an approved TMDL for turbidity or other pollutant which could be impacted by roadway construction.

Statement 2:

 Storm water discharges from this construction site enter a waterbody with an established TMDL allocation for turbidity and/or other pollutant. A TMDL has been written for the waterbody that is applicable to the construction project. The following information documents the construction projects compliance with the TMDL:

- 1.) List TMDL assumptions and allocations: _____

- 2.) List measures taken to ensure that the discharge of pollutants from the site is consistent with the assumptions and allocations of the TMDL. _____

E. Discharges to ERW, NSW, or ESW:

Statement 1:

 X The construction site is not located within a watershed of an ERW, ESW, or NSW.

Statement 2:

 The construction site is located within a watershed of an ERW, ESW, or NSW. Additional BMPs have been considered for implementation in these areas.

ARKANSAS DEPARTMENT OF TRANSPORTATION
JOB NO. 110716
STORM WATER POLLUTION PREVENTION PLAN

F. Watershed of Potential Losing Stream and/or Sensitive Aquatic Species:

Statement 1:

 X The construction site is not located within a watershed of a potential losing stream and or sensitive aquatic species.

Statement 2:

 The construction site is located within a watershed of a potential losing stream and or sensitive aquatic species. Additional BMPs have been considered for implementation in these areas.

G. Attainment of Water Quality Standards after Authorization: (Permit Pg. 4 of Part II)

BMPs have been selected and will be installed and maintained at the construction site to minimize the discharge of pollutants as necessary to meet applicable water quality standards.

H. Site Map: See Attachment A for items to be included. All of these items should be marked on the job plans maintained for the SWPPP.

I. Storm Water Controls

1. Initial Site Stabilization, Erosion, & Sediment Controls: (Permit Pg. 5 of Part II)

Complete descriptions and specifications for control measures may be found in the ARDOT's Standard Specifications for Highway Construction, Supplemental Specifications, Special Provisions, Construction Contract, and Construction Plans. **All controls are designed and installed with the primary goal of retaining sediment on site to the maximum extent practicable.**

Insert a description below of the construction activities that are a part of the initial site disturbance and stabilization, along with the appropriate controls measures and time of installation for that activity. This information should be provided by the Contractor at the Pre-construction meeting.

Be aware that the list is general. Actual timing of erosion control installations will be determined daily based upon the construction activity occurring and actual field conditions.

(Construction Activity/Control/Timing)

- 1) Clearing and grubbing, removal and disposal of items.
- 2) Stabilize with temporary seeding as area is cleared.
- 3) Construct embankments and excavate ditches. Install ditch checks and silt fence as needed.
- 4) Finalize grading. Stabilize permanent erosion control.
- 5) Final surface.

ARKANSAS DEPARTMENT OF TRANSPORTATION
JOB NO. 110716
STORM WATER POLLUTION PREVENTION PLAN

2. Stabilization Practices: (Permit Pg. 6 of Part II)

List of Stabilization Practices to be utilized and scheduling of implementation for that practice:

- ☒ Dust control - wet down dusty areas as needed/ongoing
- ☒ Erosion control matting - As directed by the Engineer
- Geotextiles -
- ☒ Limiting disturbed area - will be limited by Engineer as discussed in Subsection 110.05(d) of Standard Specifications/ongoing
- ☒ Mulches -
- Mulch control netting -
- ☒ Off-site tracking controls (Either stabilized exits and/or wheel washing)*
- Preserving existing vegetation - as shown on the job plans/ongoing
- ☒ Sod stabilization - As shown on the job plans
- ☒ Temporary and permanent seeding - will be initiated within 14 days of temporarily ceasing construction activity on a portion of the site or immediately initiated where construction activities have permanently ceased.
- ☒ Natural buffer zone – (Will be established along waterbodies with at least 25 feet for any unnamed streams, creeks, rivers, lakes, or other waterbodies and at least 50 feet for an established TMDL waterbody, streams listed on the 303d list, an ERW, ESW, NSW, and any others at the discretion of the Director of DEQ.
- If encroachment is necessary within these required buffer zones, briefly describe the reason why.)
- When encroachment occurs, additional measures will be taken to protect the waterbody, and the contractor will be required to stabilize the disturbed area within the buffer zone within 5 business days of completion of work.
- ☒ Slope Tracking -
- Other -

*Stabilized exits will use either suitable sized rock as directed by the Engineer or manufactured devices designed to minimize the amount of soil being tracked off-site.

3. Structural Practices: (Permit Pg. 7 of Part II)

ARKANSAS DEPARTMENT OF TRANSPORTATION

JOB NO. 110716

STORM WATER POLLUTION PREVENTION PLAN

List of Structural Practices to be utilized and scheduling of implementation for that practice:

- ☒ Sediment basins* (to be utilized whenever 10 or more acres drain from common drainage locations on the site based upon 3600 cubic feet per acre or sized based on the runoff volume of a 10 year, 24 hours storm, unless not attainable. If not attainable, briefly describe reason(s) that a basin was not used) _____
- _____ Curb & gutter - _____
- ☒ Ditch checks** - As indicated by the plans _____
- _____ Diversion ditches - _____
- _____ Drainage swales - _____
- _____ Drop inlet silt fences - _____
- _____ Erosion Control Matting - _____
- _____ Gabions - _____
- ☒ Inlet & outlet protection - As indicated by the plans _____
- ☒ Silt fences - As indicated by the plans _____
- _____ Slope drains - _____
- _____ Storm sewer - _____
- _____ Retaining walls - _____
- _____ Temporary Silt Dikes - _____
- _____ Wattles/Sediment Logs - _____
- _____ Filter Socks - _____
- _____ Other - Solid Sodding _____

*Sediment will be removed from basins when design capacity is reduced by 50%. In addition, when a sediment basin is utilized per permit requirements, the procedures for the removal of a sediment basin can be found in the Standard Specifications Subsection 621.03.

**Hay/Straw bales will not be used in areas of concentrated flow.

J. Other Controls: In addition to erosion control and storm water management, our plan will include measures to properly manage solid wastes, hazardous wastes, dust generation, and all other activities that will generate wastes during the construction phase. (Permit Pg. 8 of Part II)

ARKANSAS DEPARTMENT OF TRANSPORTATION

JOB NO. 110716

STORM WATER POLLUTION PREVENTION PLAN

1) Solid material control, debris, and wastes:

All solid materials discharged to waters of the United States shall be in accordance with Section 110 of the Standard Specifications, the applicable Section 404 Special Provisions in the Job Contract, the plans, and as authorized by a USA Corps of Engineers Section 404 Permit. Litter and construction debris will be prevented from becoming a pollutant source for storm water discharges. Any debris which inadvertently enters a water of the state will be removed daily.

2) Offsite vehicle tracking:

Each vehicle exit from the construction site must either be stabilized or use wheel washing to prevent the tracking of material onto the public roadway. (If sediment escapes the construction site through tracking, it will be removed by sweeping frequently enough to minimize off-site impacts to waterbodies.)

3) Temporary sanitary facilities:

Facilities will be provided and properly maintained by the Contractor in accordance with Subsection 107.06 of the Standard Specifications.

4) Concrete waste area:

Designated concrete washout waste area(s) will be established and utilized to prevent liquid concrete waste from being discharged to a water of the state.

5) Fuel storage, hazardous materials, and truck washing areas:

The following is a list of materials which could be potential sources of pollution in storm water runoff: asphalt materials, concrete, cement, concrete wash water, paint, solvents, petroleum products, fertilizers, concrete curing compound, lime, linseed oil, asphalt additives, concrete additives, and sewage. Handling of the above materials or other potential pollutants shall be in accordance with Subsection 110.06, Pollutants, of the Standard Specifications.

K. Non-Storm Water Discharges: (Permit Pg. 12 of Part I)

List of Anticipated Allowable Non-Storm Water Discharges*:

- 1) Water used to wash vehicles (where detergents or other chemicals are not used) or control dust in accordance with Part II.A.4.J.2
- 2) Uncontaminated landscape Irrigation
- 3) Uncontaminated pavement wash waters where spills or leaks of toxic or hazardous material have not occurred (unless all spilled material have been removed) and where detergents or other chemicals are not used.
- 4) Uncontaminated springs, excavation dewatering, and groundwater (Part I.B.13.C). If dewatering is necessary and turbidity exists, the discharge will be managed with appropriate devices such as a sediment bag or basin prior to discharge.

ARKANSAS DEPARTMENT OF TRANSPORTATION

JOB NO. 110716

STORM WATER POLLUTION PREVENTION PLAN

*Other Allowable Non-Storm Water Discharges are listed in the Permit Part I.B.10, but there is no reasonable anticipation of these discharges at this time.

L. Post-Construction Storm Water Management: (Permit Pg. 8 of Part II)

Permanent Storm Water Management - List of devices to be utilized for storm water infiltration and management:

☒	Channel linings	☐	Concrete ditch paving
☐	Culverts	☐	Curb and gutter
☐	Detention basins	☐	Drop inlets
☒	Dumped riprap	☒	Floodgates
☐	Gabions	☐	Grassed swale
☒	Inlet & outlet protection	☒	Permanent seeding
☐	Retention pond	☐	Riprap
☒	Solid sodding	☐	Storm sewer
☐	Topsoil replacement	☒	Underdrains
☐	Velocity dissipators	☐	Wetland creation
☐	Other-list <u>Stone Backfill</u>		

Velocity dissipation devices:

☐	Concrete spillways	☐	Grouted riprap
☒	Permanent seeding & mulch	☒	Underdrains
☒	Solid sodding	☐	Concrete ditch paving
☐	Dumped riprap	☐	Detention basins
☐	Velocity dissipators	☐	Wetland infiltration
☐	Other-list _____		

M. State or Local Programs: (Permit Pg. 8 of Part II)

The Arkansas State Highway Commission and the Arkansas Department of Transportation have the exclusive authority over the state highway system (See Ark. Code Ann. § 27-67-101, et al), therefore no local agencies would have authority or jurisdiction over the lands owned, controlled, and maintained by the ARDOT. The ARDOT will make every effort to address any concerns of local entities concerning storm water discharges from the state highway right of way.

This authority does not extend to the Contractor's off-site operations. The Contractor is responsible for complying with all State and Local Programs in accordance with Subsection 107.01 of the Standard Specifications.

ARKANSAS DEPARTMENT OF TRANSPORTATION

JOB NO. 110716

STORM WATER POLLUTION PREVENTION PLAN

N. Inspections: (Permit Pg. 8-9 of Part II)

Inspections will be conducted by a qualified inspector at the following frequency:

 X **Every 7 days or**
 Every 14 Days and within 24 hours after a ¼ inch or greater rainfall event.

A report of the inspection will summarize the scope of the inspection, the name of the inspector, the date of inspection, and any damages observed and repairs made to any control measure. Completed inspection forms will be kept with the SWPPP.

The following are the minimum inspection, maintenance, and reporting practices that will be used to maintain erosion and sediment controls at the construction site:

1. Inspection form (Attachment B).
2. All erosion and sediment control measures will be maintained in good working order. If repair is necessary, it will be completed **within three (3) business days of discovery**.
3. All controls will be inspected to ensure that they meet the manufacturer's specifications.
4. Controls will be replaced or modified if periodic inspections reveal the device is not performing as intended.
5. Approximate times of beginning and duration of storm events.
6. Sediment basins and sediment traps will be cleaned out when they reach 50% of the original capacity.
7. A description of any discharges during inspections.
8. Inspections are not required if snow cover exists over the entire site for an extended period of time. If there is any runoff from the site at any time during snow cover, melting conditions would be considered to be existent at the site then inspections would need to be resumed.
9. All site entrances and exits will be checked to ensure no off-site tracking.
10. All components of the SWPPP and inspection reports will be maintained for a minimum of 3 years after permit termination.
11. In addition to inspection, records will be kept of the following:
 - a. Dates when major grading activities occur,
 - b. Dates when construction activities cease in an area, temporarily or permanently,
 - c. Dates when an area is stabilized, temporarily or permanently.

O. Maintenance: All erosion and sediment control measures will be maintained in good working order. If a repair is necessary, it will be completed **within three (3) business days of discovery**. (Permit Pg. 10 of Part II)

However, if conditions do not permit large equipment to be used, a longer time frame is allowed if the condition is thoroughly documented on the inspection form as stated in the Permit Part II.A.4.O.

P. Adverse Weather Conditions: Adverse conditions are those that are dangerous or create inaccessibility for personnel, such as local flooding, high winds, or electrical storms, or situations that otherwise make inspections impractical, such as extended frozen conditions.

ARKANSAS DEPARTMENT OF TRANSPORTATION

JOB NO. 110716

STORM WATER POLLUTION PREVENTION PLAN

When adverse weather conditions prevent the inspection of the site, an inspection should be completed as soon as safe and feasible. If adverse weather conditions prevent compliance with the permit, documentation of the beginning and ending date of adverse weather condition should be included. **This information will be documented in the Site Manager Program job records.**

Q. Endangered Species: Endangered species clearance is obtained during the National Environmental Policy Act (NEPA) process for all ARDOT projects and is conducted in accordance with Section 7 of the Endangered Species Act. Further information about this process can be obtained by contacting the ARDOT Environmental Division at (501) 569-2595, or the U.S. Fish and Wildlife Service at (501) 513-4489.

R. Employee Training: ARDOT employees who perform inspections have received formal training in NPDES Storm Water requirements and SWPPP implementation. Training records will be available electronically or will be maintained with the SWPPP after the project commences.

ARKANSAS DEPARTMENT OF TRANSPORTATION
JOB NO. 110716
STORM WATER POLLUTION PREVENTION PLAN

S. Contractors: (Permit Pg. 3 of Part II)

All contractors should be identified in the plan. (a page should be included for each subcontractor).

THE CERTIFICATION BELOW SHALL BE COMPLETED AND INCLUDED IN EACH SUBCONTRACT. Copies of these certifications must be inserted at this location.

The Contractor/Subcontractor indicated below shall have responsibility for implementation of the pay items as listed below.

Item	Item

All Contractors operating on the site shall have the responsibility for compliance with Section 110 of the Standard Specifications for their operations, including, but not limited to: Good housekeeping practices, spill prevention, spill reporting and clean-up, and product specific practices such as limiting the discharge of concrete waste water to areas specified in the SWPPP.

Contractor Printed
Name: _____

Signature: _____ Title: _____

Company Name: _____ Date: _____

Company
Address: _____

Telephone Number: _____ ARDOT Job: _____

[illegible]

ARKANSAS DEPARTMENT OF TRANSPORTATION

JOB NO. 110716

STORM WATER POLLUTION PREVENTION PLAN

U. Plan Certification: (Permit Pg. 10 of Part II) (To be completed by a duly authorized representative or the cognizant official.)

"I certify under penalty of law that this document and all attachments such as Inspection Form were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

Note: For this permit only, "this document" refers to the Storm Water Pollution Prevention Plan, "attachments" refers to the site map and inspection forms, and "system" is referencing the project site.

Printed Name: David Baker

Printed Title: Engineer of Roadway Design

Signature: _____

Date: _____

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

SUBMISSION OF ASPHALT CONCRETE HOT MIX ACCEPTANCE TEST RESULTS

Division 106 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The following is hereby added to **Subsection 106.04, Acceptance of Materials**:

All ACHM Contractor Acceptance Tests shall be signed by the technician and submitted electronically through Doc Express in pdf format, and a signed paper copy be given to the ARDOT plant inspector after the completion of each subplot.

The ACHM Microsoft Excel Spreadsheet for Contractors/Suppliers is the required form for documentation and can be downloaded from the following website:

<https://ardot.gov/divisions/construction/construction-information/for-use-on-feb-2024-letting-and-later-achm-spreadsheet/>

To download this file, follow the instructions on the page linked above. Use of this file requires Microsoft Excel.

Any questions or issues arising from the use of this file should be referred to the Resident Engineer.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SPECIAL PROVISION
JOB NO. 110716
VALUE ENGINEERING

Section 104 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The following is added as a new subsection:

104.08 Value Engineering Change Proposals (VECP).

(a) General. The Contractor may submit a Value Engineering Change Proposal at any time after execution of the Contract by the Department. Any VECP submitted before this date shall be deemed to have been submitted on the date the Contract was executed by the Department and the time allowed for consideration of the VECP shall begin on that date. Any cost savings generated to the Contract as a result of a VECP submitted by the Contractor and approved by the Department shall be shared equally between the Contractor and the Department.

The Contractor may submit a VECP for an approved subcontractor. Subcontractors may not submit a VECP except through the Contractor.

Bid prices shall not be based on the anticipated approval of a VECP. If a VECP is rejected, the Contract shall be completed at the Contract bid prices.

If the Department determines that the time for response indicated in the submittal is insufficient for review, the Contractor will be promptly notified. Based on the additional time needed by the Department for review and the effect on the Contractor's schedule occasioned by the added time, the Department will evaluate the need for a time extension.

The Contractor shall have no claim against the Department for any delay to the Contract based on the failure to respond within the time indicated in the submittal if additional information is needed to complete the review.

VECPs contemplated are those that could produce a savings to the Department without impairing essential functions and characteristics of the facility; including but not limited to, service life, economy of operation, ease of maintenance, desired appearance, and safety.

The Contractor may submit for review a "VECP Concept" provided that it contains enough information to clearly define the work involved and the benefits to be realized. Written notification by the Department that the review has been completed and that the "VECP Concept" appears to be favorable merely indicates that the engineering and plan development may continue for submittal of the VE Change Proposal and is not authorization for any construction work to begin. Should the final design not reflect the expected benefits, the Department may reject the "VECP Concept" and the VE Change Proposal without recourse by the Contractor.

(b) Submittal of Proposal. The following materials and information shall be submitted with each proposal:

1. A statement that the proposal is submitted as a VECP.
2. A description of the difference between the existing Contract and the proposed change, and the cooperative advantages and disadvantages of each, including effects on service life, economy of operations, ease of maintenance, desired appearance, and safety.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SPECIAL PROVISION
JOB NO. 110716
VALUE ENGINEERING

3. A complete set of plans and specifications showing the proposed revisions relative to the original Contract features and requirements.
4. A complete analysis indicating the final estimate costs and quantities to be replaced by the Proposal compared to the new costs and quantities generated by the Proposal.
5. A statement specifying the date by which a Change Order adopting the Proposal must be executed to obtain the maximum cost reduction during the remainder of the Contract. This is the review time.
6. A statement detailing the effect the Proposal will have on the Contract time for completing the Contract.
7. A description of any previous use or testing of the Proposal and the conditions and results. If the Proposal was previously submitted on another Department project, indicate the date, Contract number, and the action taken by the Department.

(c) Conditions. VECPs will be considered only when all the following conditions are met:

1. VECPs, approved or not approved by the Department, apply only to the ongoing Contract(s) referenced in the Proposal and become the property of the Department. The Proposal(s) shall contain no restrictions imposed by the Contractor on their use or disclosure. The Department has the right to use, duplicate, and disclose in whole or in part any data necessary for the utilization of the Proposal. The Department retains the right to utilize any accepted Proposal or part thereof on other projects without obligation to the Contractor. This provision is not intended to deny rights provided by law with respect to patented materials or processes.
2. If the Department is already considering certain revisions to the Contract or has approved certain changes in the Contract for general use that are subsequently incorporated in a VECP, the Department will reject the Proposal and may proceed without obligation to the Contractor.
3. The Contractor shall have no claim against the Department for additional costs or delays resulting from the rejection of a VECP, including but not limited to, "VECP Concept" acceptance, engineering and development costs, loss of anticipated profits, increased material or labor costs.
4. The Department will determine if a Proposal qualifies for consideration and evaluation. It may reject any Proposal that requires excessive time or costs for review, evaluation, and/or investigations, or that is not consistent with the Department's design policies and criteria for the project.
5. The Engineer will reject all or any portion of work performed under an approved VECP if unsatisfactory results are obtained. The Engineer will direct the removal of such rejected work and require construction to proceed under the original Contract requirements without reimbursement for work performed under the proposal, or for its removal. Where modifications to the VECP, other than changes to the estimated quantities, are approved to adjust to field or other conditions, reimbursement will be limited to the total amount payable for the work at the Contract bid prices as if it were

ARKANSAS DEPARTMENT OF TRANSPORTATION
SPECIAL PROVISION
JOB NO. 110716
VALUE ENGINEERING

constructed under the original contract requirements. The rejection or limitation of reimbursement shall not constitute the basis of any claim against the Department for delay or for other costs.

6. The proposed work shall not contain experimental features but shall be proven features that have been used under similar or acceptable conditions on other projects or locations acceptable to the Department.

7. Proposals will not be considered if equivalent options are already provided in the Contract.

8. The savings generated by the Proposal must be sufficient to warrant a review and processing.

9. A Proposal changing the type and/or thickness of the pavement structure or revising quantities simply by adjusting grades will not be considered.

10. Additional information needed to evaluate Proposals, shall be provided in a timely manner. Untimely submittals of additional information will result in rejection of the Proposal. Where design changes are proposed, the additional information could include results of field investigations and surveys, design computations, and field change sheets. The review time shall be extended by the number of days between the request by the Department for additional information and the delivery of such additional information.

(d) Payment. If the VECP is accepted, the changes and payment will be authorized by Change Order.

Reimbursement will be made as follows:

1. The changes will be incorporated into the Contract by changes in quantities or unit prices of existing pay items, by the addition of new pay items, or any combination of these methods, as appropriate. Existing pay items are the original Contract pay items and any pay items that have been added to the Contract by Supplemental Agreement on or before the date the VECP is submitted.

2. The cost of the revised work as determined from the changes will be paid as specified in the Change Order. In addition, the Department will pay the Contractor 50 percent of the actual savings to the Department as reflected by the difference between the cost of the revised work and the cost of the related construction required by the original Contract computed at Contract bid prices. This payment will be made upon satisfactory completion of all work under the VECP.

3. Costs for "VECP Concept" acceptance, engineering and development, design, and implementation associated with the VECP are not eligible for reimbursement.

4. Payments as designated above will be made to the Contractor. If the VECP was originated by a subcontractor, the Contractor shall be responsible for any and all payments to the subcontractor arising from the approval of the VECP.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

WARM MIX ASPHALT

DESCRIPTION: The Department will allow the use of Warm Mix Asphalt (WMA). All provisions for the production and placement of conventional HMA mixtures as stipulated in Section 410 Construction Requirements and Acceptance of Asphalt Concrete Plant Mix Courses of the Standard Specifications for Highway Construction, Edition 2014, are applicable except as noted below.

Section 410 Construction Requirements and Acceptance of Asphalt Concrete Plant Mix Courses of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

Section 410.03: Replace the third sentence with "WMA production temperatures at the plant shall be according to the Contractor's approved mix design but may be adjusted based on recommendations of the WMA additive/process manufacturer."

Add the following paragraph: "Implementation of best management practices in the control of aggregate moisture content prior to introduction to the drying or mixing drum is highly recommended in order to achieve the maximum benefit of WMA technology."

Section 410.07: Replace the last sentence of the first paragraph with "Spreading and finishing temperatures shall be according to the Contractor's approved mix design, but in no case shall the WMA be placed at a temperature less than 220° F."

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 110716

WELLHEAD PROTECTION

Section 106.02 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The following is added to **Section 106.02**:

Public drinking water well(s) are located in the vicinity of this project. Each well has a wellhead protection area delineated. The wellhead protection area identifies the area around the well in which Restraining Conditions as specified in Section 107.10 apply to protect drinking water quality. The Contractor shall, in all operations including materials excavation, make provision to minimize the potential impact to the local public drinking water sources resulting from work performed on this project.

Required actions of the Contractor shall include, but are not limited to, the following:


- 1) Excavations for borrow areas, material pits, or quarry sites shall not extend below ten (10) feet from normal ground surface within all wellhead protection areas shown on page 2.
- 2) No waste materials shall be disposed of in the borrow areas, material pits, or quarry sites within wellhead protection areas.

In the event that damage occurs to local public drinking water sources which is the result of the Contractor's actions or negligence, compensation shall be provided by the Contractor at no cost to the State.

The Contractor may request a variance from this special provision by submittal in accordance with 107.10(c)(2). The Contractor will not be granted additional compensation or contract time due to requested modifications of this special provision.

METHOD OF MEASUREMENT AND BASIS OF PAYMENT: The work involved in complying with this Special Provision will not be measured or paid for separately, but will be considered included in the contract unit prices bid for other items of the contract.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SPECIAL PROVISION
JOB NO. 110716
WELLHEAD PROTECTION

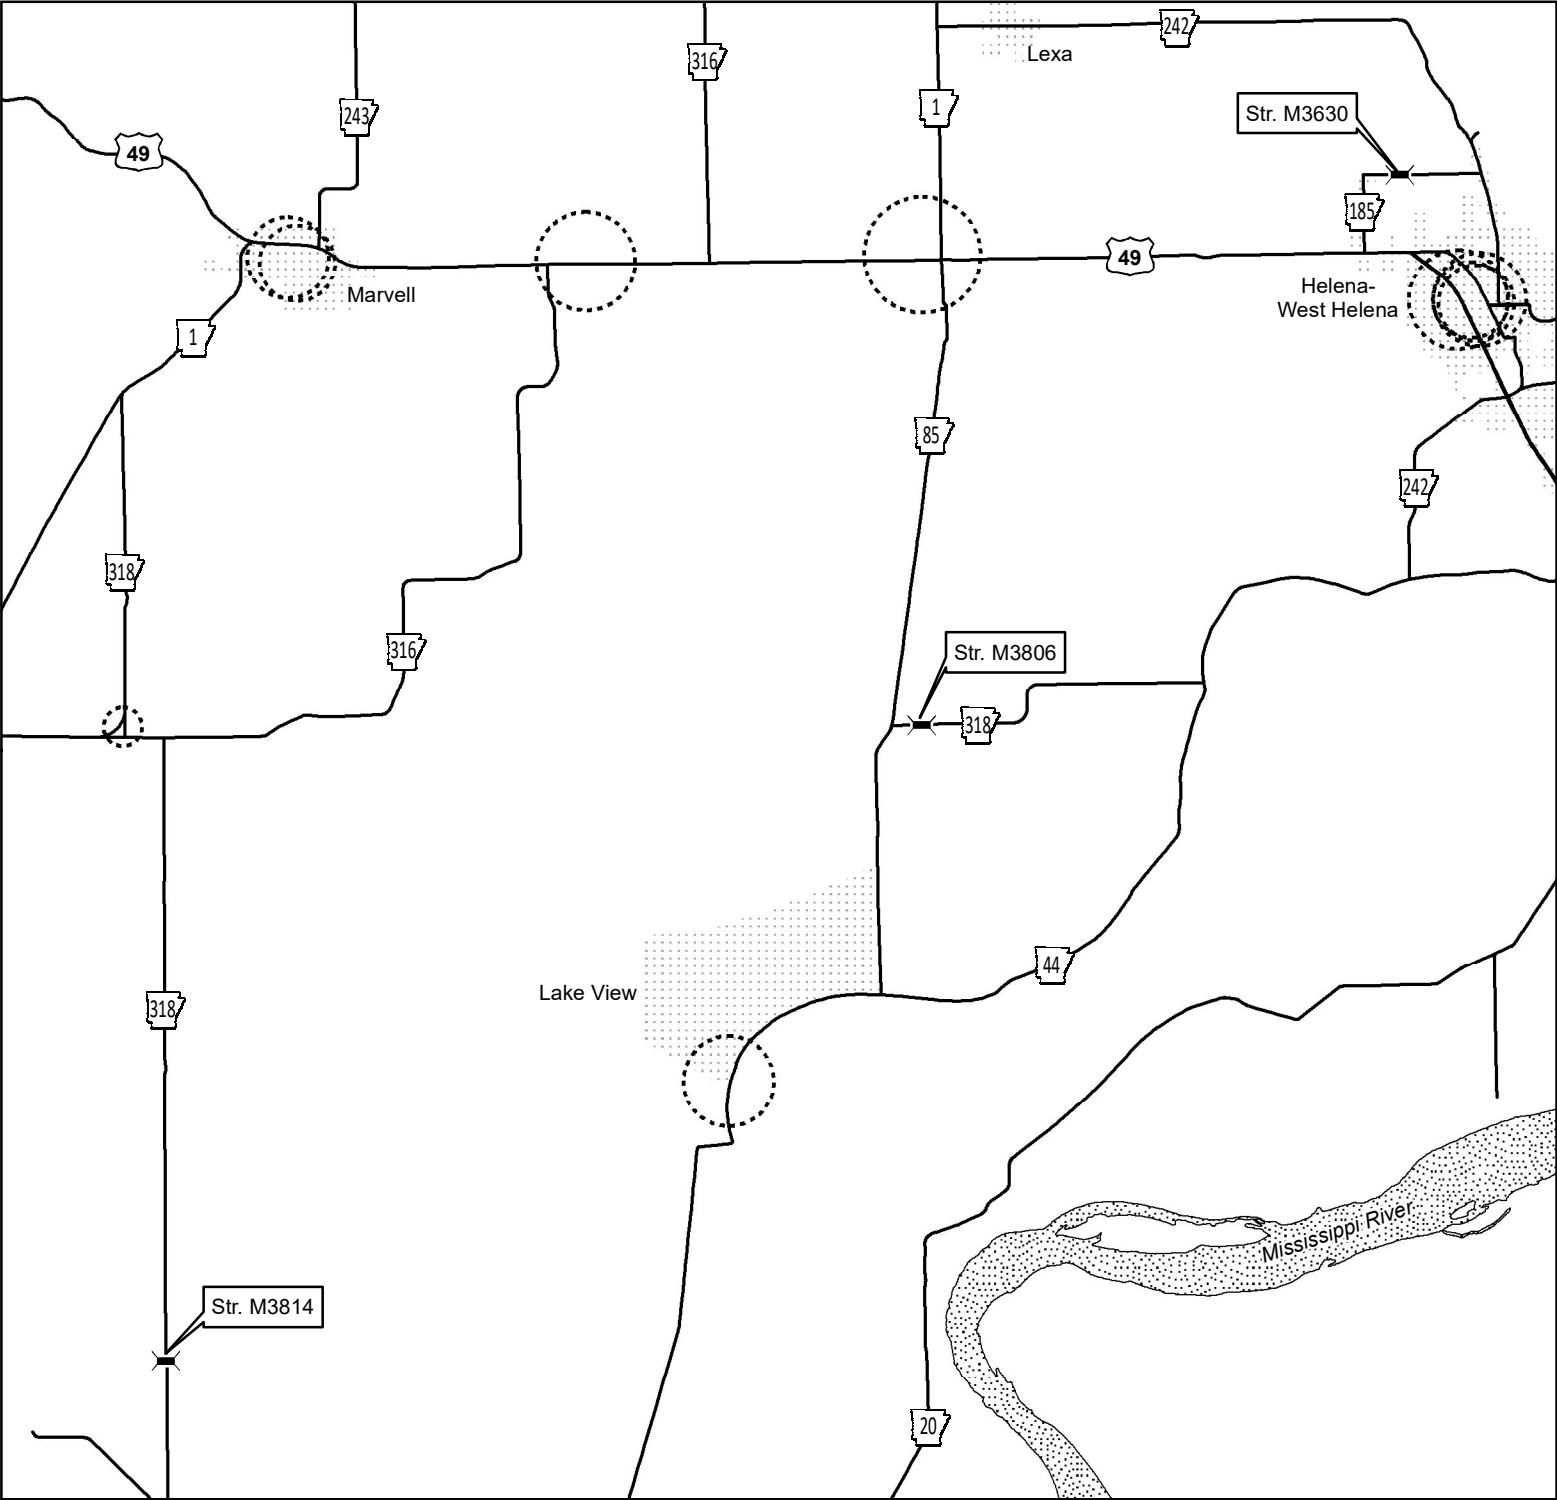

0 1.25 2.5
Miles

	Project Location
	Wellhead Protection Area