

ADDENDUM NO. 1 – JOB 020853

ARKANSAS DEPARTMENT OF TRANSPORTATION

PROGRAM MANAGEMENT DIVISION

LITTLE ROCK, ARKANSAS

June 3, 2026

TO: Eligible Bidders – Job 020853

SUBJECT: Proposal Document Changes

The Title Plan Sheet map has been revised to reflect Desha County. Lettersize Plan Sheets 1 and 9 have been revised to reflect this change. You should substitute the revised sheets into your proposal documents.

ACKNOWLEDGEMENT OF THIS ADDENDUM SHALL BE MADE BY SIGNING BELOW AND SUBMITTING THIS SIGNED FORM TO THE PROGRAM MANAGEMENT DIVISION BY EMAIL AT pmd@ardot.gov OR BY FAX AT (501)569-2623.

Sincerely,



For Daniel Siskowski
Division Engineer
Program Management

Name

Company

DATE REVISED	DATE REVISION	DISTRICT	STATE	JOB NO.	SHEET	TOTAL SHEETS
01-2020		6	ARK.	020853	1	9
YANCOPIN RD. SURFACING (DESHA CO.) (S)						

ARKANSAS DEPARTMENT OF TRANSPORTATION
CONSTRUCTION PLANS FOR STATE HIGHWAY


**YANCOPIN RD. SURFACING
(DESHA CO.) (S)**

DESHA COUNTY

CO. RD. 41

JOB 020853

FED. AID PROJ. 9990

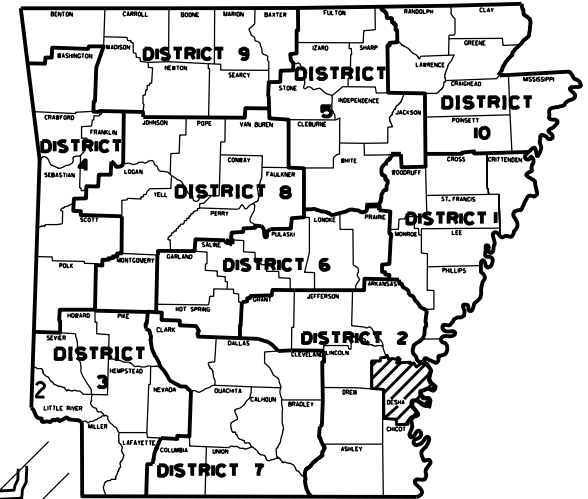


R2W

WILDLIFE

R1W

NOT TO SCALE

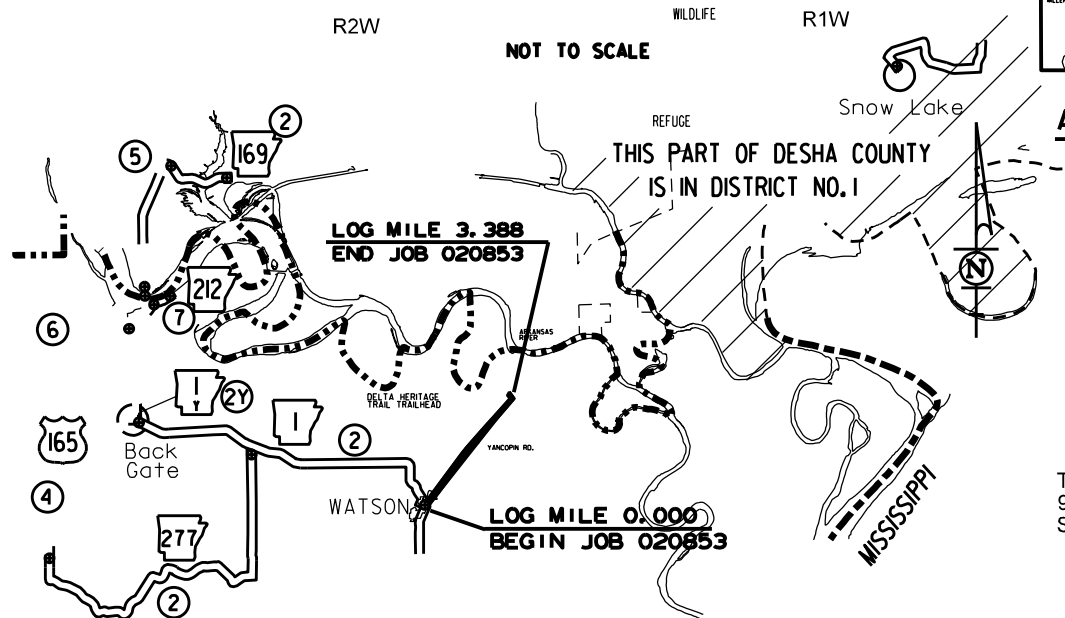

ARK. HWY. DIST. NO. 2

APPROVED



Digitally signed by Hoggard, Andrew W.
DN: cn=Hoggard, Andrew W., o=ArkDOT, ou=ArkDOT, email=ahoggard@arkdot.gov, c=US

DISTRICT ENGINEER

MID POINT OF PROJECT
LATITUDE = N 33° 55' 13"
LONGITUDE = W 91° 14' 08"

	GROSS LENGTH OF PROJECT	17888.64	FEET	OR	3.388	MILES
NET	ROADWAY	17888.64			3.388	
NET	BRIDGES	0.00			0.000	
NET	PROJECT	17888.64			3.388	

SUMMARY OF QUANTITIES

ITEM NUMBER	ITEM	QUANTITY	UNIT
201	CLEARING	1	STATION
201	GRUBBING	1	STATION
202	REMOVAL AND DISPOSAL OF PIPE CULVERTS	1	EACH
SP & 213	SHAPING ROADWAY SECTION	181	STATION
SP, SS, & 303	AGGREGATE BASE COURSE (CLASS 7)	15438	TON
SS & 401	TACK COAT	45	GAL.
SP, SS, & 407	MINERAL AGGREGATE IN ACHM SURFACE COURSE (1/2")	4252	TON
SP, SS, & 407	ASPHALT BINDER (PG 64-22) IN ACHM SURFACE COURSE (1/2")	267	TON
601	MOBILIZATION	1.00	LUMP SUM
SS & 603	MAINTENANCE OF TRAFFIC	1.00	LUMP SUM
SS & 604	SIGNS	339	SQ. FT.
604	CONSTRUCTION PAVEMENT MARKINGS	35904	LIN. FT.
SS & 606	18" REINFORCED CONCRETE PIPE CULVERTS (CLASS III)	36	LIN. FT.
SS & 606	18" FLARED END SECTIONS FOR REINFORCED CONCRETE PIPE CULVERTS	2	EACH
SS & 606	SELECTED PIPE BEDDING	30	CU. YD.
SS & 606	SELECTED PIPE BACKFILL	10	CU. YD.
620	LIME	6	TON
620	SEEDING	3.00	ACRE
SS & 620	MULCH COVER	6.00	ACRE
620	WATER	367.3	M. GAL.
621	TEMPORARY SEEDING	3.00	ACRE
621	SAND BAG DITCH CHECKS	800	BAG
623	SECOND SEEDING APPLICATION	3.00	ACRE
624	SOLID SODDING	10	SQ. YD.
SP & 635	ROADWAY CONSTRUCTION CONTROL	1.00	LUMP SUM
718	REFLECTORIZED PAINT PAVEMENT MARKING WHITE (4")	35904	LIN. FT.
718	REFLECTORIZED PAINT PAVEMENT MARKING YELLOW (4")	35904	LIN. FT.
SS & 726	STANDARD SIGN	29	SQ. FT.
SS & 729	CHANNEL POST SIGN SUPPORT (TYPE C)	9	EACH

REVISIONS

DATE	REVISION	SHEET NUMBER
6/1/2026	REVISED COUNTY HATCHING ON DISTRICT MAP	1 & 9