



Note:  
For details of Elastomeric Bearings,  
see Dwg. No. 47100

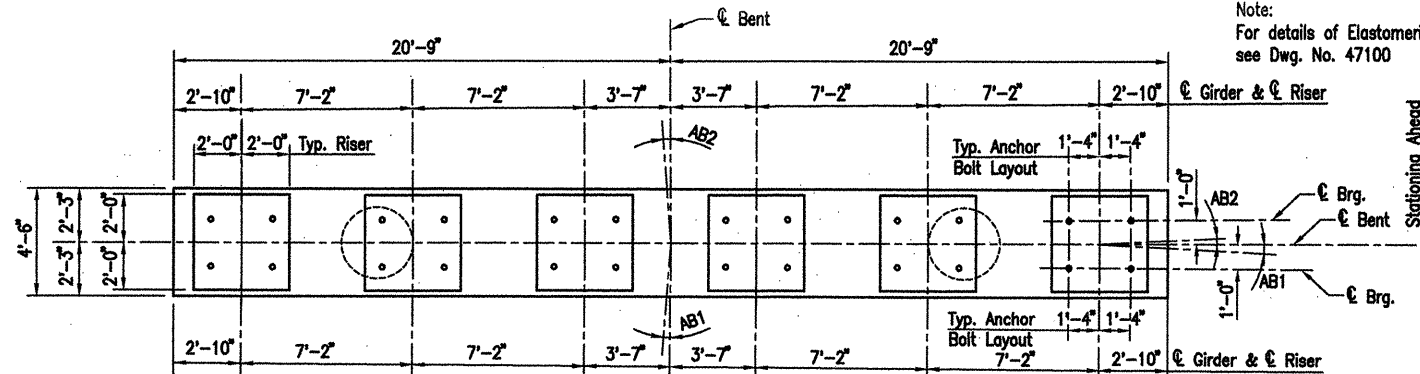

PLAN

Scale: 1/4" = 1'-0"

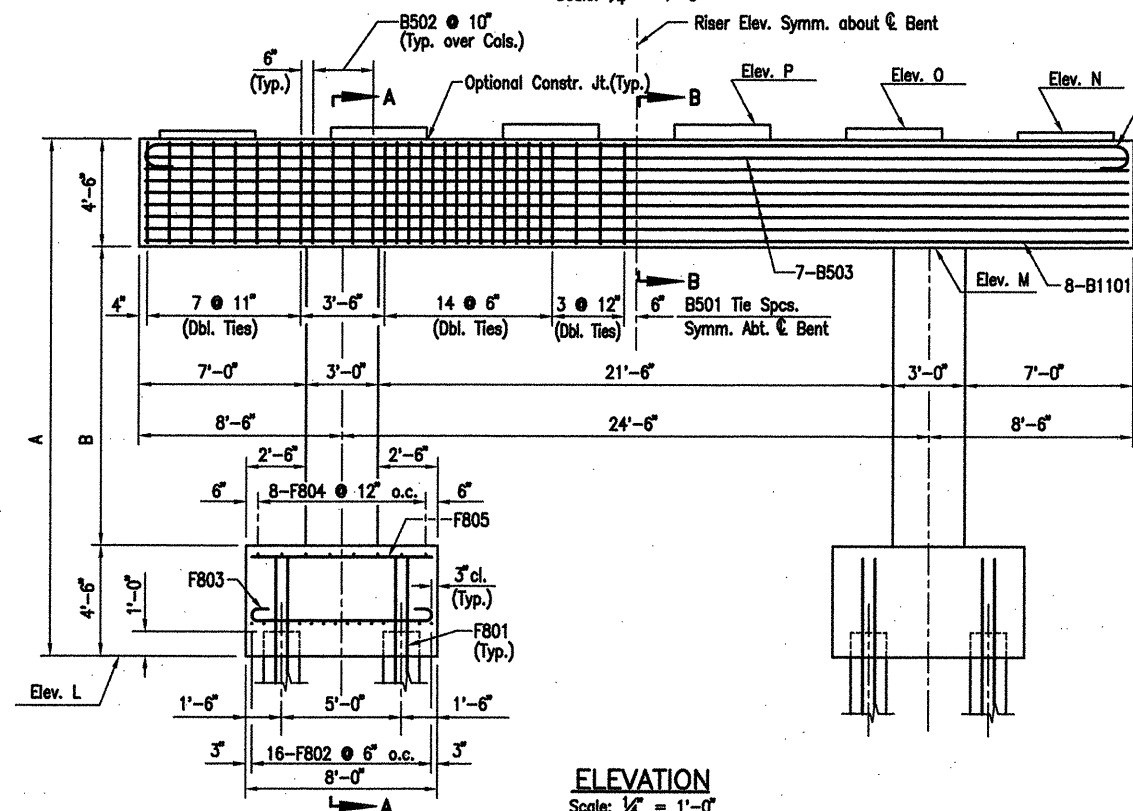

ELEVATION


Scale: 1/4" = 1'-0"  
Looking Forward

TABLE OF VARIABLES

Variable	Bent No.																		
	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	
AB1	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	1' 8.25"
AB2	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	11' 33"	6' 6.70" 0' 0.00"

TABLE OF VARIABLES

Variable	Bent No.	Variable	Bent No.
	2, 13 to 19		3 to 12
A	23'-0"	A	24'-0"
B	14'-0"	B	15'-0"
C	22'-8"	C	23'-8"
D	21'-2"	D	22'-2"
E	8'-0"	E	7'-0"
F	59	F	62
G	497'-0"	G	520'-11"
Elev. L	154.43	Elev. L	153.43
Elev. M	172.93	Elev. M	172.93
Elev. N	177.77	Elev. N	177.77
Elev. O	177.91	Elev. O	177.91
Elev. P	178.05	Elev. P	178.05




SECTION E-E

N.T.S.


Drill and grout F801 dowels 3'-0" into piles using an approved non-shrink grout or an epoxy grout listed on the QPL. Diameter of holes and installation procedure shall be as recommended by the grout manufacturer.

\* - No lap splice of C501/C502 permitted in this length.

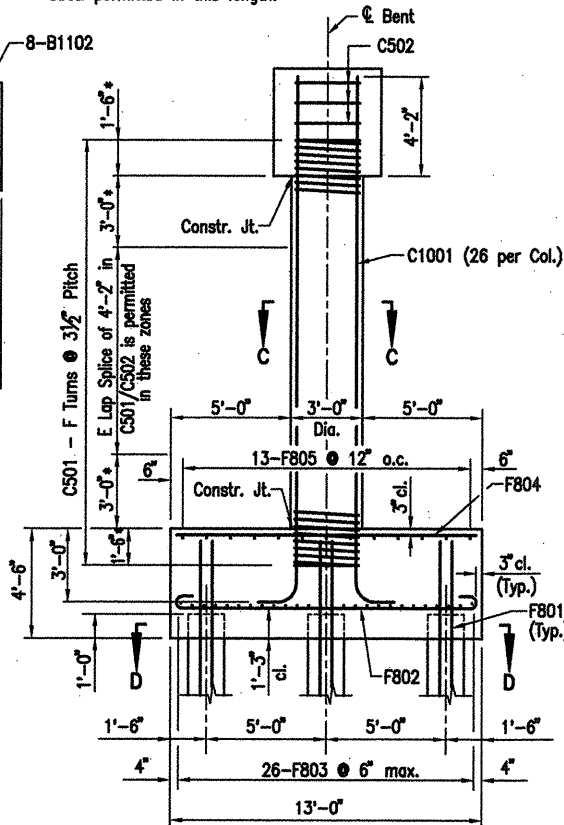

SECTION A-A


Scale: 1/4" = 1'-0"

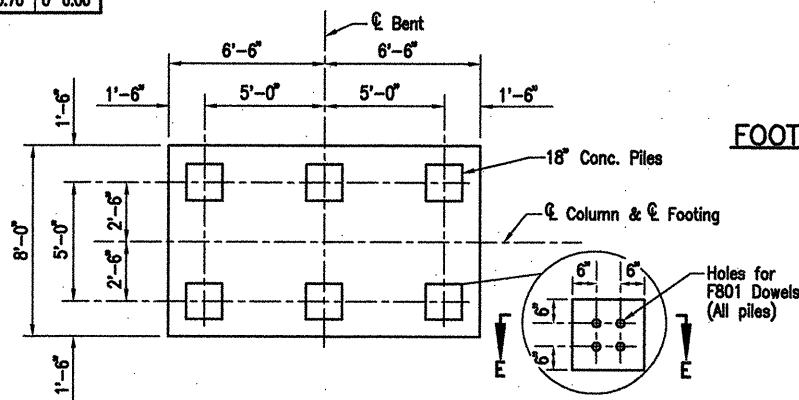

SECTION D-D


Scale: 1/4" = 1'-0"

The riser reinforcing steel shall be placed with the bent cap reinforcing steel. The Contractor has the option to drill and grout the riser reinforcing steel at least 1'-6" into the cap using an approved non-shrink grout or an epoxy grout listed in the QPL. Diameter of holes and installation procedure shall be as recommended by the grout manufacturer. Place bent reinforcing properly to avoid damage. This work shall be paid under "Reinforcing Steel - Bridge".

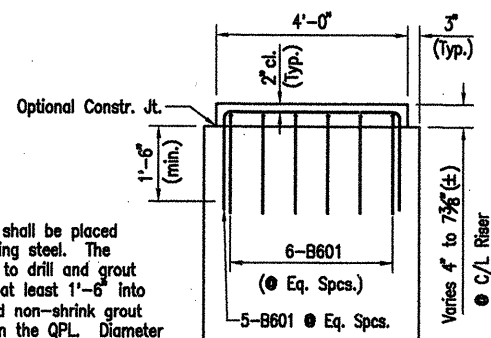


RISER DETAIL

Scale: 1/2" = 1'-0"

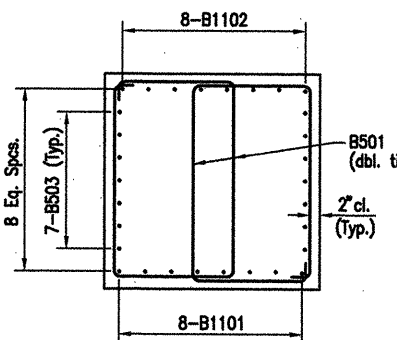


SECTION B-B

Scale: 1/2" = 1'-0"




SECTION C-C

Scale: 1/2" = 1'-0"

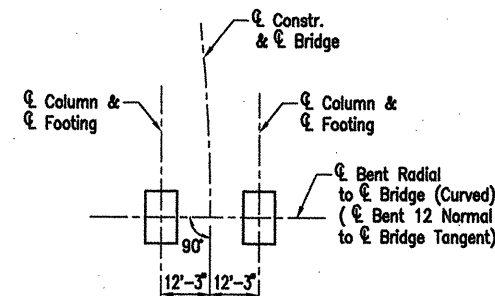

FOOTING LOCATION SKETCH

Looking Upstation  
N.T.S.

BRIDGE ENGINEER

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. ROAD NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
					ARK.			
				JOB NO.		110395	34	203
				06830	BENTS			47032

BAR LIST-PER BENT

Mark	No. Req'd	Length	'A'	'B'	P.D.	Bending Diagrams
B501	104	14'-0"	2'-7"	4'-2"	2 1/2"	Dimensions are out to out of bars. B501, B502, B601 C1001, F803, F802, B1102
B502	8	12'-3 1/2"	4'-2"	4'-2"	2 1/2"	
B503	14	41'-2"			Str.	
B601	66	7'-4"	3'-8"	2'-0"	4 1/2"	
B1101	8	41'-2"			Str.	
B1102	8	44'-2"	41'-2"	1'-0 1/2"	11 1/4"	
C501	2	G				* - 135° hook around vertical steel 3 3/4" p.d. - * C501, C502
C502	6	9'-6"				
C1001	52	C	D	1'-10"	9"	
F801	48	6'-0"			Str.	
F802	32	14'-4"	12'-6"	8"	6"	
F803	52	9'-4"	7'-6"	8"	6"	* - 135° hook around vertical steel 3 3/4" p.d. - * C501, C502
F804	16	12'-6"			Str.	
F805	26	7'-6"			Str.	

## NOTES:

- All concrete shall be Class "S". All exposed corners to be chamfered 3/4" unless otherwise noted. All concrete shall be poured in the dry.
- All reinforcing steel shall conform to AASHTO M31 or M53, Gr.60.
- If anchor bolts are drilled into cap, top reinforcing bars shall be properly placed to avoid damage.
- For additional information, see Layout.

## NOTES FOR SPIRAL REINFORCING

- Ends of spirals in footing and cap shall have 1 1/2 turns and terminate with a 135° hook and a 24" tail as shown in Bar List.
- Spiral reinforcement at splices of bars in the length designated as permissible for lap splices shall be terminated by a 135° hook with a 10" tail hooked around a vertical bar.
- Spiral reinforcement shall be plain round or deformed steel bars meeting the requirements of AASHTO M31 or M53 (Grade 60) or shall be cold drawn wire meeting the requirements of AASHTO M32 or M225 (Grade 70) with a minimum diameter of 0.625".
- Spiral reinforcement shall be paid for at the contract unit price bid per pound for "Reinforcing Steel - Bridge (Grade 60)". No additional payment shall be made for spacers, splices or bracing needed for assembly, shipping, handling or erecting.
- Lapped splices in spirals shall be lapped 80 bar diameters minimum.
- Adjust spiral pitch as needed to accommodate footing or cap bars.

## ALTERNATE NO. 1

DETAILS OF BENTS - WHITE RIVER  
BENTS 2 - 19WHITE RIVER STR. & APPRS.  
(CLARENDON) (PH III) (F)  
MONROE COUNTY

ROUTE 79 SEC. 13

ARKANSAS STATE HIGHWAY COMMISSION  
LITTLE ROCK, ARK.

Engstrom &amp; Modjeski and Masters, Inc.

DRAWN BY: CJA/JDB DATE: Sep. 10 FILENAME: b1103951\_b01  
CHECKED BY: FS DATE: Nov. 01 SCALE: 1/4" = 1'-0"  
DESIGNED BY: BMH DATE: Nov. 01  
BRIDGE NO. 06830 DRAWING NO. 47032