



FISCAL YEAR	JOB NO	SHEET TOTAL
1930	982	17 27
FED. AID	SCALE	FEET
0	1" = 20'	1" = 20'
ARK.	2620	17 27

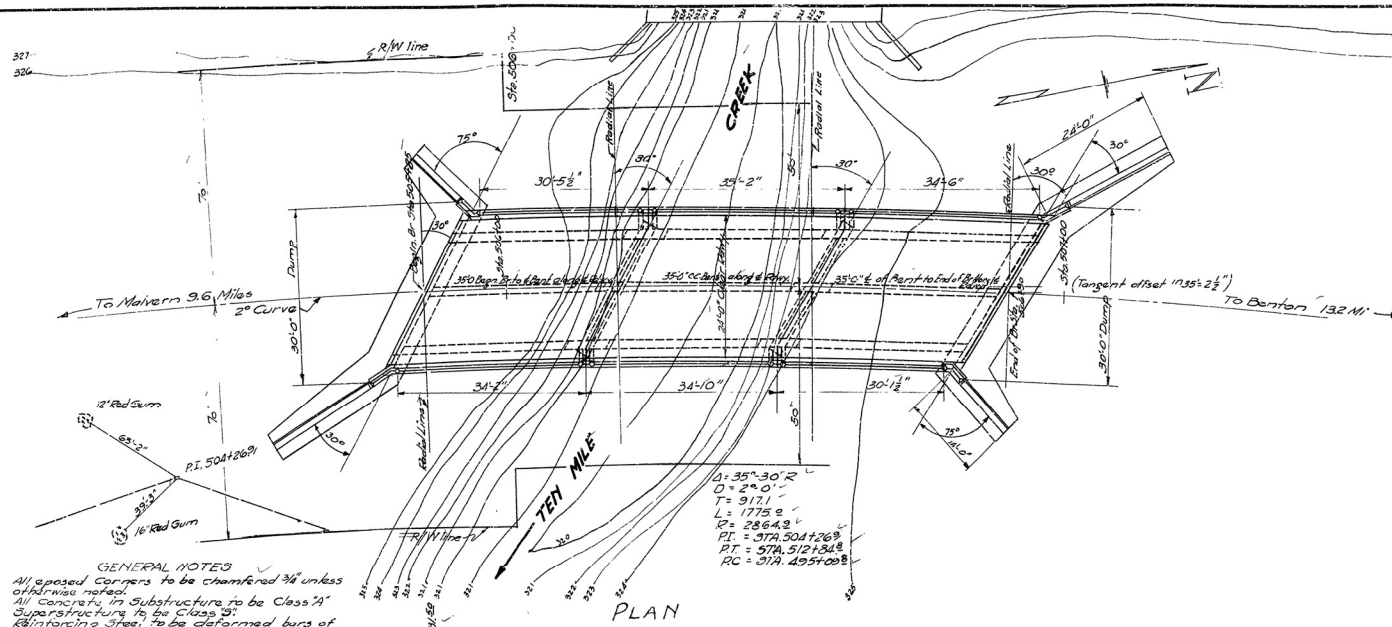

**GENERAL NOTES**  
 All exposed corners to be chamfered 3/4" unless otherwise noted.  
 All concrete in Substructure to be Class "A" Superstructure to be Class "B".  
 Reinforcing steel to be deformed bars of Structural or Intermediate grade.  
 Shop List and Bidding Diagrams to be submitted by the Contractor before final contract is approved.  
 Concrete in Superstructure to be poured in place.  
 For Details of Handrail See Div. 10, Sec. 200.  
 For Details of Superstructure See Div. 10, Sec. 200.  
 This Bridge No. 1436 is Superintended by the State Highway Commission.  
 It is on a 24' curve. Established grade is at inside gutter.  
 Specifications for Bridge are as per Standard Road and Bridge Specifications adopted May 30, 1925 and revised.

# **QUANTITIES:**

Item No.	Description	Quantity	Unit
12	Common Excavation	415	Cu. Yds.
13	Dry Excavation	500	"
14	Wet	392	"
15	Rock	38	"
54	Class "A" Concrete	156.21	"
55	Class "B" Concrete	125.85	"
56	Reinforcing Steel	45,000	Lbs.
74	Concrete Paving	215.10	"

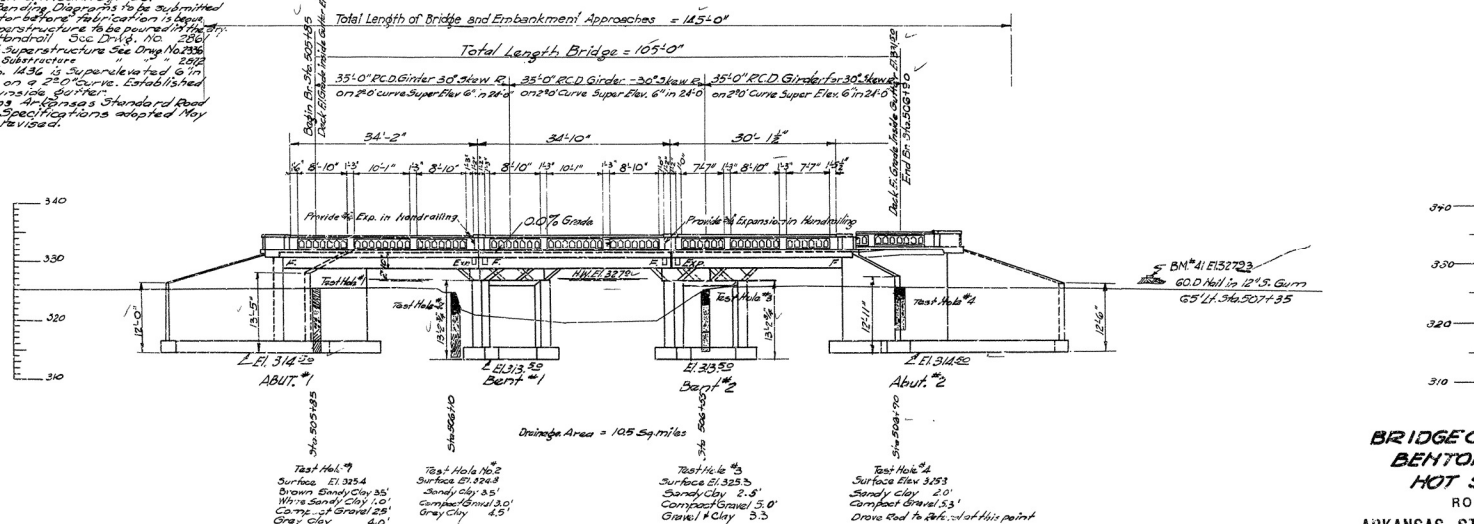

BRIDGE No. 1436

## **LAYOUT BRIDGE OVER TEN MILE CREEK BENTON-MALVERN ROAD HOT SPRING COUNTY**

ROUTE 67 SEC. 8

ARKANSAS STATE HIGHWAY COMMISSION  
 LITTLE ROCK, ARK.

Drawn By: B.E. Date: 8-1-30  
 Traced By: J.E. Date: 8-1-30  
 Checked By: J.E. Date: 1-23-32  
 Bridge No. 1436 DRAWING No. 2871

N.B. BROWN  
 BRIDGE ENGINEER

