

R/R CENTER SILL @ FULL DEPTH SECTION:

FW= 30" FT= 3/4"
WH= 21" WT= 7/16"
WC= 19 1/8" OFW= 5"


R/R CENTER SILL @ REDUCE SECTION:

FW= Not Visible FT=
WH= Visible WT=
WC= OFW=

BOLSTER SECTION:

FW= Not Visible FT=
WH= Visible WT=
WC= OFW=

** NOTE: (WH) IS THE AVERAGE HIEGHT OF BOLSTERS.

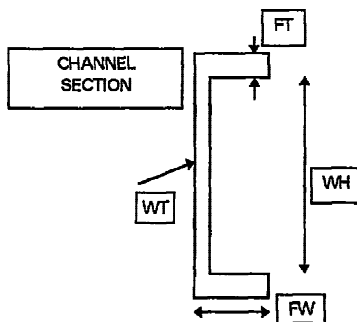

FLOOR BEAMS:

WH= WT=
FW= FT=

CROSS TIES:


WH= 5 3/4" WT= 1/4"
FW= 2 1/2" FT= 5/16"

STRINGERS:

WH= WT=
FW= FT=

SIDE SILLS:

WH= WT=
FW= FT=



FLOOR BEAM KICKERS: 1/4"

LH= LW= FT=

STRINGERS:

LH= 2 3/4" LW= 2 3/4" FT= 1/4"

INSP BY RLW:GFS

DATE 10-22-97

DIST 02 CO DI HAK RTE 1 SEC 0016 LM 9.55 STR # 21891

119726