


DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		100985	1	59
(2) HWYS. 135 & 139 STRS. & APPRS. (CARAWAY) (S)								

ARKANSAS DEPARTMENT OF TRANSPORTATION
CONSTRUCTION PLANS

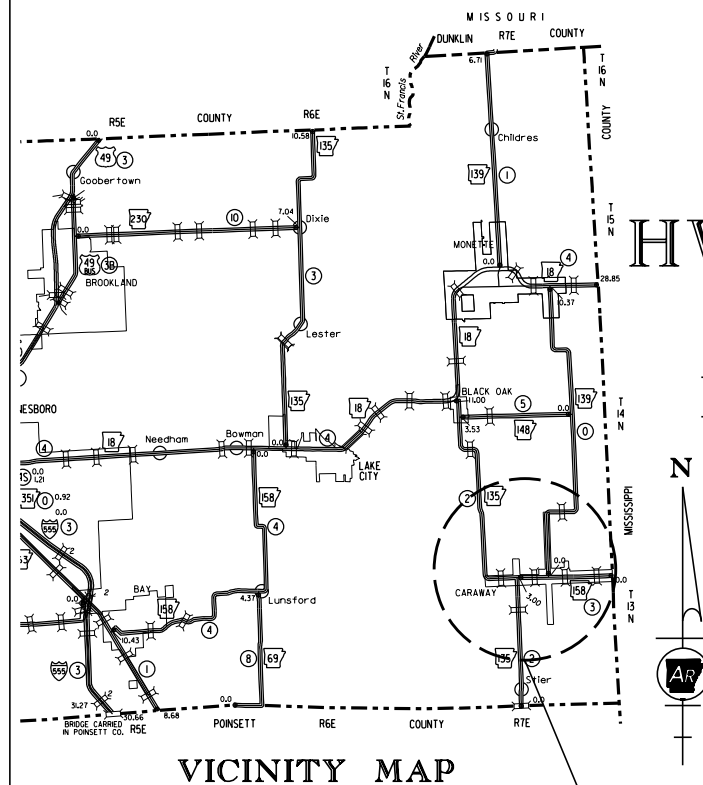


PROJECT LOCATION

- ① STA. 105+00.00
CONSTRUCT QUADRUPLE 9' X 7' X 101'
R.C. BOX CULVERT
WITH 3:1 WINGS LT. & RT.
Q50 = 639 CFS D.A. = 7.51 SQ. MI.
SPAN = 39.17'
- ② STA. 205+00.00
CONSTRUCT QUADRUPLE 12' X 7' X 86'
R.C. BOX CULVERT
WITH 3:1 WINGS LT. & RT.
Q50 = 440 CFS D.A. = 4.24 SQ. MI.
SPAN = 51.17'
- ③ STA. 304+98.00
CONSTRUCT TRIPLE 9' X 6' X 89'
R.C. BOX CULVERT
WITH 3:1 WINGS LT. & RT.
15° RT. FWD. SKEW
Q25 = 440 CFS D.A. = 4.54 SQ. MI.
SPAN = 30.37'

STA. 205+50.00
END SITE 2

STA. 305+50.00
END SITE 3
END JOB 100985

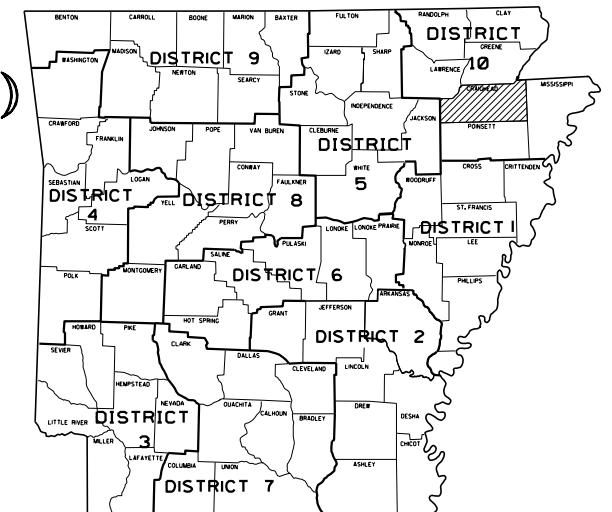
ARKANSAS HIGHWAY DISTRICT 10

· DESIGN TRAFFIC DATA ·

```

DESIGN YEAR-----2043
2023 ADT-----1700
2043 ADT-----2100
2043 DHV-----231
DIRECTIONAL DISTRIBUTION-----0.60
TRUCKS-----12%
DESIGN SPEED-----60 MPH

```

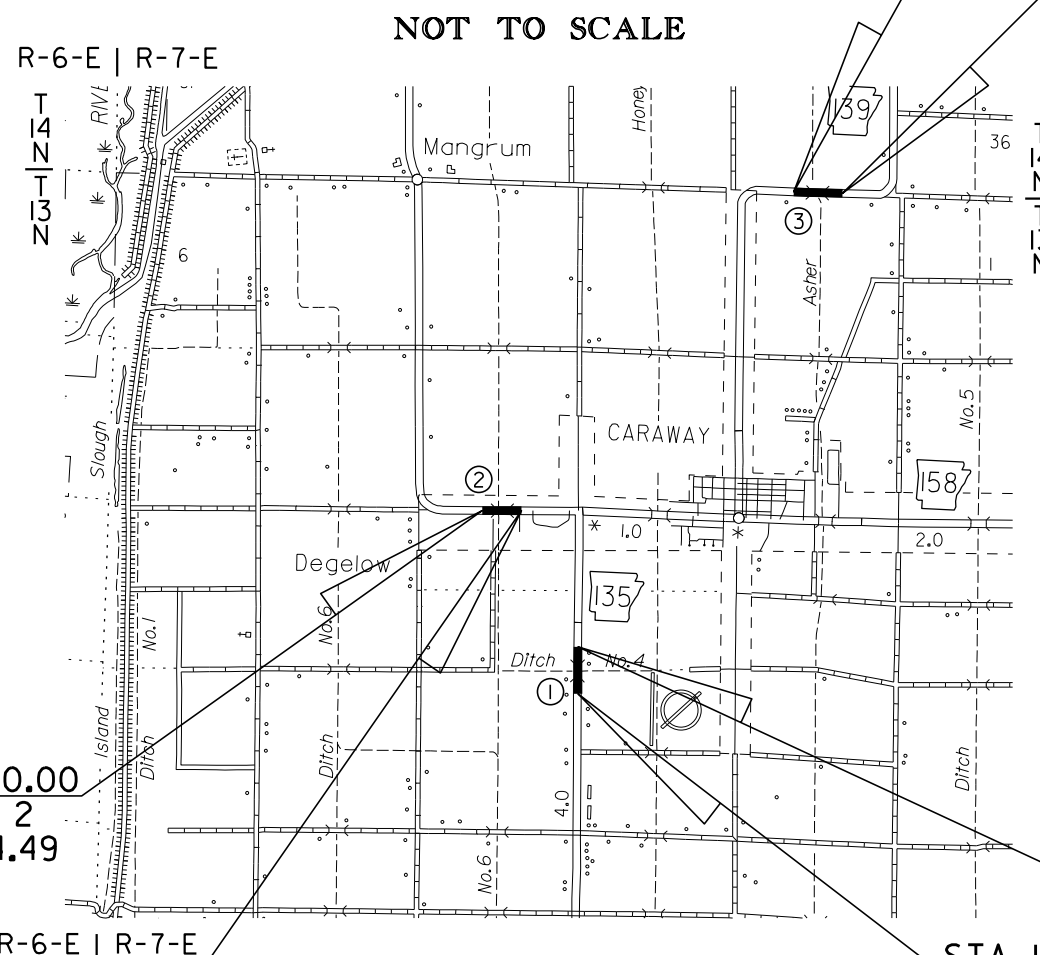

STA. 105+50.00
END SITE 1

STA. 104+50.00
BEGIN JOB 100985
BEGIN SITE 1
LOG MILE 2.99

SITE		BEGIN OF PROJECT	MID-POINT OF PROJECT	END OF PROJECT
SITE 1	LATITUDE	N 35°44'39"	N 35°44'39"	N 35°44'40"
	LONGITUDE	W 90°20'25"	W 90°20'25"	W 90°20'25"
SITE 2	LATITUDE	N 35°45'32"	N 35°45'32"	N 35°45'32"
	LONGITUDE	W 90°20'57"	W 90°20'56"	W 90°20'56"
SITE 3	LATITUDE	N 35°47'15"	N 35°47'15"	N 35°47'15"
	LONGITUDE	W 90°18'50"	W 90°18'50"	W 90°18'49"

JOB 100985			
GROSS LENGTH OF PROJECT	304.00	FEET	0.058 MILES
NET LENGTH OF ROADWAY	183.29	FEET	0.035 MILES
NET LENGTH OF BRIDGES	120.71	FEET	0.023 MILES
NET LENGTH OF PROJECT	304.00	FEET	0.058 MILES



C:\p\c\dwg\1-17-2023 10:59:48 AM
WORKSPACE: ARDOT
\\LITLITARE\Sub\mbooker-corp.com\litlitarock\Projects\ARDOT_174446_100985_Hwy 135 & 139 Strs & Apprs\Design\Civil\Drawings\RD00985_02_IND_01.dgn
REVISED DATE: **REVIDATE**

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
						JOB NO.	100985	2 59

2 INDEX OF SHEETS AND STANDARD DRAWINGS



INDEX OF SHEETS

SHEET NO.	TITLE
1	TITLE SHEET
2	INDEX OF SHEETS AND STANDARD DRAWINGS
3	GOVERNING SPECIFICATIONS AND GENERAL NOTES
4 - 6	TYPICAL SECTIONS OF IMPROVEMENT
7 - 17	SPECIAL DETAILS
18 - 27	TEMPORARY EROSION CONTROL DETAILS
28 - 37	MAINTENANCE OF TRAFFIC DETAILS
38 - 40	PERMANENT PAVEMENT MARKING DETAILS
41 - 42	QUANTITY SHEETS
43	SUMMARY OF QUANTITIES AND REVISIONS
44 - 47	SURVEY CONTROL DETAILS
48 - 51	PLAN AND PROFILE SHEETS
52 - 59	CROSS SECTIONS


ROADWAY STANDARD DRAWINGS

DRWG.NO.	TITLE	DATE
DR-2	DETAILS OF DRIVEWAYS & STREET TURNOUTS	05-19-22
PBC-1	PRECAST CONCRETE BOX CULVERTS	01-28-15
PCC-1	CONCRETE PIPE CULVERT FILL HEIGHTS & BEDDING	02-27-14
PCM-1	METAL PIPE CULVERT FILL HEIGHTS & BEDDING	02-27-14
PCP-1	PLASTIC PIPE CULVERT (HIGH DENSITY POLYETHYLENE)	02-27-14
PCP-2	PLASTIC PIPE CULVERT (PVC F949)	02-27-14
PCP-3	PLASTIC PIPE CULVERT (POLYPROPYLENE)	02-27-20
PM-1	PAVEMENT MARKING DETAILS	02-27-20
RCB-1	REINFORCED CONCRETE BOX CULVERT DETAILS	07-26-12
RCB-2	EXCAVATION PAY LIMITS, BACKFILL, & SOLID SODDING FOR BOX CULVERTS	11-20-03
SE-2	TABLES AND METHOD OF SUPERELEVATION FOR TWO-WAY TRAFFIC	11-07-19
TC-1	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	11-07-19
TC-2	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	05-20-21
TC-3	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	08-12-21
TC-4	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION-TEMPORARY PRECAST BARRIER	11-07-19
TC-5	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION-TEMPORARY PRECAST BARRIER	11-07-19
TEC-1	TEMPORARY EROSION CONTROL DEVICES	11-16-17
TEC-2	TEMPORARY EROSION CONTROL DEVICES	06-02-94
TEC-3	TEMPORARY EROSION CONTROL DEVICES	11-03-94

Byron O. Lawrence, 1/9/2023 3:20:04 PM
\\LITLITARE\Subr\mbaker-corp.com\littit\herock\Projects\AR00T_174446_100985.Hwy 135 & 139 Strs & Apprs\Design\Civil\Drawings\100985_03_GN_01.dgn
WORKSPACE: AR00T
REVISD DATE: **REVDATE**

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
						JOB NO.	100985	3 59

2 GOVERNING SPECIFICATIONS & GENERAL NOTES



GOVERNING SPECIFICATIONS


ARKANSAS STATE HIGHWAY COMMISSION STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION, EDITION OF 2014, AND THE FOLLOWING SPECIAL PROVISIONS AND SUPPLEMENTAL SPECIFICATIONS:

NUMBER	TITLE
ERRATA	ERRATA FOR THE BOOK OF STANDARD SPECIFICATIONS
FHWA-1273	REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - NOTICE TO CONTRACTORS
FHWA-1273	SUPPLEMENT - SPECIFIC EQUAL EMPLOYMENT OPPORTUNITY RESPONSIBILITIES (23 U.S.C. 140)
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - GOALS AND TIMETABLES
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - FEDERAL STANDARDS
FHWA-1273	SUPPLEMENT - POSTERS AND NOTICES REQUIRED FOR FEDERAL-AID PROJECTS
FHWA-1273	SUPPLEMENT - WAGE RATE DETERMINATION
100-3	CONTRACTOR'S LICENSE
100-4	DEPARTMENT NAME CHANGE
102-2	ISSUANCE OF PROPOSALS
105-4	MAINTENANCE DURING CONSTRUCTION
107-2	RESTRAINING CONDITIONS
108-1	LIQUIDATED DAMAGES
108-2	WORK ALLOWED PRIOR TO ISSUANCE OF WORK ORDER
110-1	PROTECTION OF WATER QUALITY AND WETLANDS
210-1	UNCLASSIFIED EXCAVATION
303-1	AGGREGATE BASE COURSE
306-1	QUALITY CONTROL AND ACCEPTANCE
400-1	TACK COATS
400-4	DESIGN AND QUALITY CONTROL OF ASPHALT MIXTURES
400-5	PERCENT AIR VOIDS FOR ACHM MIX DESIGNS
400-6	LIQUID ANTI-STRIP ADDITIVE
400-7	TRACKLESS TACK
404-3	DESIGN OF ASPHALT MIXTURE
410-1	CONSTRUCTION REQUIREMENTS AND ACCEPTANCE OF ASPHALT CONCRETE PLANT MIX COURSES
410-2	DEVICES FOR MEASURING DENSITY FOR ROLLING PATTERNS
410-4	EVALUATION OF ACHM SUBLOT REPLACEMENT MATERIAL
501-2	CEMENT
603-1	LANE CLOSURE NOTIFICATION
604-1	RETROREFLECTIVE SHEETING FOR TRAFFIC CONTROL DEVICES IN CONSTRUCTION ZONES
604-3	TRAFFIC CONTROL DEVICES IN CONSTRUCTION ZONES (MASH)
606-1	PIPE CULVERTS FOR SIDE DRAINS
620-1	MULCH COVER
800-1	STRUCTURES
802-4	CEMENT
804-2	REINFORCING STEEL FOR STRUCTURES
JOB 100985	ASSESSMENT OF WORKING DAYS - MAINTENANCE OF TRAFFIC
JOB 100985	BIDDING REQUIREMENTS AND CONDITIONS
JOB 100985	BROADBAND INTERNET SERVICE FOR ASPHALT CONCRETE PLANT
JOB 100985	BROADBAND INTERNET SERVICE FOR FIELD OFFICE
JOB 100985	BUY AMERICA - CONSTRUCTION MATERIALS
JOB 100985	CARGO PREFERENCE ACT REQUIREMENTS
JOB 100985	COLD MILLING - COUNTY PROPERTY
JOB 100985	CONSTRUCTION IN SPECIAL FLOOD HAZARD AREAS
JOB 100985	DESIGN AND QUALITY CONTROL OF ASPHALT MIXTURES
JOB 100985	DISADVANTAGED BUSINESS ENTERPRISE BIDDER'S RESPONSIBILITIES
JOB 100985	ESTABLISHING CONTRACT TIME - WORKING DAY CONTRACT
JOB 100985	FLEXIBLE BEGINNING OF WORK
JOB 100985	GOALS FOR DISADVANTAGED BUSINESS ENTERPRISE PARTICIPATION
JOB 100985	LIQUIDATED DAMAGES PROCEDURE FOR BID LETTINGS
JOB 100985	LONGITUDINAL JOINT DENSITIES FOR ACHM SURFACE COURSES
JOB 100985	MAINTENANCE OF TRAFFIC
JOB 100985	MANDATORY ELECTRONIC CONTRACT
JOB 100985	MANDATORY ELECTRONIC DOCUMENT SUBMITTAL
JOB 100985	NESTING SITES OF MIGRATORY BIRDS
JOB 100985	PARTNERING REQUIREMENTS
JOB 100985	PLASTIC PIPE
JOB 100985	PRICE ADJUSTMENT FOR ASPHALT BINDER
JOB 100985	PRICE ADJUSTMENT FOR FUEL
JOB 100985	PROHIBITION OF CERTAIN TELECOMMUNICATIONS AND VIDEO SURVEILLANCE SERVICES OR EQUIPMENT
JOB 100985	SHORING FOR CULVERTS
JOB 100985	SOIL STABILIZATION
JOB 100985	STORM WATER POLLUTION PREVENTION PLAN
JOB 100985	SUBMISSION OF ASPHALT CONCRETE HOT MIX ACCEPTANCE TEST RESULTS
JOB 100985	UTILITY ADJUSTMENTS
JOB 100985	VALUE ENGINEERING
JOB 100985	WARM MIX ASPHALT

GENERAL NOTES


- GRADE LINE DENOTES FINISHED GRADE WHERE SHOWN ON PLANS.
- ALL PIPE LINES, POWER, TELEPHONE, AND TELEGRAPH LINES TO BE MOVED OR LOWERED BY THE RESPECTIVE OWNERS AS PER AGREEMENT WITH SUCH OWNERS.
- ANY EQUIPMENT OR APPURTENANCE THAT INTERFERES WITH THE PROPOSED CONSTRUCTION AND WHICH MAY BE THE PROPERTY OF UTILITY SERVICE ORGANIZATIONS SHALL BE MOVED BY THE OWNERS UNLESS OTHERWISE PROVIDED.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING U. S. MAILBOXES WITHIN THE PROJECT LIMITS IN SUCH A MANNER THAT THE PUBLIC MAY RECEIVE CONTINUED MAIL SERVICE. PAYMENT WILL BE CONSIDERED INCLUDED IN THE PRICE BID FOR THE VARIOUS BID ITEMS.
- ALL LAND MONUMENTS LOCATED WITHIN THE CONSTRUCTION AREA SHALL BE PROTECTED IN ACCORDANCE WITH SECTION 107.12 OF THE STANDARD SPECIFICATIONS.
- ALL TREES THAT DO NOT DIRECTLY INTERFERE WITH THE PROPOSED CONSTRUCTION SHALL BE SPARED IF AND WHERE DIRECTED BY THE ENGINEER. CARE AND DISCRETION SHALL BE USED TO ENSURE THAT ALL TREES NOT TO BE REMOVED SHALL BE HARMED AS LITTLE AS POSSIBLE DURING THE CONSTRUCTION OPERATIONS.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING A FENCE TO CONTROL LIVESTOCK IN AREAS WHERE PASTURES ARE SEVERED. WIRE FENCE MAY BE CONSTRUCTED INITIALLY, OR IN LIEU THEREOF, THE CONTRACTOR AT HIS OWN EXPENSE, MAY ELECT TO PROVIDE TEMPORARY FENCING SUITABLE TO CONTAIN LIVESTOCK.
- THE SEQUENCE AS SHOWN ON THE MAINTENANCE OF TRAFFIC PLANS IS A GENERAL OUTLINE FOR THE CONSTRUCTION OF THIS PROJECT, AND IN NO WAY IS IT INTENDED TO COVER EVERY ITEM IN THE PROJECT. ITEMS NOT CRITICAL TO THE CONSTRUCTION SEQUENCE MAY BE CONSTRUCTED IN ANY STAGE AS APPROVED BY THE RESIDENT ENGINEER.
- ALL FLEXIBLE BASE AND ASPHALTIC PAVEMENTS REMOVED SHALL BE PAID FOR UNDER THE ITEM NO. 210 - UNCLASSIFIED EXCAVATION.
- THE EXISTING ASPHALT PAVEMENT TO BE REMOVED FROM THE REMAINING PAVEMENT SHALL BE SEPARATED BY SAWING ALONG A NEAT LINE. AFTER SAWING, THE PAVEMENT TO BE REMOVED SHALL BE CAREFULLY REMOVED IN A MANNER THAT WILL NOT DAMAGE THE PAVEMENT THAT IS TO REMAIN. ANY DAMAGE OF THE ASPHALT PAVEMENT THAT IS TO REMAIN IN PLACE SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE.
- THIS PROJECT IS COVERED UNDER A SECTION 404 NATIONWIDE 14 PERMIT. REFER TO SECTION 110 OF THE STANDARD SPECIFICATIONS, EDITION OF 2014, FOR PERMIT REQUIREMENTS.

V 1117 FILENAME

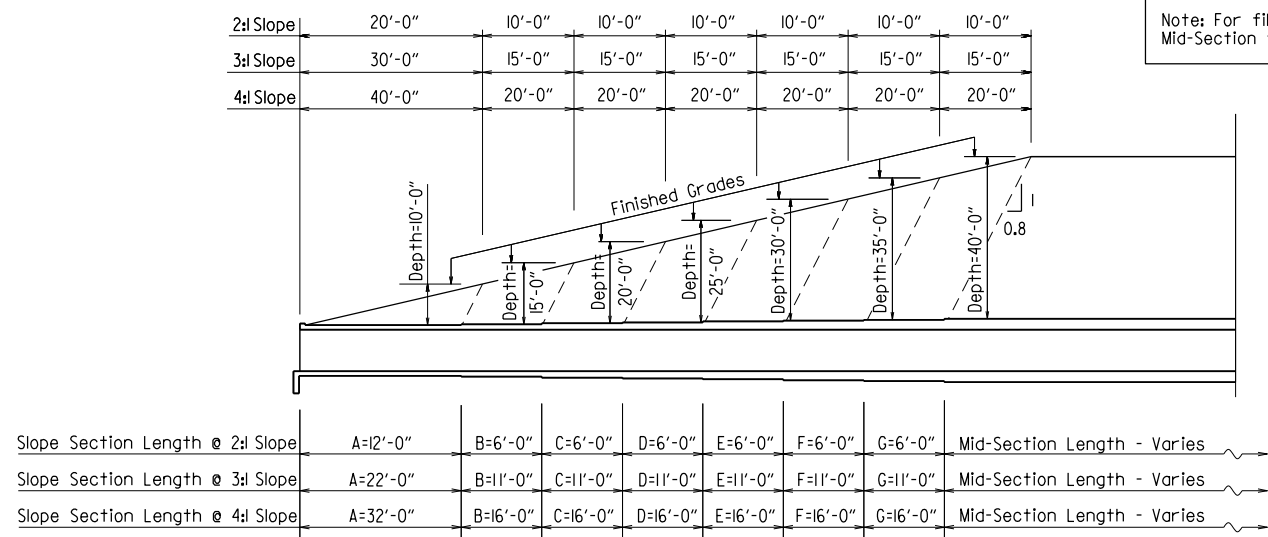


LONGITUDINAL SECTION LENGTH SCHEDULE FOR VARYING FILL DEPTHS OVER 10'

Lengths for Non-Skewed Boxes

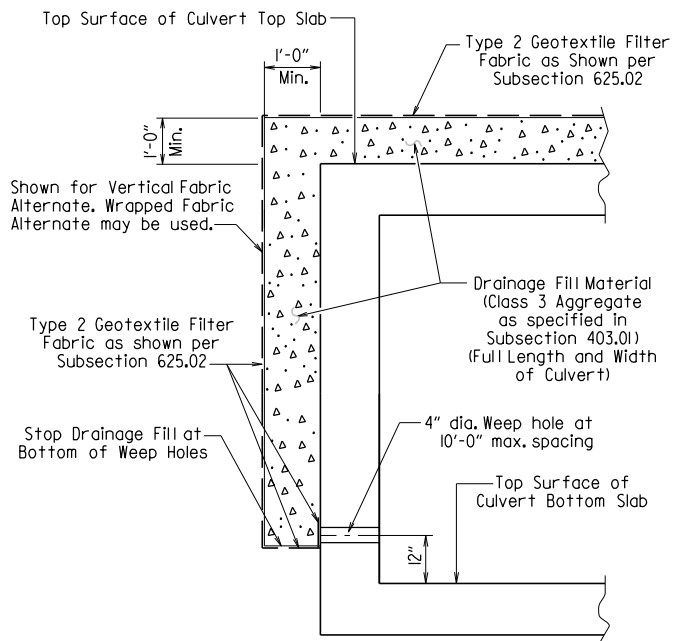


CULVERT DRAINAGE DETAIL FOR ROCK FILL

This detail shall be used when rock fill is specified for embankment construction.

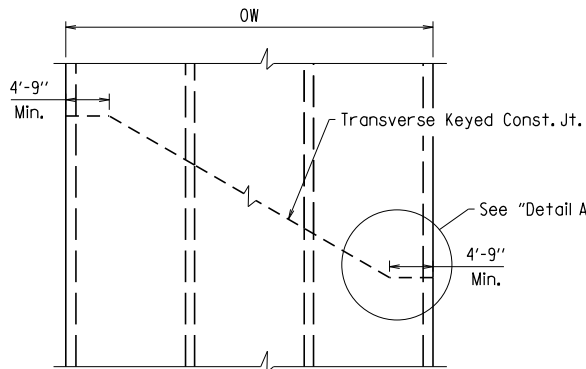

SKewed TRANSVERSE JOINT DETAIL

This detail shall be used to construct a skewed transverse joint only for Multi-Barrel Culverts and only when required by the Maintenance of Traffic Plans. Otherwise, transverse joints should be made normal to the centerline of the barrel.

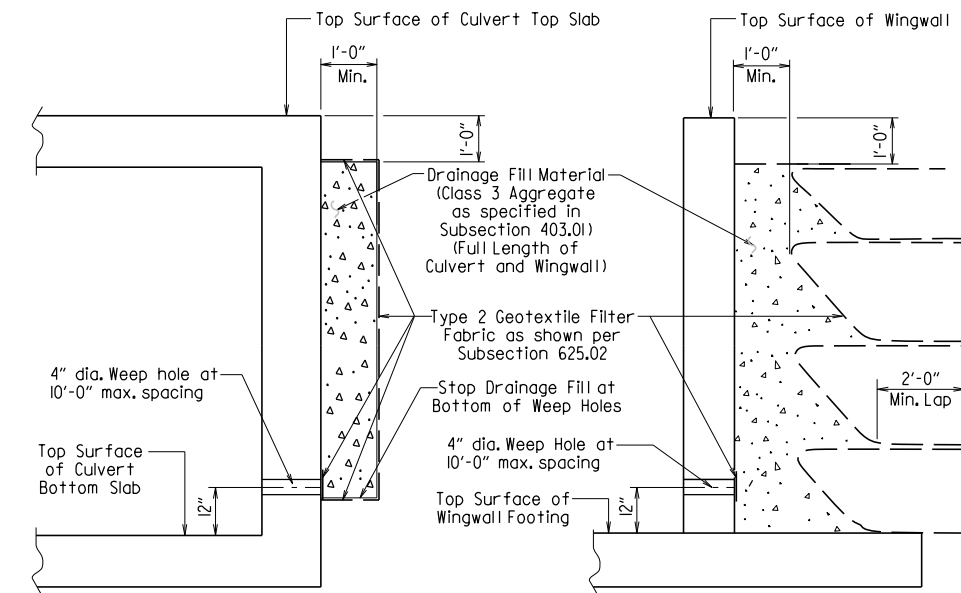

For Details of Excavation and Pay Limits, see Standard Drawing RCB-2.

VERTICAL FABRIC ALTERNATE


(Shown for Culvert, Similar for Wingwall)

WRAPPED FABRIC ALTERNATE

(Shown for Wingwall, Similar for Culvert)

WINGWALL & CULVERT DRAINAGE DETAIL

Slab bars "a", "b", "c", "d", "bl", or "f". Slab distribution and Wall reinforcing omitted for clarity.

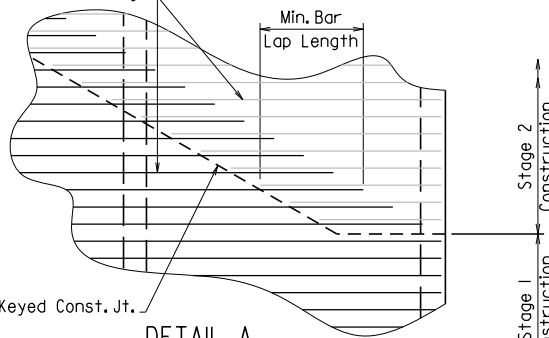


DETAIL A

See Tabular Data Sheets for Minimum Bar Lap Lengths.

Shown for transverse reinforcing, longitudinal reinforcing similar.

* LL = Skewed End Section Length - See "Skewed End Section Details" Length LL varies with skew angle, overall box width and fill depth and may eliminate the need for some slope section lengths as shown.

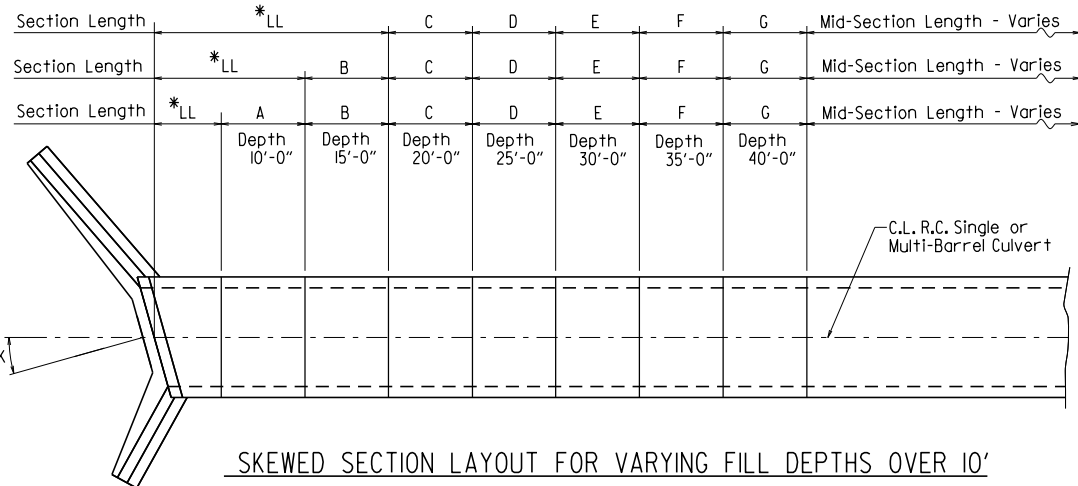

SKewed SECTION LAYOUT FOR VARYING FILL DEPTHS OVER 10'

GENERAL NOTES:

CONSTRUCTION SPECIFICATIONS: Arkansas State Highway and Transportation Department Standard Specifications for Highway Construction (2014 edition) with applicable Supplemental Specifications and Special Provisions. Section and Subsection refer to the Standard Construction Specifications unless otherwise noted in the Plans.

DESIGN SPECIFICATIONS: AASHTO LRFD Bridge Design Specifications, Fifth Edition (2010) with 2010 interim revisions.

LIVE LOADING: HL-93

All concrete shall be Class S with a minimum 28-day compressive strength of 3,500 psi and shall be poured in the dry. All exposed corners to have 3/8" chamfers.

Reinforcing Steel shall be Grade 60 (yield strength = 60,000 psi) conforming to AASHTO M31 or M322, Type A, with mill test reports.

Reinforcing Steel Tolerances: The tolerances for reinforcing steel shall meet those listed in 'Manual of Standard Practice' published by Concrete Reinforcing Steel Institute (CRSI) except that the tolerance for truss bars such as Figure 3 on page 7-4 of the CRSI Manual shall be minus zero to plus 1/2 inch.

Excavation and backfilling shall be in accordance with the requirements of Section 801.

Membrane Waterproofing shall conform to the requirements of Section 815. Membrane Waterproofing shall be Type C and as directed by the Engineer applied to all construction joints in the top slab and the sidewalls of R.C. Box culverts and to the construction joint between wingwalls and R.C. Box culvert walls.

Weep Holes in box culvert walls shall have a maximum horizontal spacing of 10'-0" and shall be spaced to clear all reinforcing steel. The drain opening shall be 4" diameter and shall be placed 12" above the top of the bottom slab.

Weep Holes in wingwalls shall have a maximum horizontal spacing of 10'-0" and shall be spaced to clear all reinforcing steel. There shall be a minimum of two (2) weep holes in each wingwall. The drain opening shall be 4" diameter and shall be placed 12" above the top of the wingwall footing.

The barrel components of the culvert may be constructed using continuous pours. For longer culvert construction, the Contractor may use multiple pours with transverse construction joints spaced a minimum of 50 feet apart unless superseded by stage construction or site constraints as approved by the Engineer. Construction joints between footings and walls shall be made only where shown in the Plans. Joints shall be keyed and shall be normal to the centerline of barrel except as noted. Reinforcing shall be continuous through joints unless noted otherwise. Reinforcing through stage construction joints shall provide the minimum bar lap length shown on the Tabular Data Sheets. All longitudinal construction joints shall be submitted to the Engineer for approval.

Membrane Waterproofing, Weep Holes, Geotextile Filter Fabric, and Drainage Fill Material will not be paid for directly but shall be considered subsidiary to Class S Concrete.


When the top slab of the box culvert serves as finished roadway surface, curing and finishing shall be in accordance with subsections 802.17 and 802.20 for bridge roadway surface and a tine finish shall be applied in accordance with subsection 802.19 for Class 5 Tined Bridge Roadway Surface Finish. Curing and finishing shall not be paid for directly, but shall be considered incidental to the item "Class 5 Concrete-Roadway". Class 1 Protective Surface Treatment shall be applied to the roadway surface and this work shall be paid for under the unit price bid for "Class 1 Protective Surface Treatment".

When precast reinforced concrete box culverts are substituted for cast in place box culverts, they shall be manufactured according to ASTM C 1577 and meet the requirements of Section 607. When the top slab of the box culvert serves as the finished roadway surface, a precast reinforced concrete box culvert substitution is not allowed.


SHEET 1 OF 4
GENERAL DETAILS OF R.C. BOX CULVERT
GENERAL NOTES &
LONGITUDINAL SECTION LENGTH SCHEDULE
SPECIAL DETAILS



DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		100985	9	59
SPECIAL DETAILS								

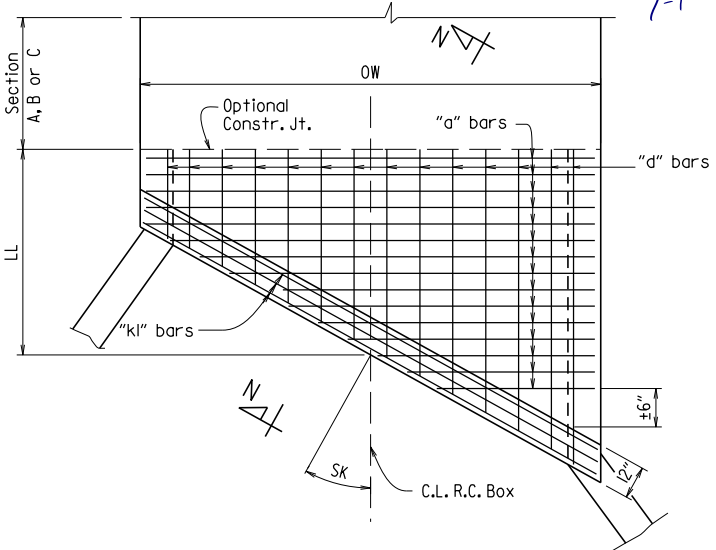


TOP SLAB REINFORCEMENT

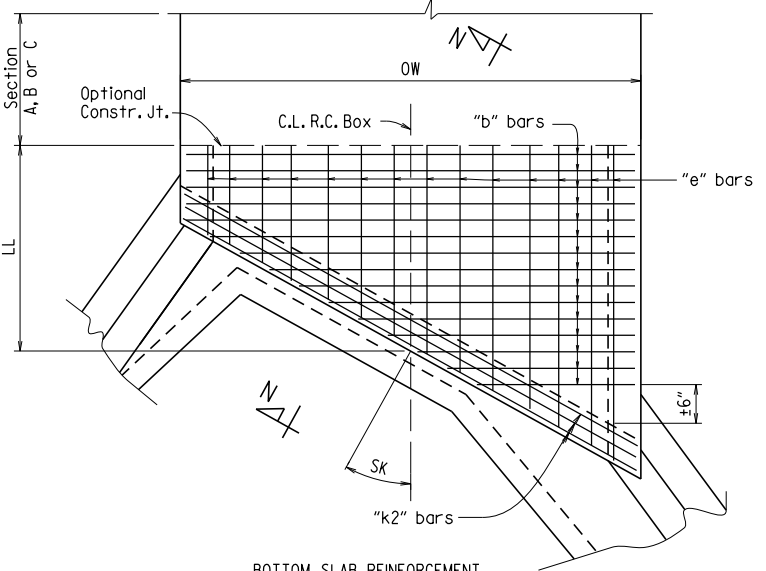

BOTTOM SLAB REINFORCEMENT

SKewed END SECTION DETAILS


SHEET 2 OF 4
GENERAL DETAILS OF R.C. BOX CULVERT
DETAILS OF SINGLE BARREL
R.C. BOX CULVERT
SPECIAL DETAILS

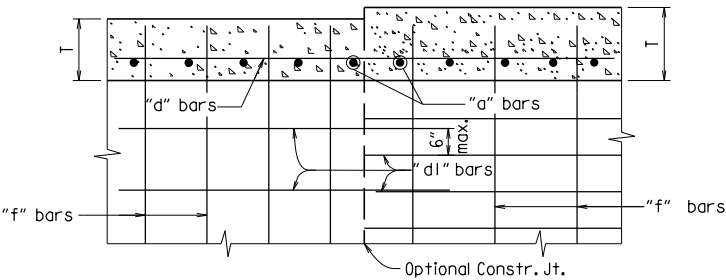

Longitudinal Bar Spacing at individual sections shall be maintained, which may result in noncontact bar laps.


LONGITUDINAL LAP DETAIL AT CHANGE IN SECTIONS

TOP SLAB SHOWN, BOTTOM SLAB SIMILAR

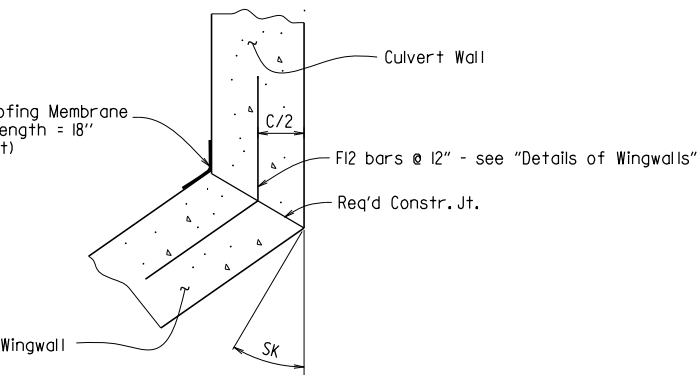


WINGWALL ATTACHMENT

See "Details of Wingwalls" for additional information and wingwall details.





TYPICAL KEYWAY DETAIL

(All Construction Joints)

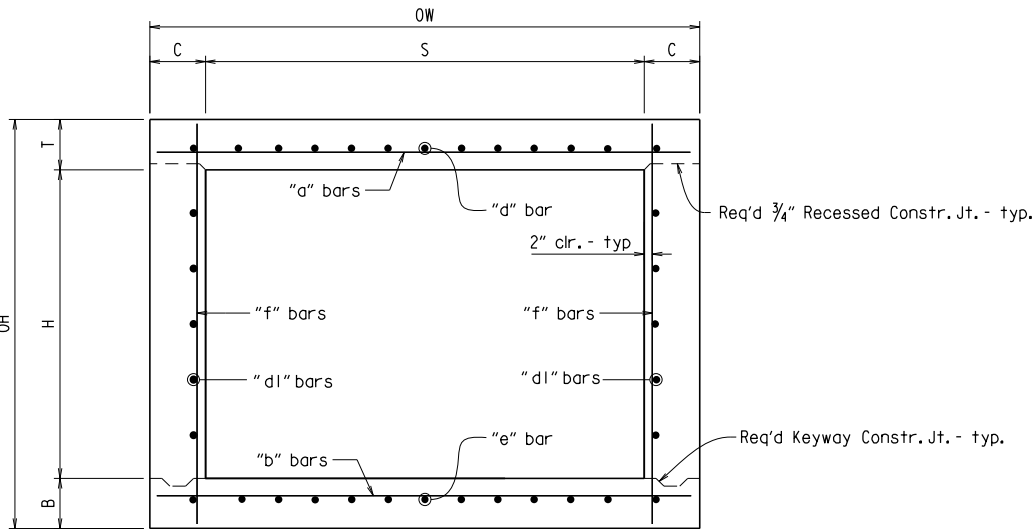


TYPICAL SECTION M-M

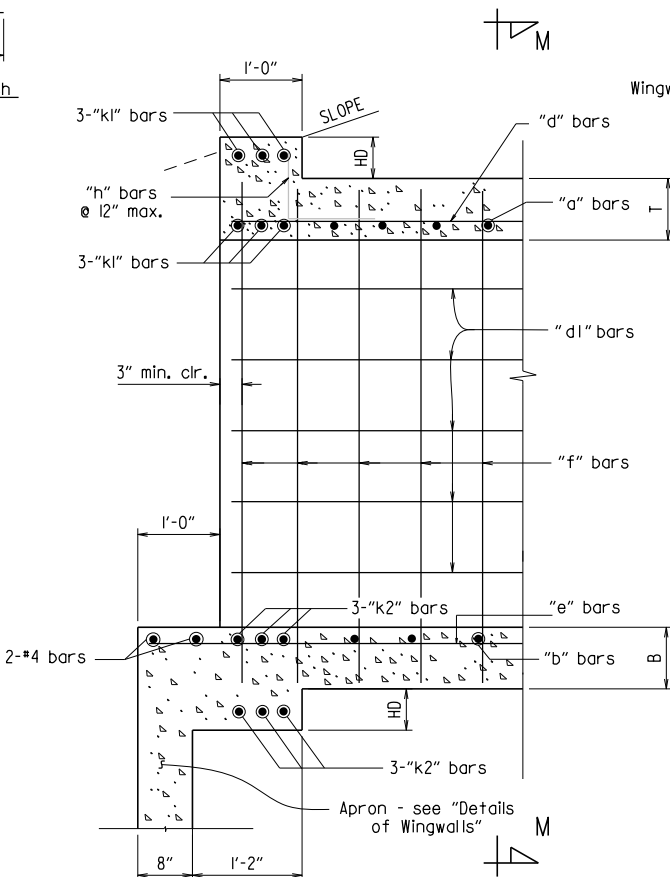

PART LONGITUDINAL SECTION N-N

(Skewed Ends)

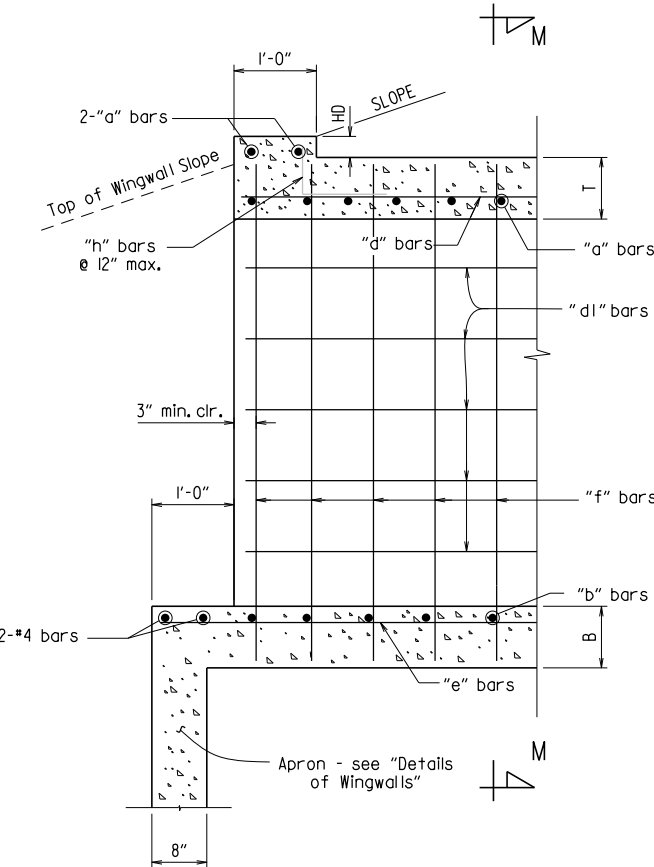


PART LONGITUDINAL SECTION

(Non-Skewed Ends)

Note: When top slab of culvert serves as finished roadway surface, see General Notes on Sheet 1 of 4.

① 2" clr. for fill depth (D) greater than 2 ft.
2 1/2" clr. for fill depth (D) equal to or less than 2 ft.


Note: When top slab of culvert serves as finished roadway surface, see General Notes on Sheet 1 of 4.

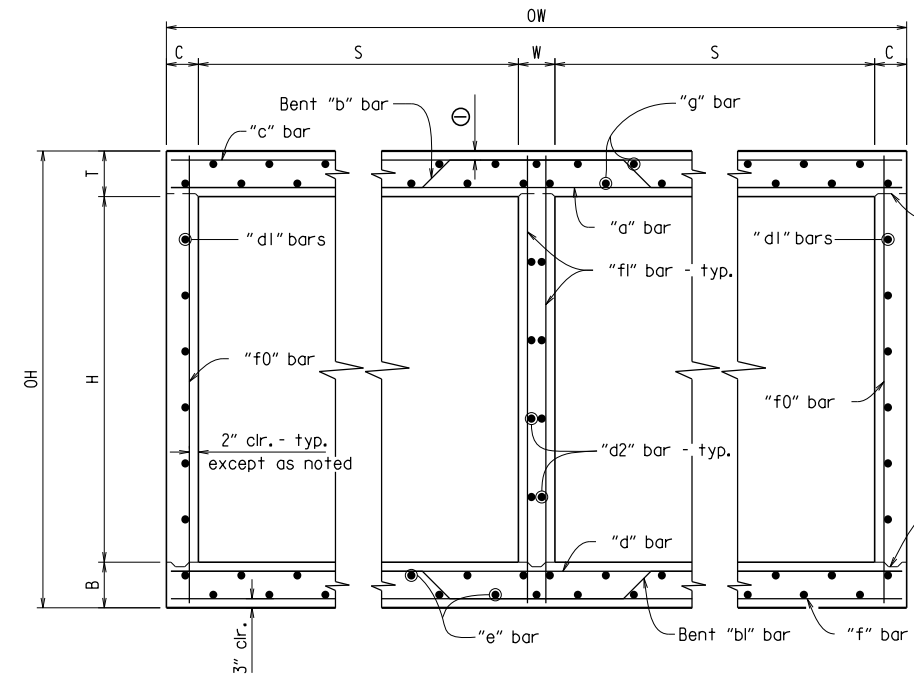


TYPICAL SECTION M-M

Top Slab
Straight "c" bars shall alternate with Bent "b" bars in top.
Straight "a" bars shall alternate with Bent "b" bars in bottom.

Bottom Slab
Straight "d" bars shall alternate with Bent "bl" bars in top.
Straight "f" bars shall alternate with Bent "bl" bars in bottom.



"h" bars sketch

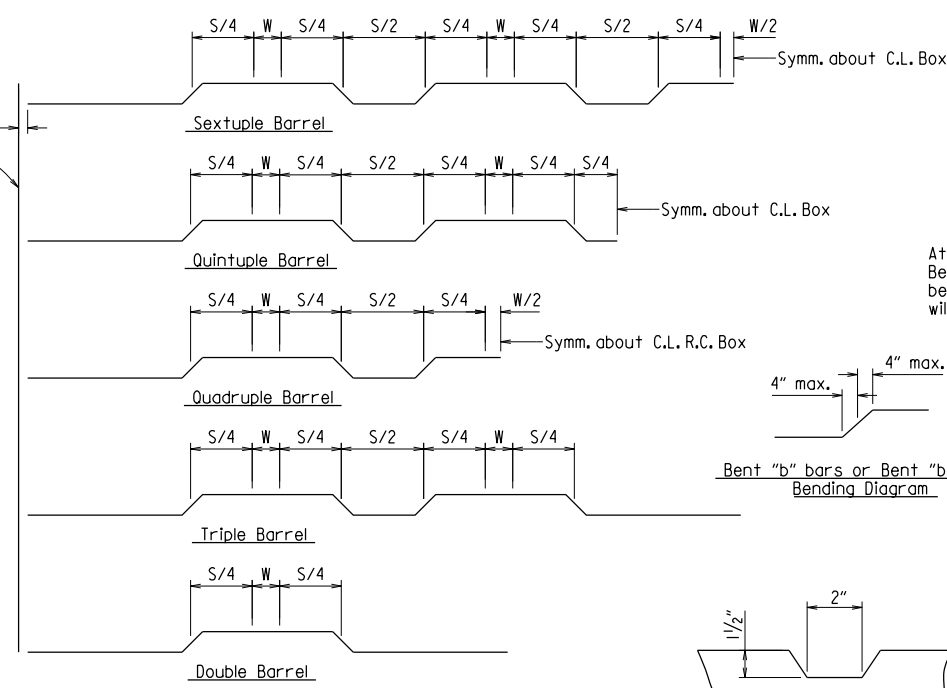


Bent "b" bars or Bent "bl" bars sketch



TYPICAL KEYWAY DETAIL
(All Construction Joints)

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		100985	10	59


SPECIAL DETAILS

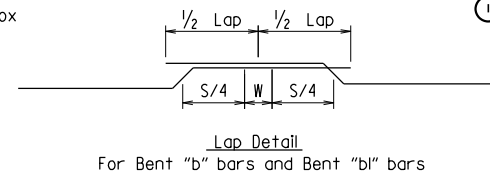


At the Contractor's option in lieu of providing Bent "b" or Bent "bl" bars, one bar top and bottom of equivalent size may be substituted for each bent bar. Payment for the reinforcing will be based on the weight of the "b" or "bl" bar.

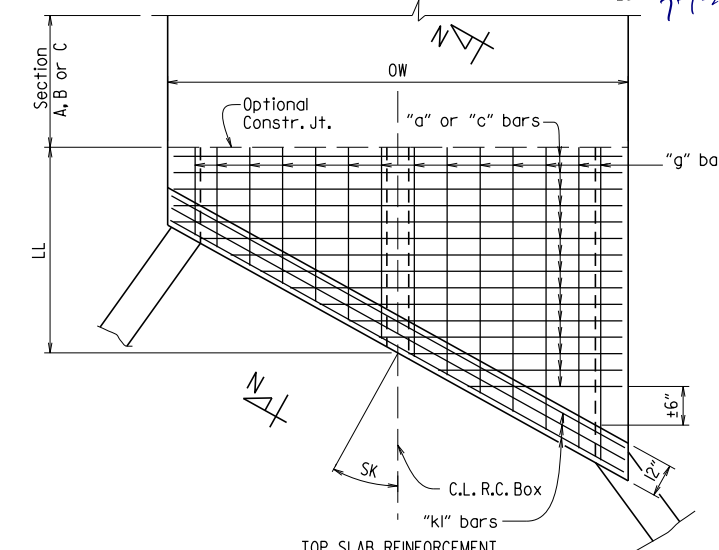


TOP SLAB REINFORCEMENT
Straight "c" bars in top.
Straight "a" bars in bottom.

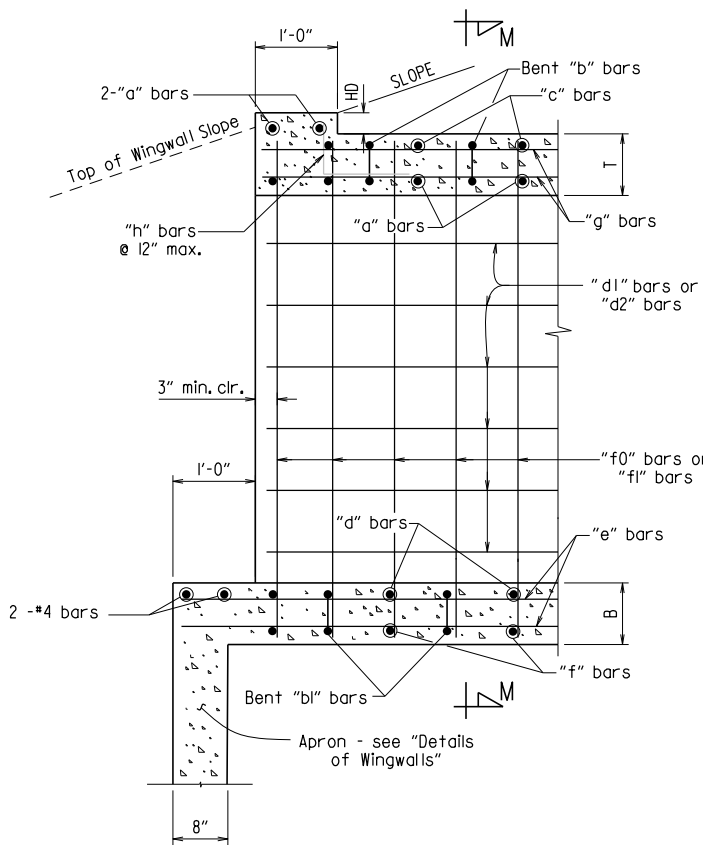


PART LONGITUDINAL SECTION
(Non-Skewed Ends)

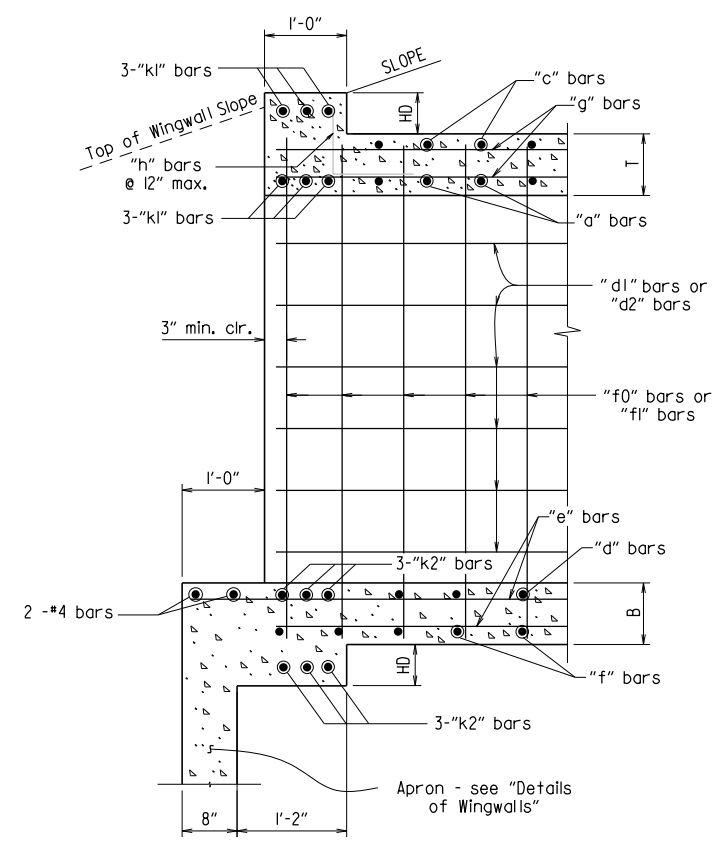

PART LONGITUDINAL SECTION N-N
(Skewed Ends)

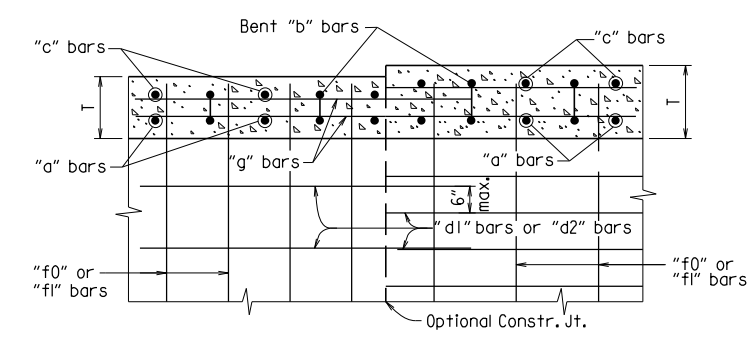


LONGITUDINAL LAP DETAIL AT CHANGE IN SECTIONS
TOP SLAB SHOWN, BOTTOM SLAB SIMILAR

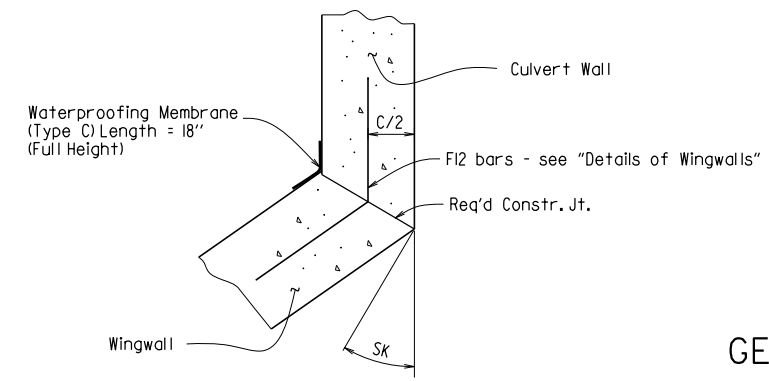

WINGWALL ATTACHMENT


See "Details of Wingwalls" for additional information and wingwall details.

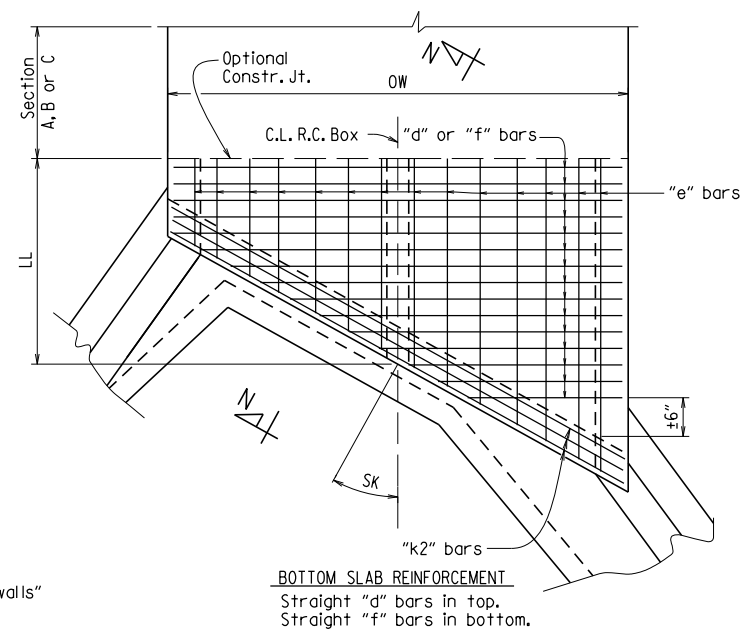


SKewed END SECTION DETAILS

SHEET 3 OF 4
GENERAL DETAILS OF R.C. BOX CULVERT
DETAILS OF MULTI-BARREL
R.C. BOX CULVERT
SPECIAL DETAILS


DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		100985	II	59
SPECIAL DETAILS								

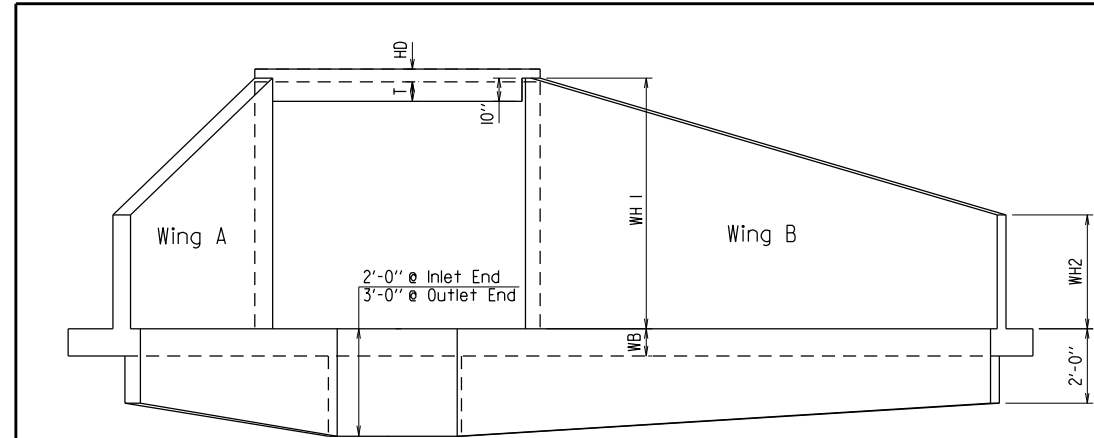


END ELEVATION
Flared Wingwalls Shown

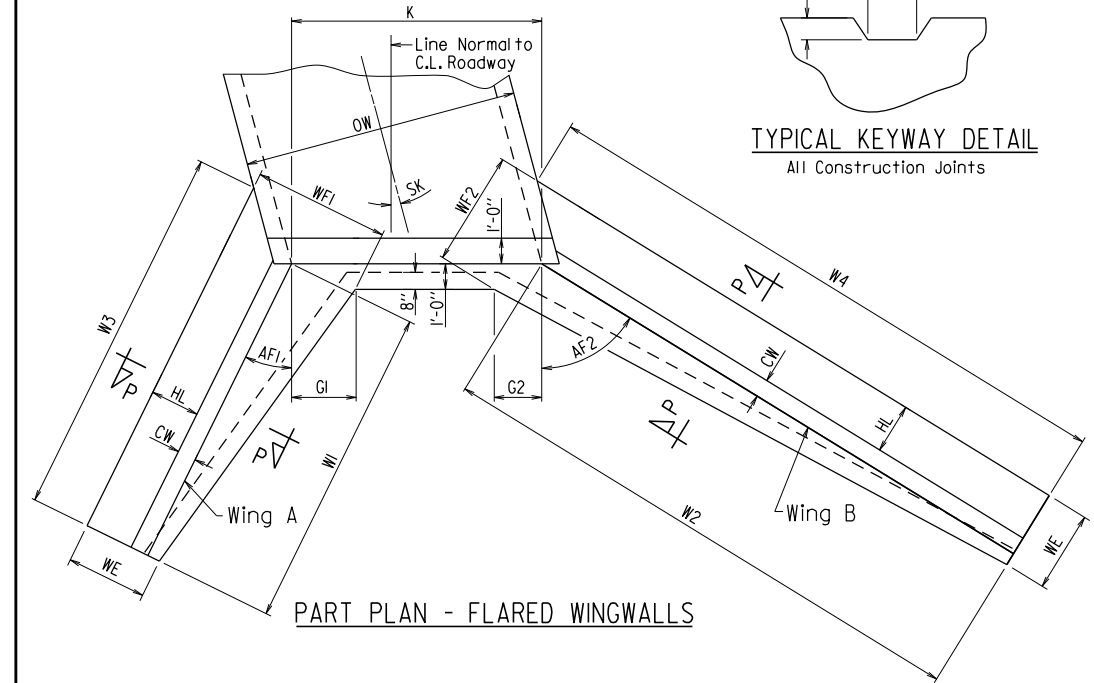

PART PLAN - FLARED WINGWALLS

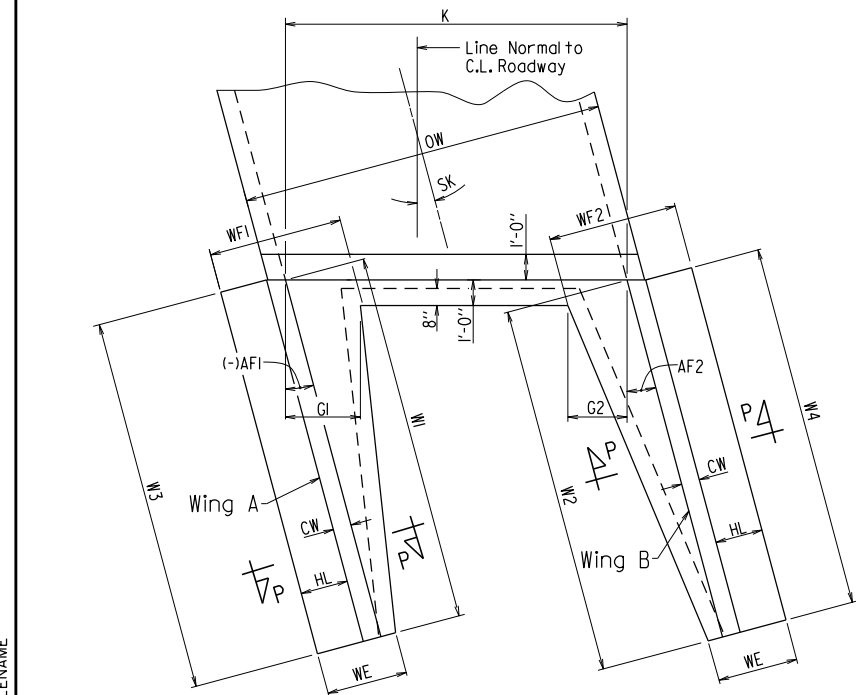


PART PLAN - PARALLEL WINGWALLS

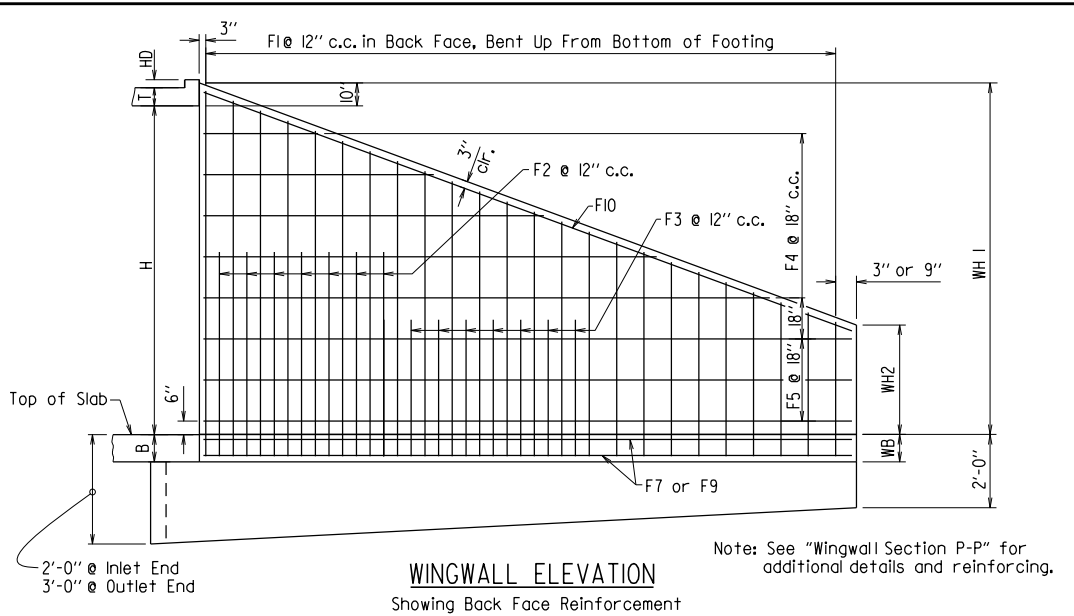


WINGWALL ELEVATION
Showing Back Face Reinforcement


Note: See "Wingwall Section P-P" for additional details and reinforcing.

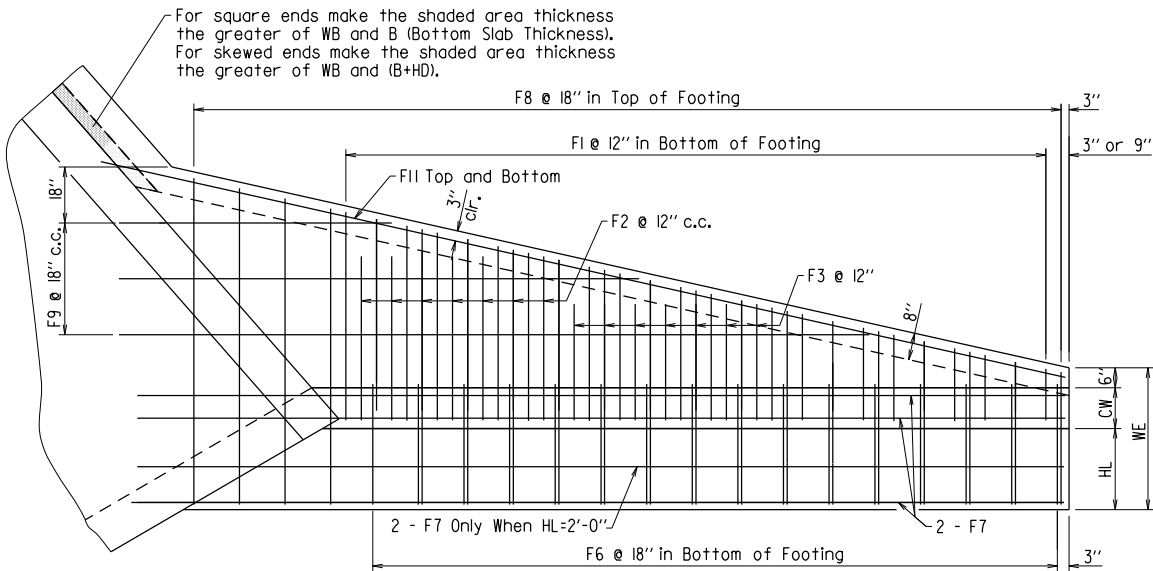


PLAN - FLARED WINGWALLS
Showing Footing Reinforcement

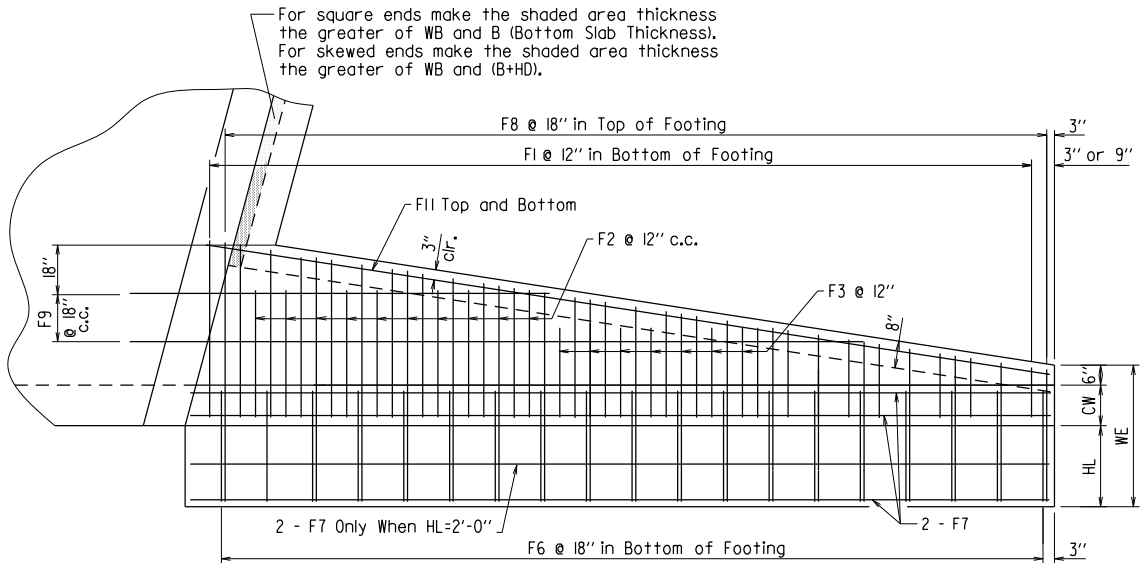

PLAN - PARALLEL WINGWALLS
Showing Footing Reinforcement

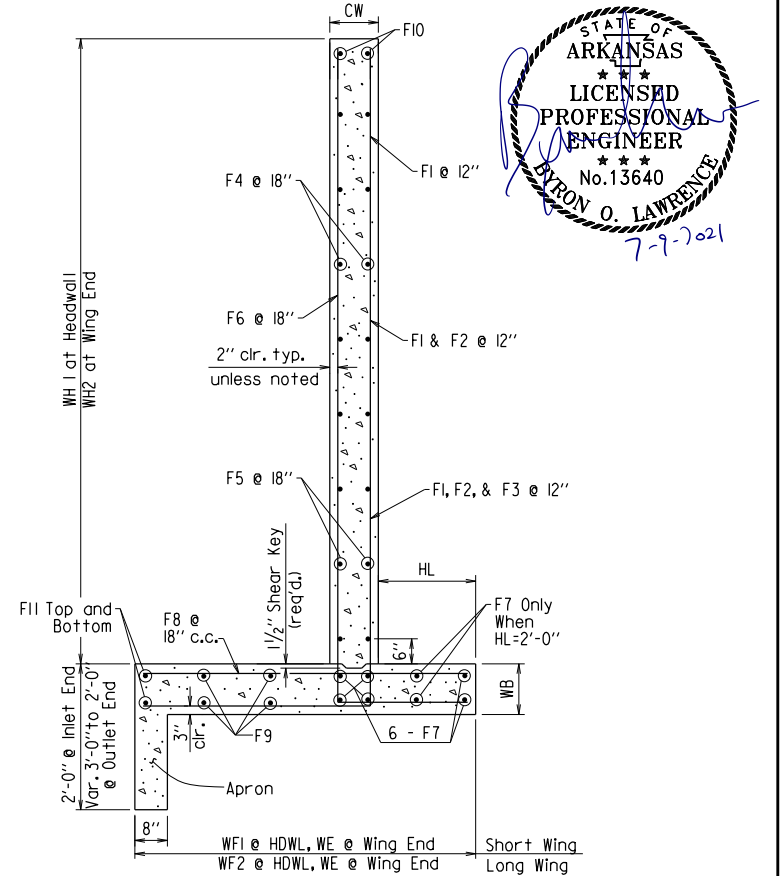


WINGWALL SECTION P-P

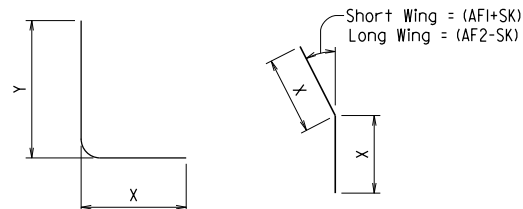

FI, F2, F3, & F6 BARS

F12 BAR

F12 is a straight bar for parallel wingwalls

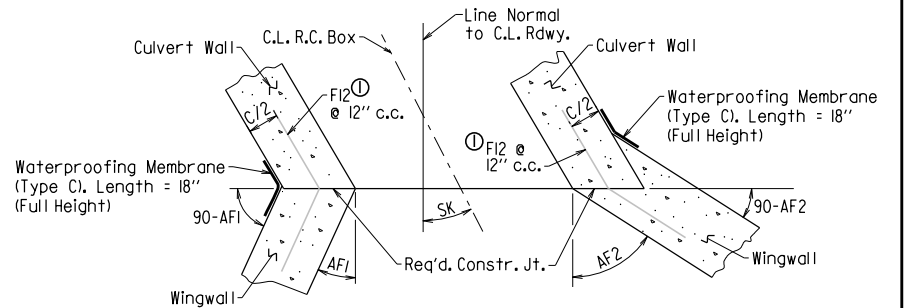

CONSTRUCTION JOINTS
Flared Wingwalls Shown



MID-SECTION

R.C. BOX SECTION	DESIGN FILL DEPTH (FT.)		CLEAR SPAN (FT.)		CLEAR HEIGHT (FT.)		TOP SLAB THK.	BOTTOM SLAB THK.	SIDE WALL THK.	INTERIOR WALL THK.	OVER ALL WIDTH	OVER ALL HEIGHT	SECTION LENGTH (FT.)	TOP SLAB REINFORCING STEEL								BOTTOM SLAB REINFORCING STEEL								SIDE WALL REINFORCING STEEL				INTERIOR WALL REINFORCING STEEL				TOP SLAB DISTRIBUTION REINF. STEEL			BOTTOM SLAB DISTRIBUTION REINF. STEEL			SIDE WALL DISTRIBUTION REINF. STEEL			INTERIOR WALL DISTRIBUTION REINF. STEEL																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	D	S	H	T	B	C								W	OW	OH	SL	LENGTH = OW - 4" + BENDS				LENGTH = OW - 4" + BENDS				LENGTH = OH - 4"				LENGTH = OH - 4"				LENGTH = SL		LENGTH = SL		LENGTH = SL		LENGTH = SL																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
																		"a"		Bent "b"		"c"		SPACING	NO. REQ'D	"d"		Bent "b1"		"f"		SPACING	NO. REQ'D	SIZE	SPACING	NO. REQ'D	LENGTH	SIZE	SPACING	NO. REQ'D	LENGTH	SIZE	SPACING	NO. REQ'D	SIZE	SPACING	NO. REQ'D	SIZE	SPACING	NO. REQ'D																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
																		SIZE	L	SIZE	L	SIZE	L			SIZE	L	SIZE	L	SIZE	L																				SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L	SIZE	L

MID-SECTION

R.C. BOX SECTION	DESIGN FILL DEPTH (FT.)									SECTION LENGTH (FT.)	TOP SLAB REINFORCING STEEL								BOTTOM SLAB REINFORCING STEEL								SIDE WALL REINFORCING STEEL				INTERIOR WALL REINFORCING STEEL				TOP SLAB DISTRIBUTION REINF. STEEL			BOTTOM SLAB DISTRIBUTION REINF. STEEL			SIDE WALL DISTRIBUTION REINF. STEEL			INTERIOR WALL DISTRIBUTION REINF. STEEL															
	CLEAR SPAN (FT.)				CLEAR HEIGHT (FT.)						LENGTH = OW - 4' + BENDS								LENGTH = OW - 4' + BENDS								"f0"				"f1"				"g"			"e"			"d1"			"d2"															
	D	S	H	T	B	C	W	OW	OH		SL	"a"		Bent "b"		"c"		SPACING	NO. REQ'D	"d"		Bent "b1"		"f"		SPACING	NO. REQ'D	SIZE	SPACING	NO. REQ'D	LENGTH	SIZE	SPACING	NO. REQ'D	LENGTH	SIZE	SPACING	NO. REQ'D	SIZE	SPACING	NO. REQ'D	SIZE	SPACING	NO. REQ'D	SIZE	SPACING	NO. REQ'D	SIZE	SPACING	NO. REQ'D	SIZE	SPACING	NO. REQ'D	SIZE	SPACING	NO. REQ'D	SIZE	SPACING	NO. REQ'D
A	2	9	6	11.5	11.5	6	8	29'-4"	7'-11"	77.17	4	29'-0"	8	29'-8"	8	29'-0"	17	54	4	29'-0"	4	29'-7"	4	29'-0"	18	51	4	6	308	7'-7"	4	12	308	7'-7"	4	9	77	4	9	77	4	12	12	4	12	24													

200.71	CU. YDS.	CLASS "S" CONCRETE
25520	LBS.	REINFORCING STEEL (GR. 60)

INLET SLOPE SECTION(S)

[illegible]

	CU. YDS.	CLASS "S" CONCRETE
TOTAL		

Design Fill Depth	Range of Actual Fill Depth
2	0.0 ft - 2.0 ft
5	>2.0 ft - 5.0 ft
10	>5.0 ft - 10.0 ft
15	>10.0 ft - 15.0 ft
20	>15.0 ft - 20.0 ft
25	>20.0 ft - 25.0 ft
30	>25.0 ft - 30.0 ft
35	>30.0 ft - 35.0 ft
40	>35.0 ft - 40.0 ft

Data shown for Mid-Section, Slope Section(s), and Skewed End Section is based on the design fill depth shown in the table, see PLAN AND PROFILE SHEETS for actual fill depth.

INLET SKEWED END SECTION

[illegible]

16.03	CU. YDS.	CLASS "S" CONCRETE (Includes HDWL)
2592	LBS.	① REINFORCING STEEL (GR 60) (Includes HDWL)

① Any Bar Lap Required for the Skewed End Section shall be considered subsidiary to the item "Reinforcing Steel - Roadway (Grade 60)."

INLET WINGWALL TABLE

[illegible]

MID-SECTION
BAR LAP TABLE


# of Long. Laps Req'd.	SL = Section Length
0	< 40.0 ft
1	>40.0 ft - 78.0 ft
2	>78.0 ft - 116.0 ft
3	>116.0 ft - 154.0 ft
4	>154.0 ft - 192.0 ft
5	>192.0 ft - 230.0 ft
6	>230.0 ft - 268.0 ft
7	>268.0 ft - 306.0 ft
8	>306.0 ft - 344.0 ft

Min. Bar Lap Length	
#4	1'-9"
#5	2'-2"
#6	2'-7"
#7	3'-6"
#8	4'-7"

#4	3"
#5	3 3/4"
#6	4 1/2"
#7	5 1/4"
#8	6"



This drawing to be used in conjunction with
SHEET 1 OF 4, "GENERAL DETAILS OF R.C. BOX CULVERT", 'GENERAL NOTES & LONGITUDINAL SECTION LENGTH SCHEDULE';
SHEET 3 OF 4, "GENERAL DETAILS OF R.C. BOX CULVERT", 'DETAILS OF MULTI-BARREL R.C. BOX CULVERT',
SHEET 4 OF 4, "GENERAL DETAILS OF R.C. BOX CULVERT", 'DETAILS OF WINGWALLS', and
STANDARD DRAWING RCB-2.

For additional information and outlet sections, see Sheet 2 of 2.



TABULAR DATA BY: SWB DATE: 01/13/2021
CHECKED BY: ERBB DATE: 06/21/2021

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
						JOB NO.	100985	38 59
2 PERMANENT PAVEMENT MARKING DETAILS								

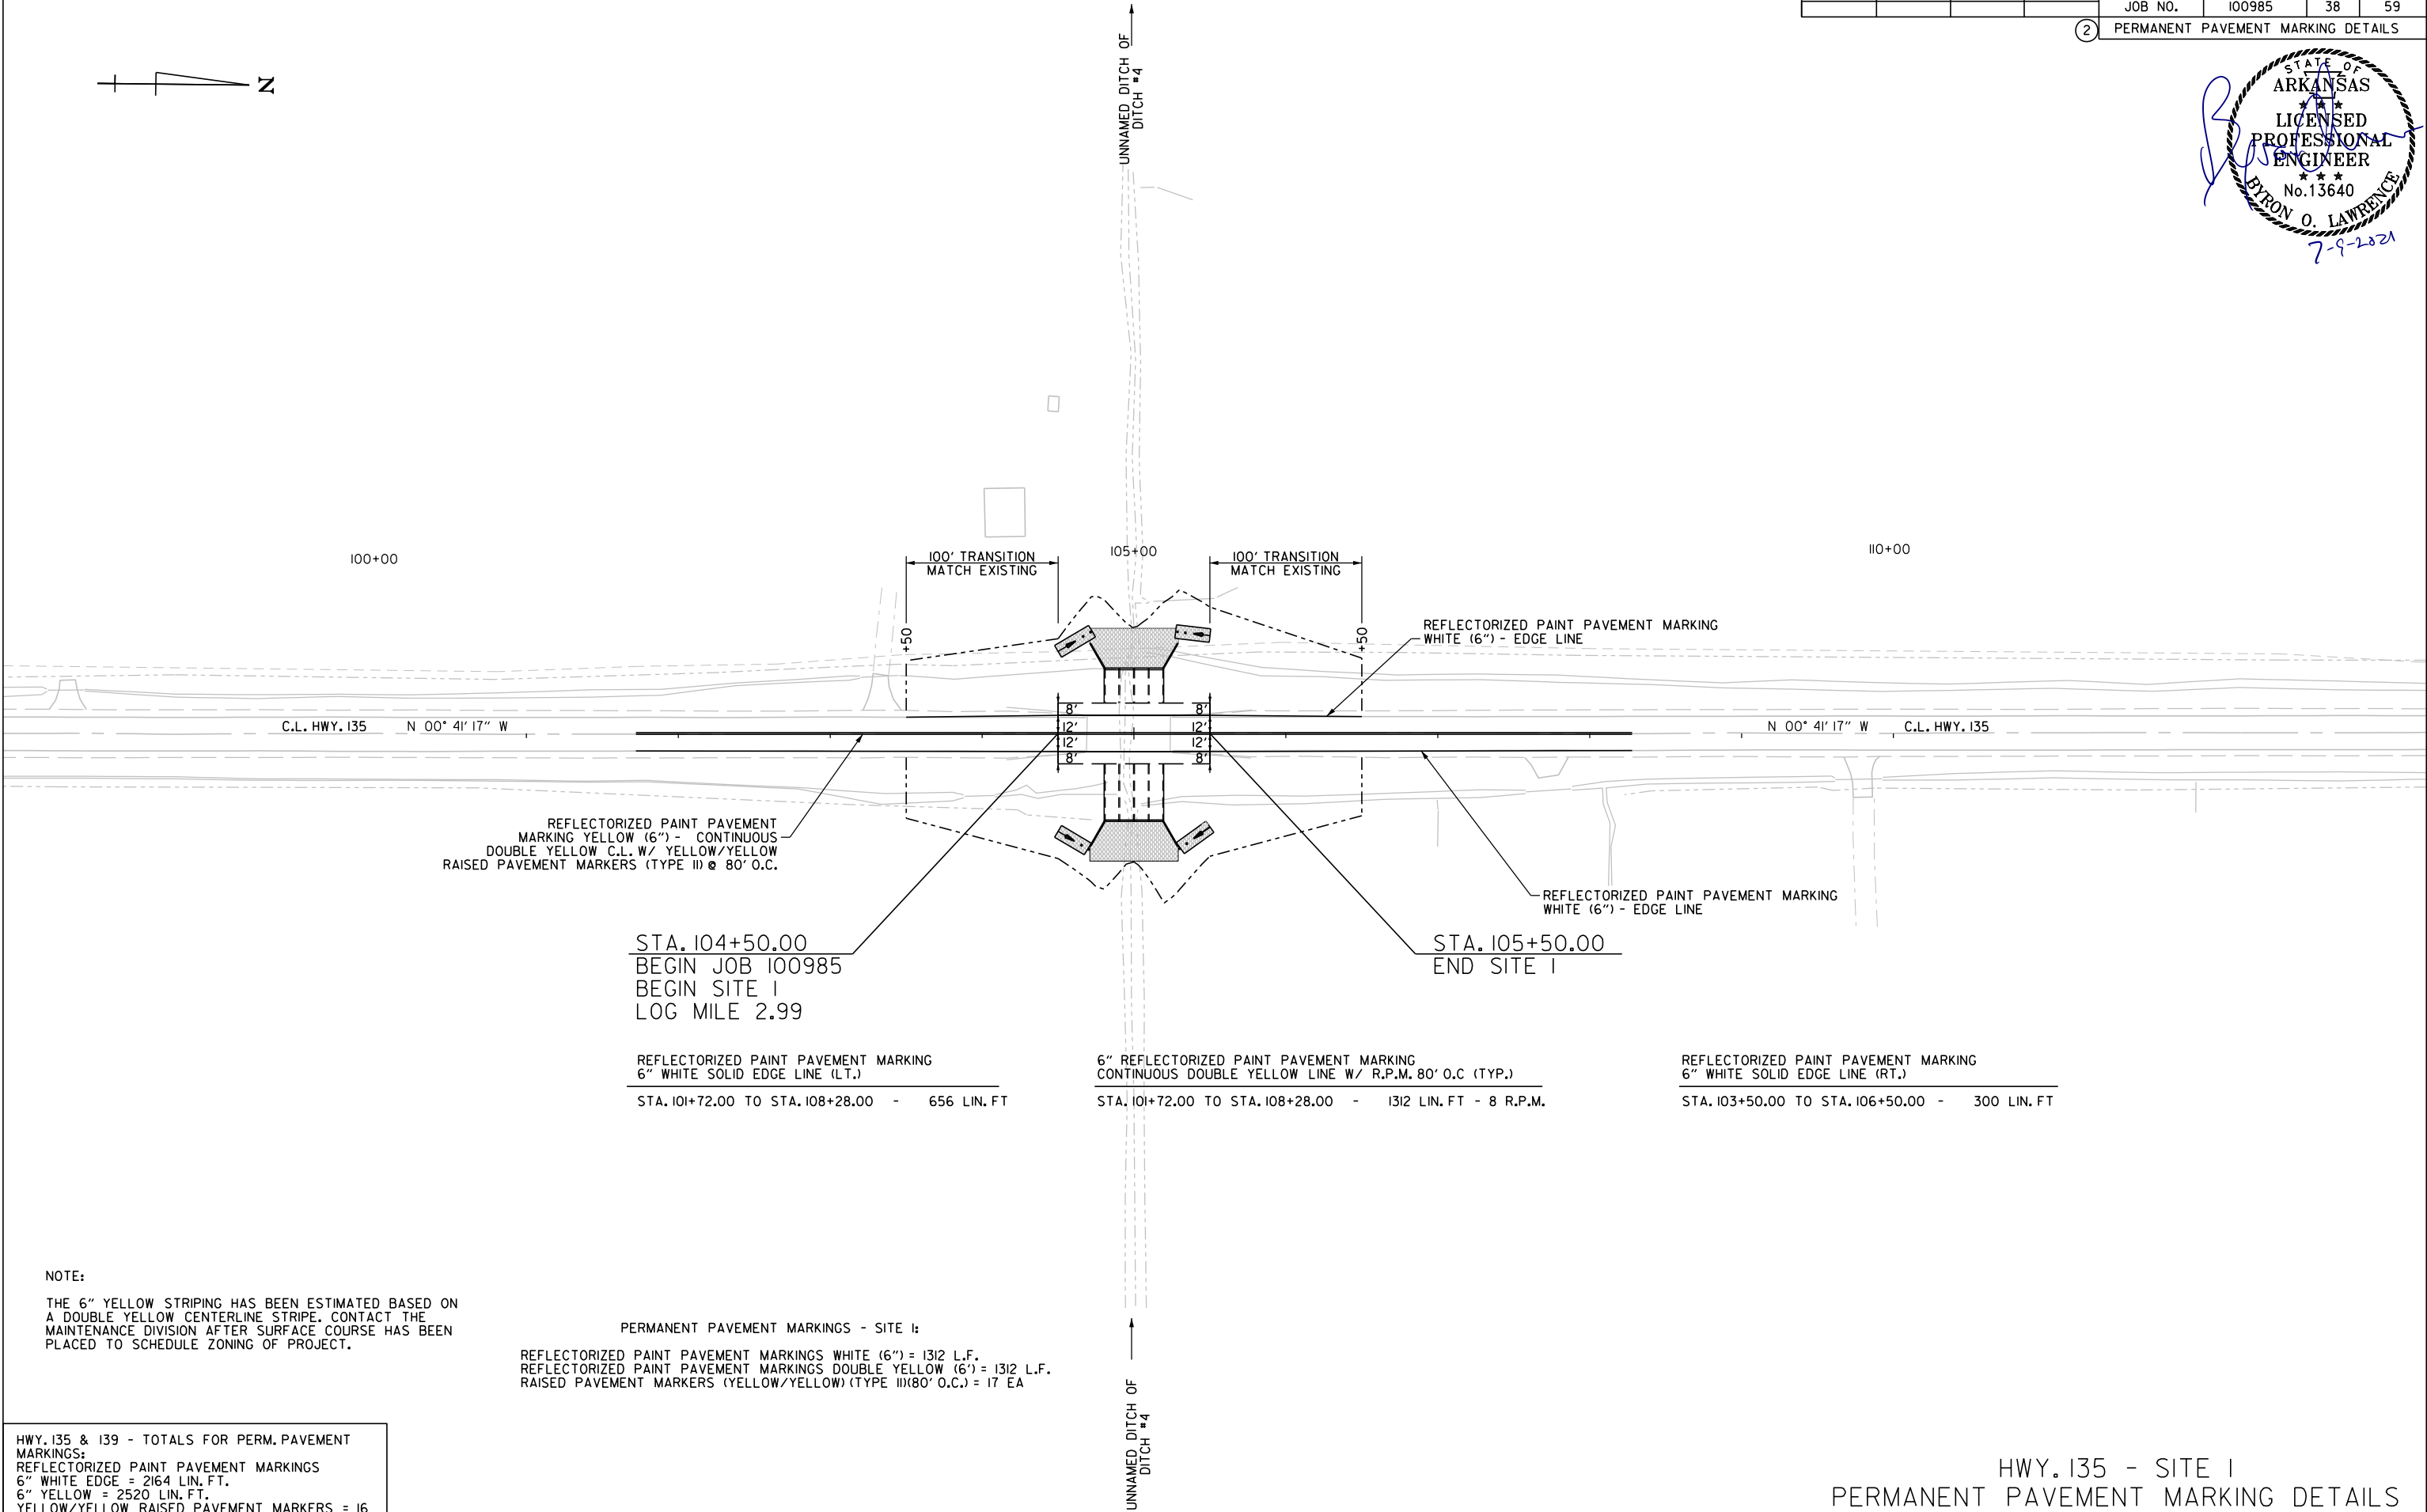

REFLECTORIZED PAINT PAVEMENT MARKING YELLOW (6") - CONTINUOUS DOUBLE YELLOW C.L. W/ YELLOW/YELLOW RAISED PAVEMENT MARKERS (TYPE II) @ 80' O.C.

STA. 104+50.00
BEGIN JOB 100985
BEGIN SITE I
LOG MILE 2.99

REFLECTORIZED PAINT PAVEMENT MARKING
6" WHITE SOLID EDGE LINE (LT.)
STA. 101+72.00 TO STA. 108+28.00 - 656 LIN. FT

6" REFLECTORIZED PAINT PAVEMENT MARKING
CONTINUOUS DOUBLE YELLOW LINE W/ R.P.M. 80' O.C (TYP.)
STA. 101+72.00 TO STA. 108+28.00 - 1312 LIN. FT - 8 R.P.M.

REFLECTORIZED PAINT PAVEMENT MARKING
6" WHITE SOLID EDGE LINE (RT.)
STA. 103+50.00 TO STA. 106+50.00 - 300 LIN. FT

NOTE:
THE 6" YELLOW STRIPING HAS BEEN ESTIMATED BASED ON A DOUBLE YELLOW CENTERLINE STRIPE. CONTACT THE MAINTENANCE DIVISION AFTER SURFACE COURSE HAS BEEN PLACED TO SCHEDULE ZONING OF PROJECT.


PERMANENT PAVEMENT MARKINGS - SITE I:
REFLECTORIZED PAINT PAVEMENT MARKINGS WHITE (6") = 1312 L.F.
REFLECTORIZED PAINT PAVEMENT MARKINGS DOUBLE YELLOW (6") = 1312 L.F.
RAISED PAVEMENT MARKERS (YELLOW/YELLOW) (TYPE II) (80' O.C.) = 17 EA

HWY. 135 & 139 - TOTALS FOR PERM. PAVEMENT MARKINGS:
REFLECTORIZED PAINT PAVEMENT MARKINGS
6" WHITE EDGE = 2164 LIN. FT.
6" YELLOW = 2520 LIN. FT.
YELLOW/YELLOW RAISED PAVEMENT MARKERS = 16

HWY. 135 - SITE I
PERMANENT PAVEMENT MARKING DETAILS

K:\GIS\Bldg\7/18/2021 5:05:24 PM
WORKSPACE: ARDOT
\\LIT\TARIF\Sub\mbooker-corp.com\111\Herock\Projects\ARDOT_174446_100985_Hwy 135 & 139 Strs & Apprs\Design\Civil\Drawings\100985_08_PM_SITE\01.dgn
REVISED DATE: \$*REVIDATE\$*

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
						JOB NO.	100985	40 59
2 PERMANENT PAVEMENT MARKING DETAILS								

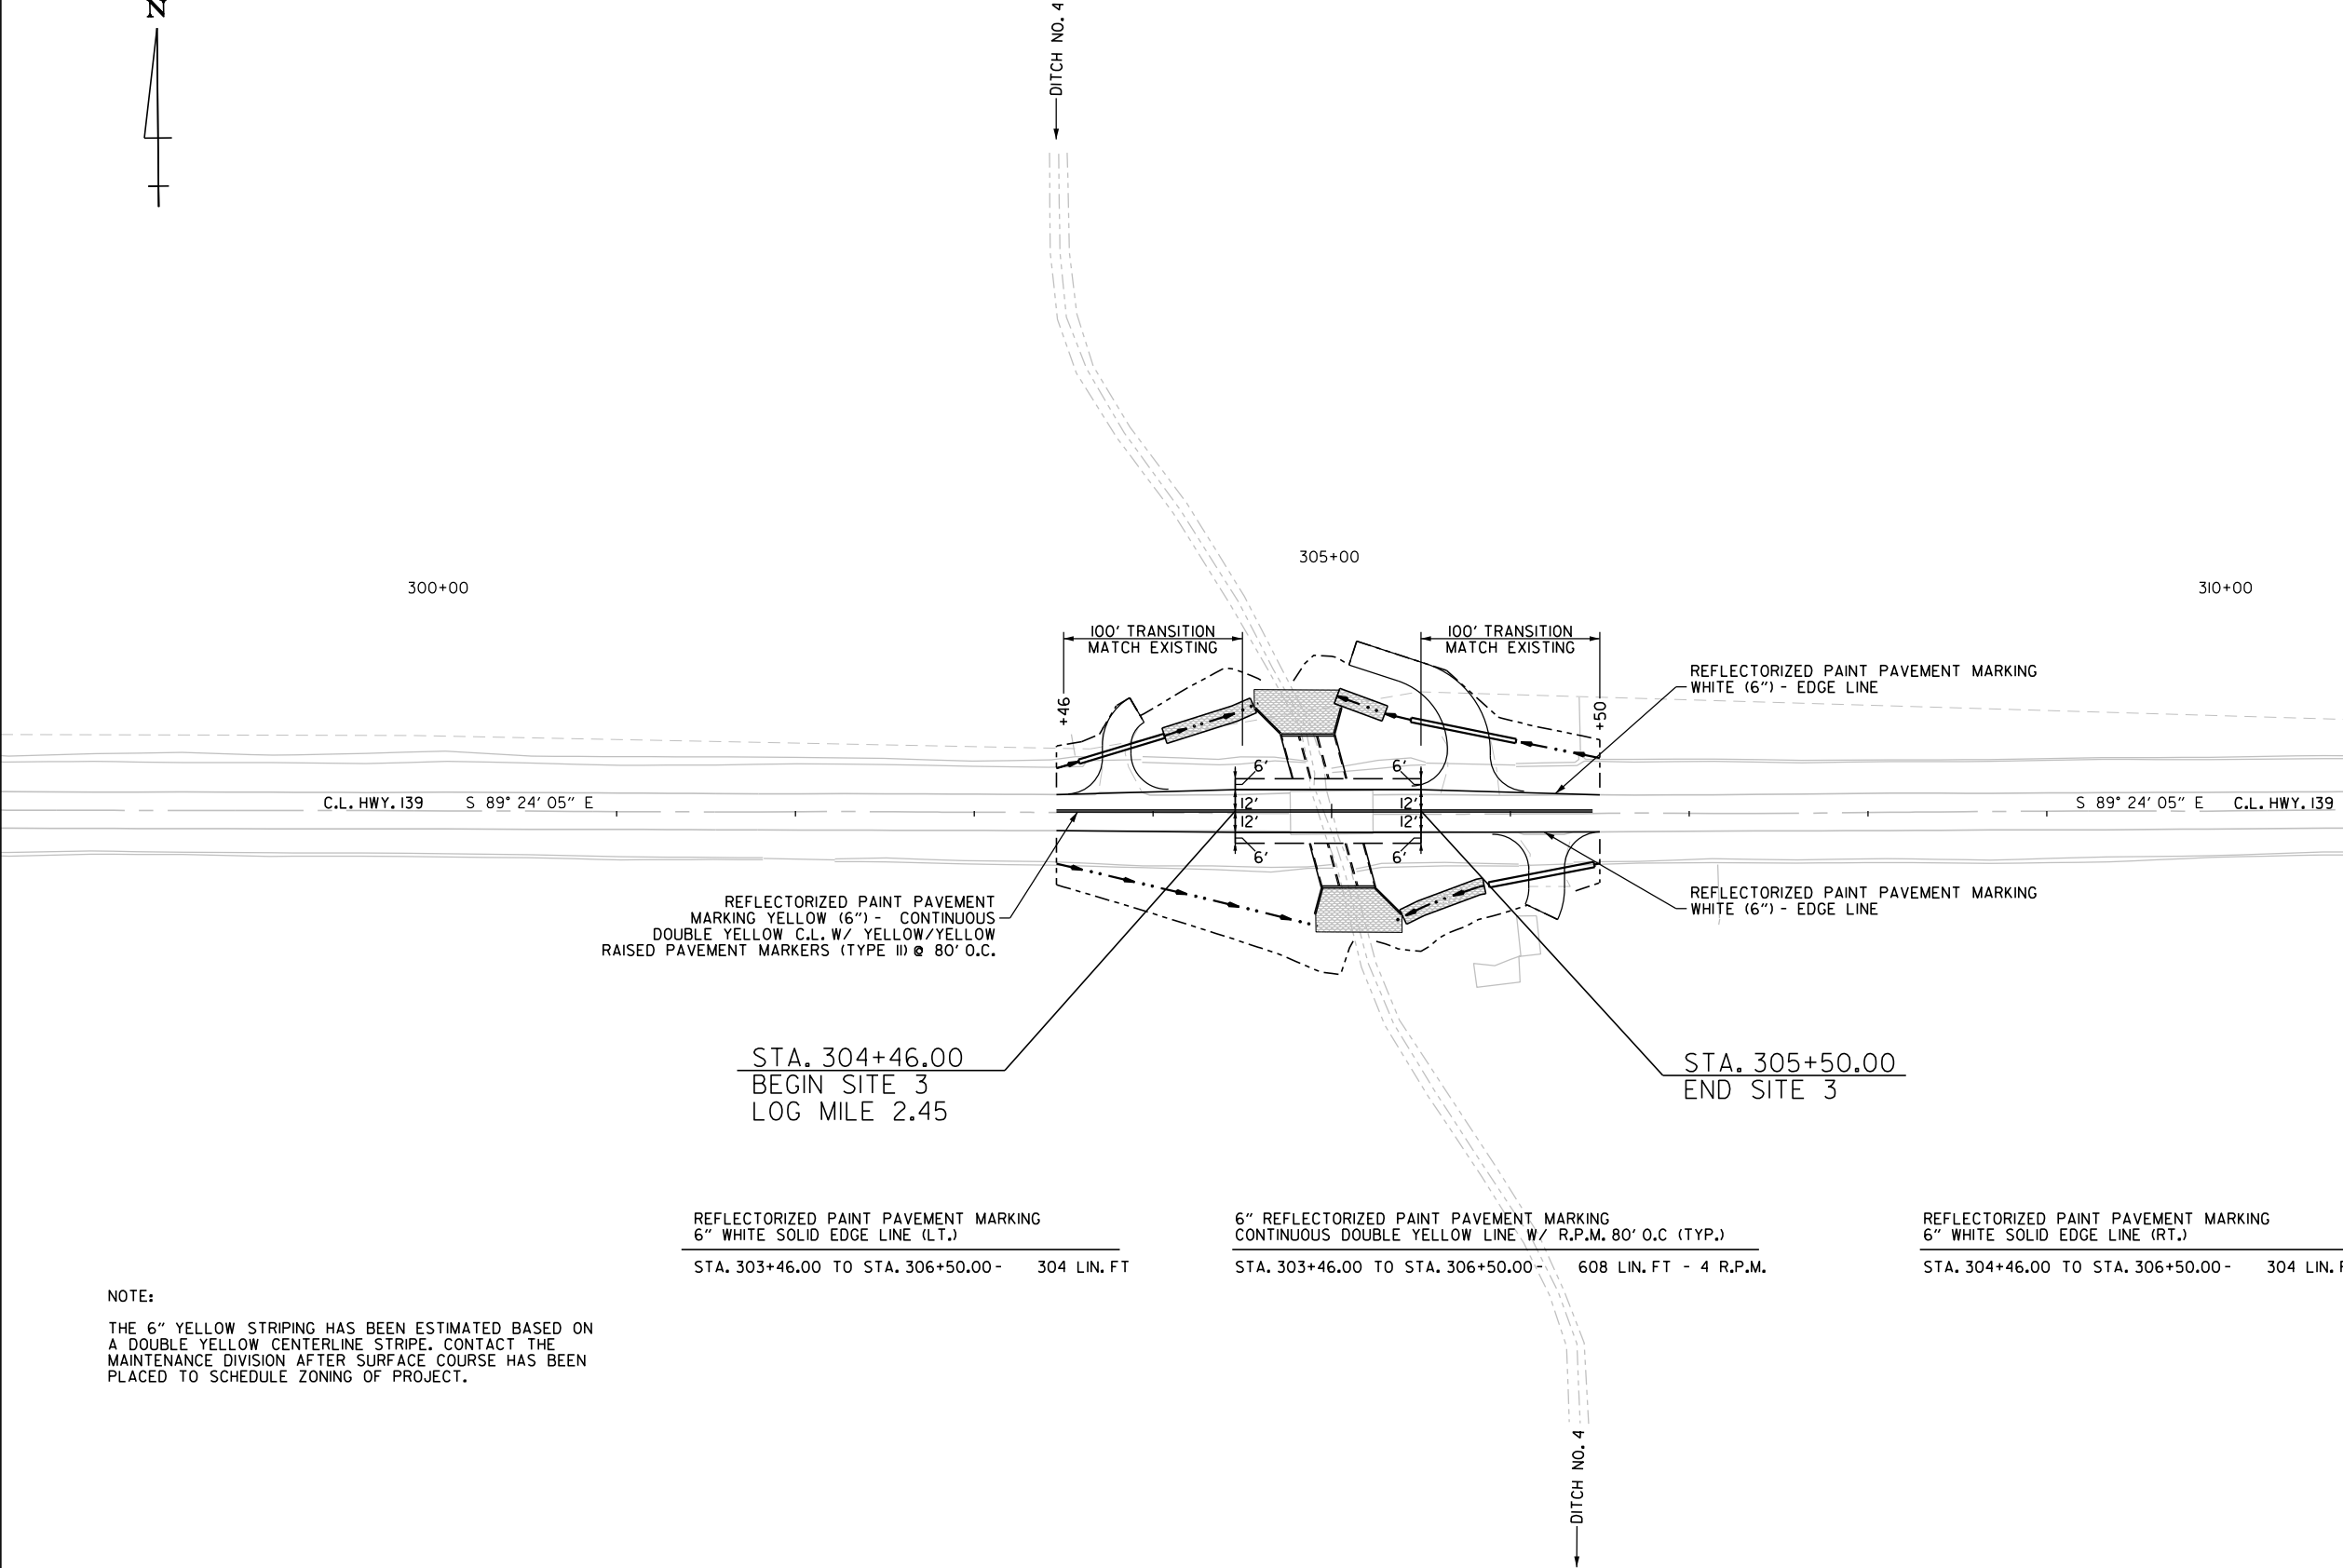

NOTE:
THE 6" YELLOW STRIPING HAS BEEN ESTIMATED BASED ON A DOUBLE YELLOW CENTERLINE STRIPE. CONTACT THE MAINTENANCE DIVISION AFTER SURFACE COURSE HAS BEEN PLACED TO SCHEDULE ZONING OF PROJECT.

REFLECTORIZED PAINT PAVEMENT MARKING 6" WHITE SOLID EDGE LINE (LT.)	6" REFLECTORIZED PAINT PAVEMENT MARKING CONTINUOUS DOUBLE YELLOW LINE W/ R.P.M. 80' O.C (TYP.)	REFLECTORIZED PAINT PAVEMENT MARKING 6" WHITE SOLID EDGE LINE (RT.)
STA. 303+46.00 TO STA. 306+50.00 - 304 LIN. FT	STA. 303+46.00 TO STA. 306+50.00 - 608 LIN. FT - 4 R.P.M.	STA. 304+46.00 TO STA. 306+50.00 - 304 LIN. FT

PERMANENT PAVEMENT MARKINGS - SITE 3:

REFLECTORIZED PAINT PAVEMENT MARKINGS WHITE (6") = 608 L.F.
REFLECTORIZED PAINT PAVEMENT MARKINGS DOUBLE YELLOW (6") = 608 L.F.
RAISED PAVEMENT MARKERS (YELLOW/YELLOW) (TYPE III) (80' O.C.) = 4 EA

HWY. 135 & 139 - TOTALS FOR PERM. PAVEMENT MARKINGS:
REFLECTORIZED PAINT PAVEMENT MARKINGS
6" WHITE EDGE = 2164 LIN. FT.
6" YELLOW = 2520 LIN. FT.
YELLOW/YELLOW RAISED PAVEMENT MARKERS = 16

HWY. 139 - SITE 3
PERMANENT PAVEMENT MARKING DETAILS

K:\135\139\135 & 139 - TOTALS FOR PERM. PAVEMENT MARKINGS.dgn
7/18/2021 5:05:25 PM
WORKSPACE: ARDOT\174446\100985.Hwy 135 & 139 Strs & Apprs\Design\Civil\Drawings\100985_08_PM_SITE3_01.dgn
LIT: TARIFF, Subr, mbocker corp.com\littariff\herock\Projects\ARDOT\174446\100985.Hwy 135 & 139 Strs & Apprs\Design\Civil\Drawings\100985_08_PM_SITE3_01.dgn
REVISED DATE: **REDATE**

Byron O. Lawrence, 1/9/2023 2:50:27 PM
WORKSPACE: ARDOT
\\LITFARF5\lbr.mbakker-corp.com\l1+herock\Projects\ARDOT_174446_100985_Hwy 135 & 139 Strs & Apprs\Design\Civil\Drawings\100985_08_QTY_0.dgn
REVISED DATE: **REVE DATE**

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		100985	41	59

2 QUANTITY SHEETS

SIGN NUMBER	DESCRIPTION	SIGN SIZE	STAGE 1	STAGE 2	STAGE 3	END OF JOB	MAXIMUM NUMBER REQUIRED	TOTAL SIGNS REQUIRED		VERTICAL PANELS	TRAFFIC DRUMS	BARRICADES (TYPE III)		FURNISHING & INSTALLING PRECAST CONC. BARRIER	TEMPORARY IMPACT ATTENUATION BARRIER	TEMP.IMPACT ATTEN.BARR. (REPAIR)
								NO.	SQ. FT.			EACH	LIN. FT.			
			RIGHT	LEFT												
W20-1	ROAD WORK 1500 FT.	36"x36"	6	LIN. FT. - EACH			6	6	54.0							
W20-1	ROAD WORK 1000 FT.	36"x36"	6	6	6		6	6	54.0							
W20-1	ROAD WORK 500 FT.	36"x36"	6	6	6		6	6	54.0							
G20-2	END ROAD WORK	36"x18"	6	6	6		6	6	27.0							
W1-4AR	REVERSE CURVE RT.	36"x36"		2			2	2	18.0							
W1-4AL	REVERSE CURVE LT.	36"x36"		2			2	2	18.0							
W13-1	SPEED LIMIT (ADVISORY)	18"x18"		4			4	4	9.0							
R11-2	ROAD CLOSED	48"x30"	6	2	2		6	6	60.0							
R11-4	ROAD CLOSED TO THRU TRAFFIC	60"x30"	5				5	5	62.5							
M1-5AR	STATE ROUTE	30"x24"	23				23	23	115.0							
M3-1	NORTH DIRECTION	24"x12"	10				10	10	20.0							
M3-3	SOUTH DIRECTION	24"x12"	13				13	13	26.0							
M4-9	DETOUR	30"x24"	3				3	3	15.0							
M4-9R	DETOUR RT.	30"x24"	12				12	12	60.0							
M4-9L	DETOUR LT.	30"x24"	9				9	9	45.0							
W1-6	LARGE ARROW	48"x24"		2	2		2	2	16.0							
W1-8	CHEVRONS	18"x24"		16			16	16	48.0							
R4-1	DO NOT PASS	24"x30"	4	4	4		4	4	20.0							
W21-5a	RIGHT SHOULDER CLOSED	36"x36"	4	4	4		4	4	36.0							
	VERTICAL PANELS		6		6		6			6						
	TRAFFIC DRUMS		7	12	7		12				12					
	TYPE III BARRICADE-RT. (8')		9				9					72				
	TYPE III BARRICADE-LT. (8')		9				9						72			
	TYPE III BARRICADE-RT. (16')		1	1	1		1					16				
	TYPE III BARRICADE-LT. (16')		1	1	1		1						16			
	FURNISHING AND INSTALLING PRECAST CONCRETE BARRIER			186			186							186		
	TEMPORARY IMPACT ATTENUATION BARRIER			2			2								2	
	TEMPORARY IMPACT ATTENUATION BARRIER (REPAIR)			2			2									2
TOTALS:									757.5	6	12	88	88	186	2	2

NOTES: THIS IS A LOW TRAFFIC VOLUME ROAD AS DEFINED IN SECTION 604.03, STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION.

THE CONTRACTOR MAY CHOOSE SITE 2 OR SITE 3 TO WORK IN FIRST. ADVANCE WARNING SIGNS AND DETOUR SIGNS WILL BE RELOCATED UPON COMPLETION OF THE FIRST SITE CHOSEN FOR CONSTRUCTION WITH A DETOUR.

* QUANTITY ESTIMATED.
SEE SECTION 104.03 OF THE STD. SPECS.
TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER.

DRIVEWAYS & TURNOUTS

STATION	SIDE	LOCATION	WIDTH	ACHM SURFACE COURSE (1/2") 220 LBS. PER SQ. YD. (PG 64-22)		AGGREGATE BASE COURSE (CLASS 7)	SIDE DRAINS			STANDARD DRAWINGS
				SQ. YD.	TON		24"	30"	36"	
			FEET			TON	LIN. FT.			
204+31	RT.	HWY. 135 - SITE 2 (CO. RD. 864)	20	105.37	11.59	136.36			70	PCC-1, PCM-1, PCP-1, PCP-2, PCP-3
205+66	RT.	HWY. 135 - SITE 2	16	24.73	2.72	61.43	60			PCC-1, PCM-1, PCP-1, PCP-2, PCP-3
205+91	LT.	HWY. 135 - SITE 2	24	35.40	3.89	98.46	60			PCC-1, PCM-1, PCP-1, PCP-2, PCP-3
303+80	LT.	HWY. 139 - SITE 3	16	30.43	3.35	40.58		50		PCC-1, PCM-1, PCP-1, PCP-2, PCP-3
305+77	LT.	HWY. 139 - SITE 3	24	42.88	4.72	144.62		60		PCC-1, PCM-1, PCP-1, PCP-2, PCP-3
306+20	RT.	HWY. 139 - SITE 3	20	36.65	4.03	42.75		60		PCC-1, PCM-1, PCP-1, PCP-2, PCP-3
		TEMPORARY DRIVES				60.00				
TOTALS:				275.46	30.30	584.20	120	110	130	

BASIS OF ESTIMATE:
ACHM SURFACE COURSE (1/2") 95.0% MIN. AGGR.....5.0% ASPHALT BINDER
MAXIMUM NUMBER OF GYRATIONS = 115 FOR PG 64-22

* QUANTITY ESTIMATED
SEE SECTION 104.03 OF THE STD. SPECS.
TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER.

NOTE: FOR R.C. PIPE CULVERT INSTALLATIONS USE TYPE 3 BEDDING UNLESS OTHERWISE SPECIFIED.
NOTE: FOR C.M. PIPE CULVERT INSTALLATIONS USE TYPE 2 BEDDING UNLESS OTHERWISE SPECIFIED.

BENCH MARKS

STATION	LOCATION	BENCH MARKS
		EACH
101+00	HWY. 135 - SITE 1	1
203+00	HWY. 135 - SITE 2	1
303+00	HWY. 139 - SITE 3	1

NOTE: SHOWN FOR INFORMATION ONLY. BENCH MARKS SHALL BE FURNISHED AND PLACED BY STATE FORCES.

REMOVAL AND DISPOSAL OF CULVERTS

STATION	DESCRIPTION	PIPE CULVERTS
		EACH
204+31	HWY. 135 - RT. - SITE 2 - SIDE DRAIN	1
205+66	HWY. 135 - RT. - SITE 2 - SIDE DRAIN	1
205+91	HWY. 135 - LT. - SITE 2 - SIDE DRAIN	1
303+80	HWY. 139 - LT. - SITE 3 - SIDE DRAIN	1
305+77	HWY. 139 - LT. - SITE 3 - SIDE DRAIN	1
306+20	HWY. 139 - RT. - SITE 3 - SIDE DRAIN	1
TOTAL:		6

NOTE: QUANTITIES SHOWN ABOVE SHALL INCLUDE REMOVAL & DISPOSAL OF ALL HEADWALLS AND FLARED END SECTIONS IF APPLICABLE.

SELECTED PIPE BEDDING

LOCATION	SELECTED PIPE BEDDING
	CU.YD.
ENTIRE PROJECT TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER	100
TOTAL:	100

NOTE: QUANTITY ESTIMATED.
SEE SECTION 104.03 OF THE STD. SPECS.

CLEARING AND GRUBBING

STATION	STATION	LOCATION	CLEARING	GRUBBING
			STATION	
101+00	109+00	HWY. 135 - SITE 1	8	8
203+00	207+00	HWY. 135 - SITE 2	4	4
303+00	307+00	HWY. 139 - SITE 3	4	4
TOTALS:			16	16

COLD MILLING ASPHALT PAVEMENT

STATION	STATION	LOCATION	AVG. WIDTH	COLD MILLING ASPHALT PAVEMENT
			FEET	SQ. YD.
103+50.00	104+50.00	HWY. 135 - SITE 1	28.00	311.11
105+50.00	106+50.00	HWY. 135 - SITE 1	28.00	311.11
203+50.00	204+50.00	HWY. 135 - SITE 2	28.00	311.11
205+50.00	206+50.00	HWY. 135 - SITE 2	28.00	311.11
303+46.00	304+46.00	HWY. 139 - SITE 3	20.00	222.22
305+50.00	306+50.00	HWY. 139 - SITE 3	20.00	222.22
TOTAL:				1688.88

CONTRACTOR TO STOCKPILE MILLINGS AT 304 EAST STATE ST., CARAWAY, AR 72419

CONSTRUCTION PAVEMENT MARKINGS AND PERMANENT PAVEMENT MARKINGS

DESCRIPTION	STAGE 2	STAGE 3	END OF JOB	REMOVAL OF PERMANENT PAVEMENT MARKINGS	CONSTRUCTION PAVEMENT MARKINGS	REMOVABLE CONSTRUCTION PAVEMENT MARKINGS	RAISED PAVEMENT MARKERS	REFLECTORIZED PAINT PAVEMENT MARKING	
							TYPE II	6"	
	(YELLOW/YELLOW)	WHITE	YELLOW						
					LIN. FT.		LIN. FT.	EACH	
REMOVAL OF PERMANENT PAVEMENT MARKINGS	992			992					
CONSTRUCTION PAVEMENT MARKINGS	2509	1992			4501				
REMOVABLE CONSTRUCTION PAVEMENT MARKINGS	868					868			
RAISED PAVEMENT MARKERS TYPE II (YELLOW/YELLOW)	23	17	16				56		
REFLECTORIZED PAINT PAVEMENT MARKING WHITE (6")			2164					2164	
REFLECTORIZED PAINT PAVEMENT MARKING YELLOW (6")			2520						2520
TOTALS:				992	4501	868	56	2164	2520

NOTE: THIS IS A LOW TRAFFIC VOLUME ROAD AS DEFINED IN SECTION 604.03, STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION.

QUANTITY SHEETS



REMOVAL AND DISPOSAL OF ITEMS

STATION	STATION	LOCATION	GUARDRAIL
			LIN. FT.
104+16	104+68	HWY. 135 - SITE 1 - LT. OF CL.	53
105+25	105+78	HWY. 135 - SITE 1 - LT. OF CL.	53
104+16	104+68	HWY. 135 - SITE 1 - RT. OF CL.	53
105+25	105+77	HWY. 135 - SITE 1 - RT. OF CL.	53
204+52	204+76	HWY. 135 - SITE 2 - LT. OF CL.	25
204+60	204+77	HWY. 135 - SITE 2 - LT. OF CL.	18
205+26	205+51	HWY. 135 - SITE 2 - RT. OF CL.	26
205+25	205+50	HWY. 135 - SITE 2 - RT. OF CL.	25
TOTAL:			306

NOTE: THE QUANTITY SHOWN ABOVE FOR THE REMOVAL AND DISPOSAL OF GUARDRAIL SHALL INCLUDE THE REMOVAL AND DISPOSAL OF ALL GUARDRAIL TERMINALS AND TERMINAL ANCHOR POSTS.


B:\CPL\Lowrprcs_1\9\2023 250:28 PM
\\LIT\AR\Subr\mboker-corp.com\lit\herock\Projects\AR00T_174446_100985 Hwy 135 & 139 Strs & Apprs\Design\Civil\Drawings\R00985_08_QTY_0.dgn
WORKSPACE: AR00T
REVISD DATE: **REVISD DATE**

REMOVAL OF EXISTING BRIDGE STRUCTURE			
STATION	STATION	LOCATION	LUMP SUM
104+69	105+24	HWY. 135 - SITE 1	1.00
204+77	205+25	HWY. 135 - SITE 2	1.00
304+77	305+23	HWY. 139 - SITE 3	1.00

ACHM PATCHING OF EXISTING ROADWAY	
DESCRIPTION	TON
ENTIRE PROJECT - TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER	40
TOTAL:	40
NOTE: QUANTITY ESTIMATED. SEE SECTION 104.03 OF THE STD. SPECS.	

SOIL STABILIZATION			
STATION	STATION	LOCATION/DESCRIPTION	SOIL STABILIZATION TON
ENTIRE	PROJECT	TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER	50
TOTAL:			50
QUANTITY ESTIMATED: SEE SECTION 104.03 OF THE STD. SPECIFICATIONS			

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		100985	42	59
2 QUANTITY SHEETS								



STRUCTURES										
STATION	DESCRIPTION	SPAN	HEIGHT	LENGTH	CLASS S CONCRETE - ROADWAY	REINF. STEEL- ROADWAY (GRADE 60)	UNCL. EXC. FOR STR.- ROADWAY	SOLID SODDING	WATER	STD. DWG. NOS.
					CU.YD.	POUND	CU.YD.	SQ.YD.	M.GAL.	
STRUCTURES OVER 20' - 0" SPAN										
105+00	HWY. 135 - SITE 1- QUADRUPLE R.C. BOX CULVERT	9	7	101	377.49	45444	172	34	0.43	SPECIAL DETAILS, PBC-1, RCB-1, RCB-2
205+00	HWY. 135 - SITE 2 - QUADRUPLE R.C. BOX CULVERT	12	7	86	478.76	56903	234	40	0.50	SPECIAL DETAILS, PBC-1, RCB-1, RCB-2
304+98	HWY. 139 - SITE 3 - TRIPLE R.C. BOX CULVERT	9	6	89	254.00	32546	126	29	0.37	SPECIAL DETAILS, PBC-1, RCB-1, RCB-2
TOTALS:					1110.25	134893	532	103	1.30	
BASIS OF ESTIMATE:										
WATER.....12.6 GAL. / SQ. YD. OF SOLID SODDING										

STATION	STATION	LOCATION / DESCRIPTION	UNCLASSIFIED EXCAVATION	COMPACTED EMBANKMENT
			CU. YD.	
ENTIRE	PROJECT	HWY. 135 - SITE 1- STAGE 1- DETOUR	54	1860
ENTIRE	PROJECT	HWY. 135 - SITE 1- STAGE 2 - MAIN LNS.- BOX VOL.	399	1198
ENTIRE	PROJECT	HWY. 135 - SITE 1- STAGE 3 - OBLIT. DETOUR	1946	
ENTIRE	PROJECT	HWY. 135 - SITE 2 - MAIN LNS.- BOX VOL.	1540	495
ENTIRE	PROJECT	HWY. 139 - SITE 3 - MAIN LANES - BOX VOL.	2363	556
ENTIRE	PROJECT	HWY. 139 - SITE 3 - STAGE 2 - UNDERCUT	200	
ENTIRE	PROJECT	DRIVEWAYS		365
TOTALS:			6502	4474
NOTE: EARTHWORK QUANTITIES SHOWN ABOVE SHALL BE PAID AS PLAN QUANTITY.				

BASE AND SURFACING																									
STATION	STATION	LOCATION	LENGTH	AGGREGATE BASE COURSE (CLASS 7)		TACK COAT			ACHM BASE COURSE (1 1/2")				ACHM BINDER COURSE (1")				ACHM SURFACE COURSE (1/2")								
				TON / STATION	TON	(0.05 GAL. PER SQ. YD.)		TOTAL GALLONS	AVG. WID. FEET	SQ.YD.	POUND / SQ.YD.	PG 64-22 TON	AVG. WID. FEET	SQ.YD.	POUND / SQ.YD.	PG 64-22 TON	AVG. WID. FEET	SQ.YD.	POUND / SQ.YD.	PG 64-22 TON	AVG. WID. FEET	SQ.YD.	POUND / SQ.YD.	PG 64-22 TON	TOTAL PG 64-22 TON
						TOTAL WID. FEET	SQ.YD.																		
MAIN LANES																									
103+50.00	104+50.00	HWY. 135 - SITE 1- TRANSITION	100.00	119.50	119.50																				
104+50.00	105+50.00	HWY. 135 - SITE 1- MAIN LANES	100.00	131.50	131.50	73.50	816.67	40.83	24.79	275.44	550.00	75.75	24.46	271.78	330.00	44.84	24.25	269.44	220.00	29.64	34.00	377.78	220.00	41.56	41.56
105+50.00	106+50.00	HWY. 135 - SITE 1- TRANSITION	100.00	119.50	119.50																34.00	377.78	220.00	41.56	41.56
203+50.00	204+50.00	HWY. 135 - SITE 2 - TRANSITION	100.00	119.50	119.50																34.00	377.78	220.00	41.56	41.56
204+50.00	205+50.00	HWY. 135 - SITE 2 - MAIN LANES	100.00	131.50	131.50	73.50	816.67	40.83	24.79	275.44	550.00	75.75	24.46	271.78	330.00	44.84	24.25	269.44	220.00	29.64	40.00	444.44	220.00	48.89	78.53
205+50.00	206+50.00	HWY. 135 - SITE 2 - TRANSITION	100.00	119.50	119.50																34.00	377.78	220.00	41.56	41.56
303+46.00	304+46.00	HWY. 139 - SITE 3 - TRANSITION	100.00	61.75	61.75																26.00	288.89	220.00	31.78	31.78
304+46.00	305+50.00	HWY. 139 - SITE 3 - MAIN LANES	104.00	123.50	128.44	73.50	849.33	42.47	24.79	286.46	550.00	78.78	24.46	282.65	330.00	46.64	24.25	280.22	220.00	30.82	28.00	323.56	220.00	35.59	66.41
305+50.00	306+50.00	HWY. 139 - SITE 3 - TRANSITION	100.00	61.75	61.75																26.00	288.89	220.00	31.78	31.78
21+22.09	22+48.64	HWY. 135 - SITE 1- TEMP. DETOUR - GORE	126.55	61.25	77.51								8.44	118.68	330.00	19.58					8.29	116.57	220.00	12.82	12.82
22+48.64	23+50.00	HWY. 135 - SITE 1- TEMP. DETOUR - 24'	101.36	138.25	140.13								24.29	273.56	330.00	45.14					24.00	270.29	220.00	29.73	29.73
23+50.00	24+50.00	HWY. 135 - SITE 1- TEMP. DETOUR - 28'	100.00	170.25	170.25								28.29	314.33	330.00	51.86					28.00	311.11	220.00	34.22	34.22
24+50.00	25+58.46	HWY. 135 - SITE 1- TEMP. DETOUR - 24'	108.46	138.25	149.95								24.29	292.72	330.00	48.30					24.00	289.23	220.00	31.82	31.82
25+58.46	26+96.36	HWY. 135 - SITE 1- TEMP. DETOUR - GORE	137.90	58.75	81.02								7.87	120.59	330.00	19.90					7.72	118.29	220.00	13.01	13.01
ADDITIONAL FOR SUPERELEVATION																									
22+47.93	25+57.93	HWY. 135 - SITE 1- TEMP. DETOUR	310.00	3.50	10.85																				
TOTALS:					1622.65		2482.67	124.13		837.34		230.28		1946.09		321.10		819.10		90.10		4406.83		484.77	574.87
BASIS OF ESTIMATE: ACHM SURFACE COURSE (1/2").....95.0% MIN. AGGR.....5.0% ASPHALT BINDER ACHM BINDER COURSE (1").....95.9% MIN. AGGR.....4.1% ASPHALT BINDER ACHM BASE COURSE (1 1/2").....96.1% MIN. AGGR.....3.9% ASPHALT BINDER MAXIMUM NUMBER OF GYRATIONS = 115 FOR PG 64-22 TACK COAT QUANTITIES WERE CALCULATED USING THE EMULSIFIED ASPHALT RATES. REFER TO SS-400-1 FOR THE RESIDUAL ASPHALT APPLICATION RATES.																									
STONE BACKFILL, DUMPED RIPRAP, AND FILTER B																									

EROSION CONTROL															
STATION	STATION	LOCATION	PERMANENT EROSION CONTROL					TEMPORARY EROSION CONTROL							
			SEEDING	LIME	MULCH COVER	WATER	SECOND SEEDING APPLICATION	TEMPORARY SEEDING	MULCH COVER	WATER	ROCK DITCH CHECKS (E-6)	SILT FENCE (E-11)	SEDIMENT BASIN (E-14)	OBLITERATION OF SEDIMENT BASIN	*SEDIMENT REMOVAL & DISPOSAL
			ACRE	TON	ACRE	M.GAL.	ACRE	ACRE	ACRE	M.GAL.	CU.YD.	LIN.FT.	CU.YD.	CU.YD.	CU.YD.
ENTIRE	PROJECT	CLEARING AND GRUBBING - HWY. 135 - SITE 1						2.12	2.12	43.2		1405			52
ENTIRE	PROJECT	STAGE 1- HWY. 135 - SITE 1						2.12	2.12	43.2					
ENTIRE	PROJECT	STAGE 3 - HWY. 135 - SITE 1	1.06	2.12	1.06	108.1	1.06								
ENTIRE	PROJECT	CLEARING AND GRUBBING - HWY. 135 - SITE 2						2.00	2.00	40.8		1290			48
ENTIRE	PROJECT	STAGE 1- HWY. 135 - SITE 2						2.00	2.00	40.8					
ENTIRE	PROJECT	STAGE 2 - HWY. 135 - SITE 2	1.00	2.00	1.00	102.0	1.00								
ENTIRE	PROJECT	CLEARING AND GRUBBING - HWY. 135 - SITE 3						2.00	2.00	40.8		1605			59
ENTIRE	PROJECT	STAGE 1 - HWY. 135 - SITE 3						2.00	2.00	40.8					
ENTIRE	PROJECT	STAGE 2 - HWY. 135 - SITE 3	1.00	2.00	1.00	102.0	1.00								
*ENTIRE PROJECT TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER.			1.00	2.00	1.00	102.0	1.00	2.00	2.00	40.8	15	430	133	133	149
TOTALS:			4.06	8.12	4.06	414.1	4.06	14.24	14.24	290.4	15	4730	133	133	308
BASIS OF ESTIMATE: LIME 2 TONS / ACRE OF SEEDING WATER.....102.0 M.G. / ACRE OF SEEDING WATER.....20.4 M.G. / ACRE OF TEMPORARY SEEDING ROCK DITCH CHECKS.....3 CU.YD./LOCATION															
NOTE: THE TEMPORARY EROSION CONTROL DEVICES SHOWN ABOVE AND ON THE PLANS SHALL BE INSTALLED IN SUCH A SEQUENCE AS TO DETER EROSION AND SEDIMENTATION ON U.S. WATERWAYS AS EXPLAINED BY THE NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT.															
*QUANTITIES ESTIMATED. SEE SECTION 104.03 OF THE STD. SPECS.															

ASPHALT CONCRETE PATCHING FOR MAINTENANCE OF TRAFFIC	
LOCATION	TON
ENTIRE PROJECT - TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER	2
TOTALS:	2
BASIS OF ESTIMATE: ASPHALT CONCRETE PATCHING FOR MAINTENANCE OF TRAFFIC..25 TON/MILE TACK COAT FOR MAINTENANCE OF TRAFFIC.....50 GAL./MILE	

STONE BACKFILL, DUMPED RIPRAP, AND FILTER BLANKET		
STATION	STATION	LOCATION
		STONE BACKFILL TONS
		DUMPED RIPRAP CU. YD.
		FILTER BLANKET SQ. YD.
304+85	305+15	HWY. 139 - SITE 3 - STAGE 2 - UNDERCUT
104+50	104+72	RT. OF HWY. 135 - SITE 1
104+50	104+72	LT. OF HWY. 135 - SITE 1
-	105+00	LT. OF HWY. 135 - SITE 1- BOX CULVERT
-	105+00	RT. OF HWY. 135 - SITE 1- BOX CULVERT
105+28	105+50	RT. OF HWY. 135 - SITE 1
105+28	105+50	LT. OF HWY. 135 - SITE 1
-	205+00	LT. OF HWY. 135 - SITE 2 - BOX CULVERT
-	205+00	RT. OF HWY. 135 - SITE 2 - BOX CULVERT
205+28	205+60	LT. OF HWY. 135 - SITE

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
2-2-2023				6	ARK.			
					JOB NO.	100985	43	59

② SUMMARY OF QUANTITIES AND REVISIONS



SUMMARY OF QUANTITIES


ITEM NUMBER	ITEM	QUANTITY	UNIT
201	CLEARING	16	STATION
201	GRUBBING	16	STATION
202	REMOVAL AND DISPOSAL OF PIPE CULVERTS	6	EACH
202	REMOVAL AND DISPOSAL OF GUARDRAIL	306	LIN. FT.
SP & 207	STONE BACKFILL	420	TON
SP, SS, & 210	UNCLASSIFIED EXCAVATION	6502	CU. YD.
SP & 210	COMPACTED EMBANKMENT	4474	CU. YD.
SP & 210	SOIL STABILIZATION	50	TON
SP, SS, & 303	AGGREGATE BASE COURSE (CLASS 7)	2207	TON
SS & 401	TACK COAT	128	GAL.
SP, SS, & 405	MINERAL AGGREGATE IN ACHM BASE COURSE (1 1/2")	221	TON
SP, SS, & 405	ASPHALT BINDER (PG 64-22) IN ACHM BASE COURSE (1 1/2")	9	TON
SP, SS, & 406	MINERAL AGGREGATE IN ACHM BINDER COURSE (1")	308	TON
SP, SS, & 406	ASPHALT BINDER (PG 64-22) IN ACHM BINDER COURSE (1")	13	TON
SP, SS, & 407	MINERAL AGGREGATE IN ACHM SURFACE COURSE (1/2")	575	TON
SP, SS, & 407	ASPHALT BINDER (PG 64-22) IN ACHM SURFACE COURSE (1/2")	30	TON
SP & 412	COLD MILLING ASPHALT PAVEMENT	1689	SQ. YD.
SP, SS, & 414	ASPHALT CONCRETE PATCHING FOR MAINTENANCE OF TRAFFIC	2	TON
SP, SS, & 415	ACHM PATCHING OF EXISTING ROADWAY	40	TON
601	MOBILIZATION	1.00	LUMP SUM
SP & 602	FURNISHING FIELD OFFICE	1	EACH
SP, SS, & 603	MAINTENANCE OF TRAFFIC	1.00	LUMP SUM
SS & 604	SIGNS	758	SQ. FT.
SS & 604	BARRICADES	176	LIN. FT.
SS & 604	TRAFFIC DRUMS	12	EACH
SS & 604	FURNISHING AND INSTALLING PRECAST CONCRETE BARRIER	186	LIN. FT.
604	CONSTRUCTION PAVEMENT MARKINGS	4501	LIN. FT.
604	REMOVABLE CONSTRUCTION PAVEMENT MARKINGS	868	LIN. FT.
604	REMOVAL OF PERMANENT PAVEMENT MARKINGS	992	LIN. FT.
SS & 604	VERTICAL PANELS	6	EACH
SP, SS, & 606	24" SIDE DRAIN	120	LIN. FT.
SP, SS, & 606	30" SIDE DRAIN	110	LIN. FT.
SP, SS, & 606	36" SIDE DRAIN	130	LIN. FT.
SS & 606	SELECTED PIPE BEDDING	100	CU. YD.
620	LIME	8	TON
620	SEEDING	4.06	ACRE
SS & 620	MULCH COVER	18.30	ACRE
620	WATER	705.8	M. GAL.
621	TEMPORARY SEEDING	14.24	ACRE
621	SILT FENCE	4730	LIN. FT.
621	SEDIMENT BASIN	133	CU. YD.
621	OBLITERATION OF SEDIMENT BASIN	133	CU. YD.
621	SEDIMENT REMOVAL AND DISPOSAL	308	CU. YD.
621	ROCK DITCH CHECKS	15	CU. YD.
623	SECOND SEEDING APPLICATION	4.06	ACRE
624	SOLID SODDING	103	SQ. YD.
635	ROADWAY CONSTRUCTION CONTROL	1.00	LUMP SUM
718	REFLECTORIZED PAINT PAVEMENT MARKING WHITE (6")	2164	LIN. FT.
718	REFLECTORIZED PAINT PAVEMENT MARKING YELLOW (6")	2520	LIN. FT.
721	RAISED PAVEMENT MARKERS (TYPE II)	56	EACH
SS & 731	TEMPORARY IMPACT ATTENUATION BARRIER	2	EACH
SS & 731	TEMPORARY IMPACT ATTENUATION BARRIER (REPAIR)	2	EACH
SS & 816	FILTER BLANKET	1553	SQ. YD.
SS & 816	DUMPED RIPRAP	600	CU. YD.
	STRUCTURES OVER 20' SPAN		
205	REMOVAL OF EXISTING BRIDGE STRUCTURE (SITE 1)	1.00	LUMP SUM
205	REMOVAL OF EXISTING BRIDGE STRUCTURE (SITE 2)	1.00	LUMP SUM
205	REMOVAL OF EXISTING BRIDGE STRUCTURE (SITE 3)	1.00	LUMP SUM
801	UNCLASSIFIED EXCAVATION FOR STRUCTURES - ROADWAY	532	CU. YD.
SP, SS, & 802	CLASS S CONCRETE-ROADWAY	1110.25	CU. YD.
SS & 804	REINFORCING STEEL-ROADWAY (GRADE 60)	134893	POUND

REVISIONS

DATE	REVISION	SHEET NUMBER
2/2/2023	REPLACED STANDARD DRAWING TC-3	43

SUMMARY OF QUANTITIES AND REVISIONS

② SURVEY CONTROL DETAILS



Project Name: s100985
Date: 6/25/2019
Coordinate System: ARKANSAS STATE PLANE - NORTH ZONE BASED ON GPS CONTROL, VT AND HZ BASED ON STATIC GPS
Units: U.S. SURVEY FOOT

*Note - Rebar and Cap - Standard - 5/8" Rebar with 2" Aluminum Cap stamped
 *(standard markings common to all caps), or as indicated
 (other markings indicated in the point description of the individual point).
 ALL DISTANCES ARE GROUND.
 USE CAF = 1.0 FOR STAKEOUT FOR THIS PROJECT.
 A PROJECT CAF OF 0.999934396 HAS BEEN USED TO COMPUTE THE ABOVE GROUND COORDINATES.
 THIS CAF IS INTENDED FOR USE WITHIN THE PROJECT LIMITS.
 GRID DISTANCE = GROUND DISTANCE X CAF.
 GRID COORDINATES ARE STORED UNDER FILE NAME s100985gi.CTL
 HORIZONTAL DATUM: NAD 83 (2011)
 VERTICAL DATUM: NAVD 88 POSITIONAL ACCURACY THIRD ORDER, UNLESS SPECIFIED OTHERWISE
 AT A SPECIFIC POINT.

BASIS OF BEARING:
ARKANSAS STATE PLANE GRID BEARINGS - 0301-NORTH ZONE
DETERMINED FROM GPS CONTROL POINTS; VT AND HZ BASED ON STATIC GPS
CONVERGENCE ANGLE: 00-57-38 LEFT AT Pn1 8 LT; N 35-45-31 LG, W090-20-56
GRID AZIMUTH = ASTRONOMICAL AZIMUTH - CONVERGENCE ANGLE.

POINT	STATION	TYPE	NORTHING	EASTING
8000	100+00.00	POB	517241.1467	1804956.5623
8001	110+00.00	POE	518241.0746	1804944.5540





POINT	STATION	TYPE	NORTHING	EASTING
8002	200+00.00	POB	522976.1235	1801755.8163
8003	210+00.00	POE	522991.0724	1802755.7046

POINT	STATION	TYPE	NORTHING	EASTING
8004	300+00.00	POB	533565.4500	1812027.6751
8005	310+00.00	POE	533555.0016	1813027.6242

POINT	STATION	TYPE	NORTHING	EASTING
8006	20+72.25	POB	517413.3868	1804954.4938
8008	22+37.59	PRC	517577.4770	1804971.5246
8010	25+68.27	PRC	517905.2005	1804967.5890
8012	27+33.60	POE	518068.8344	1804946.6225


K:\16\Bldgs_7/18/2021 5:05:28 PM
WORKSPACE: ARDOT
\\LITTAFILES\Subr\mbaker-corp.com\111\herock\Projects\ARDOT_174446_100985_Hwy 135 & 139 Strs & Apprs\Design\CIVIL\Drawings\100985_09_SC_SITE1.dgn
REVISED DATE: **REVE DATE**

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		100985	45	59
				SURVEY CONTROL DETAILS				

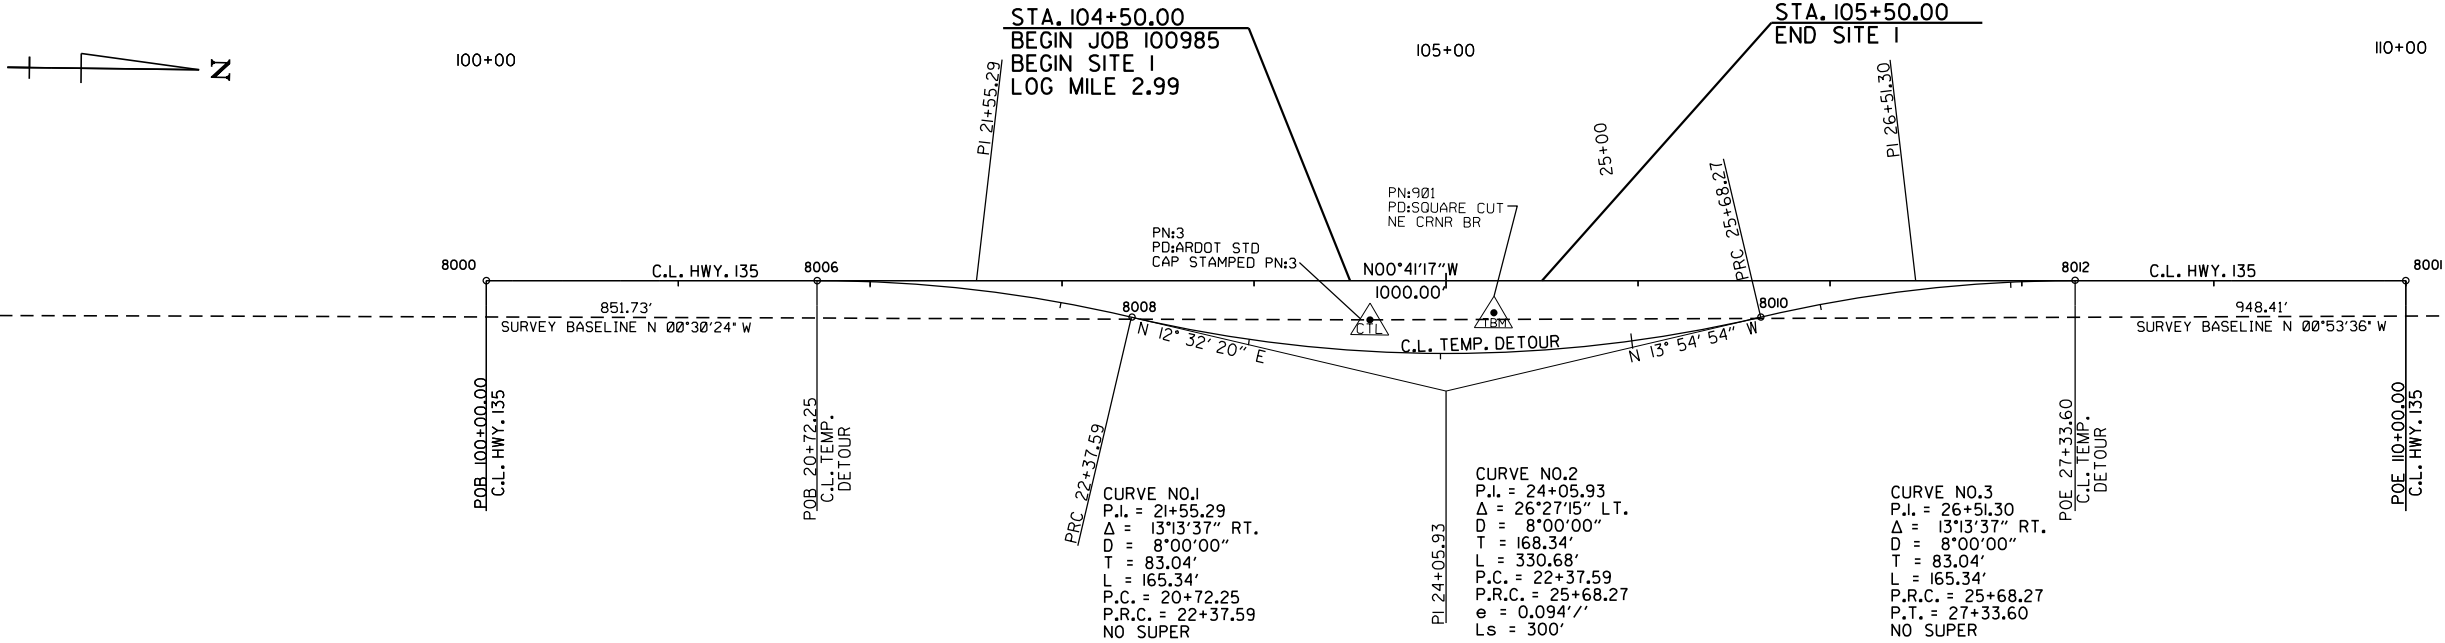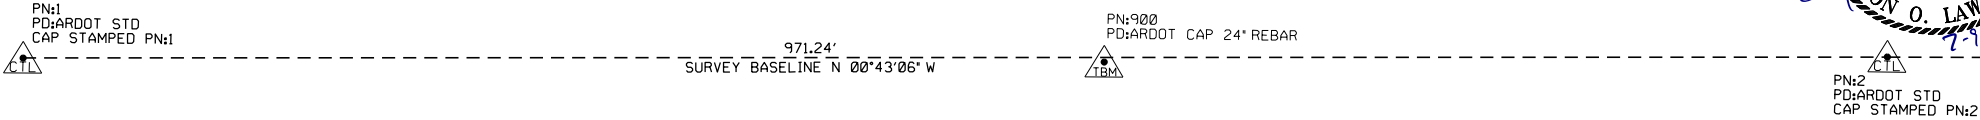


HWY. 135 - SITE 1
SURVEY CONTROL DETAILS

K:\16\Blends 7/18/2021 5:05:29 PM
WORKSPACE: ARDOT
\\LITTAFILES\Subr\mbaker-corp.com\11\Herock\Projects\ARDOT\174446_100985.Hwy 135 & 139 Strs & Apprs\Design\CIVIL\Drawings\100985_09_SC SITE3_01.dgn
REVISED DATE: **REVIDATE**

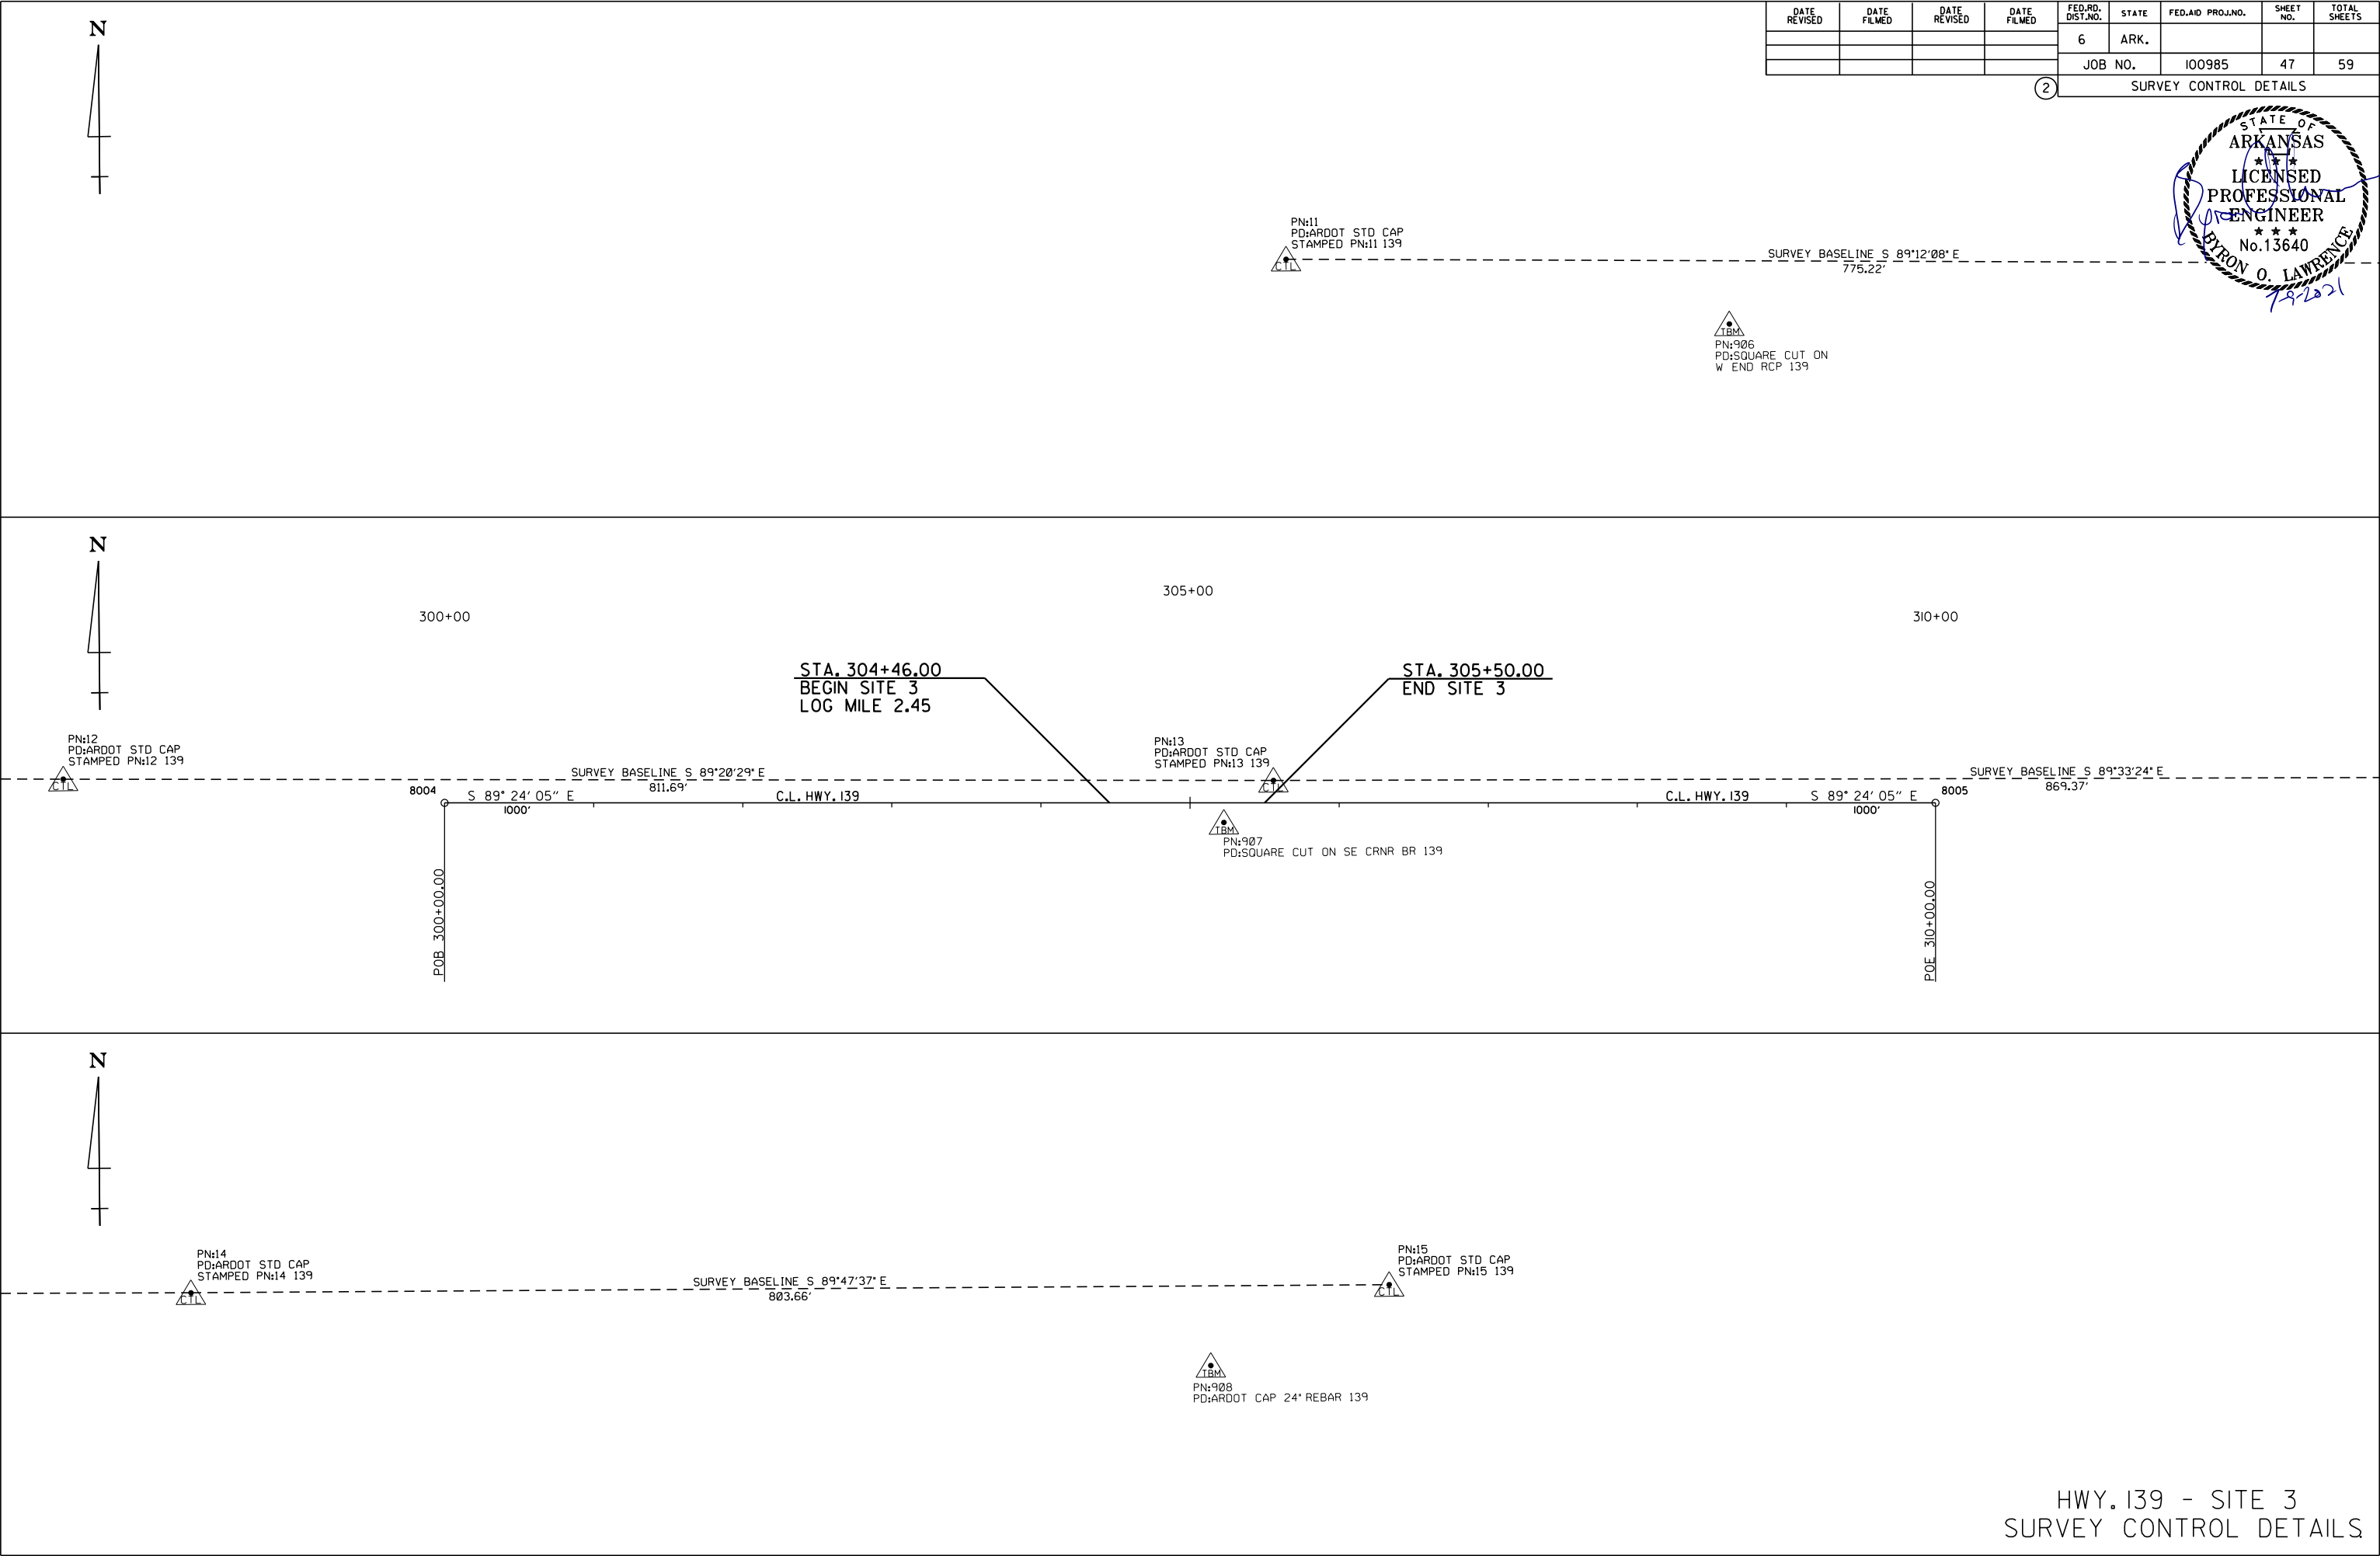

HWY. 139 - SITE 3
SURVEY CONTROL DETAILS


DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		100985	49	59
				PLAN AND PROFILE SHEETS				

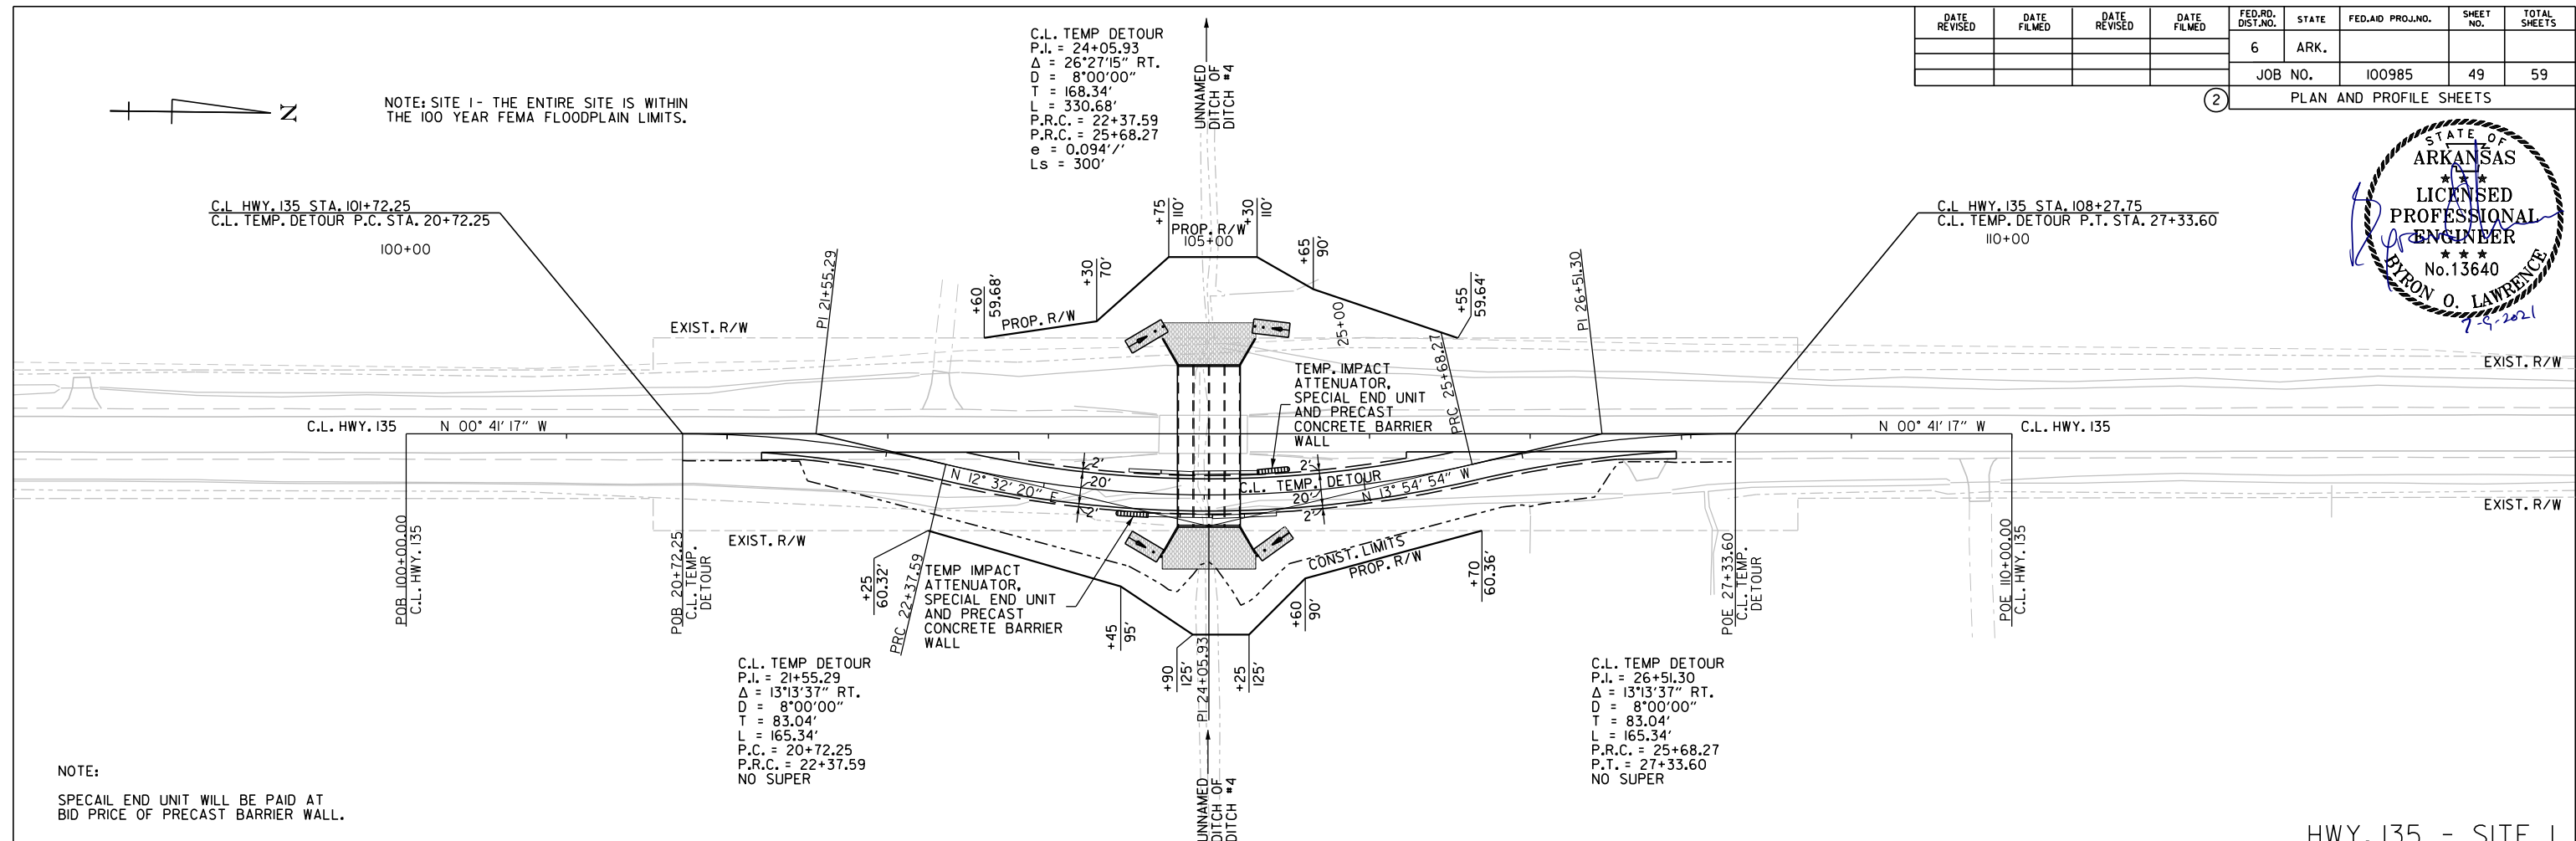

NOTE:
SPECAIL END UNIT WILL BE PAID AT
BID PRICE OF PRECAST BARRIER WALL.

REFER TO SURVEY CONTROL DETAIL SHEETS
FOR HORIZONTAL AND VERTICAL CONTROLS.

STA. 22+47.93	BEGIN SUPERELEVATION
STA. 24+02.93	MAX SUPERELEVATION (0.048'/'
STA. 25+57.93	END SUPERELEVATION

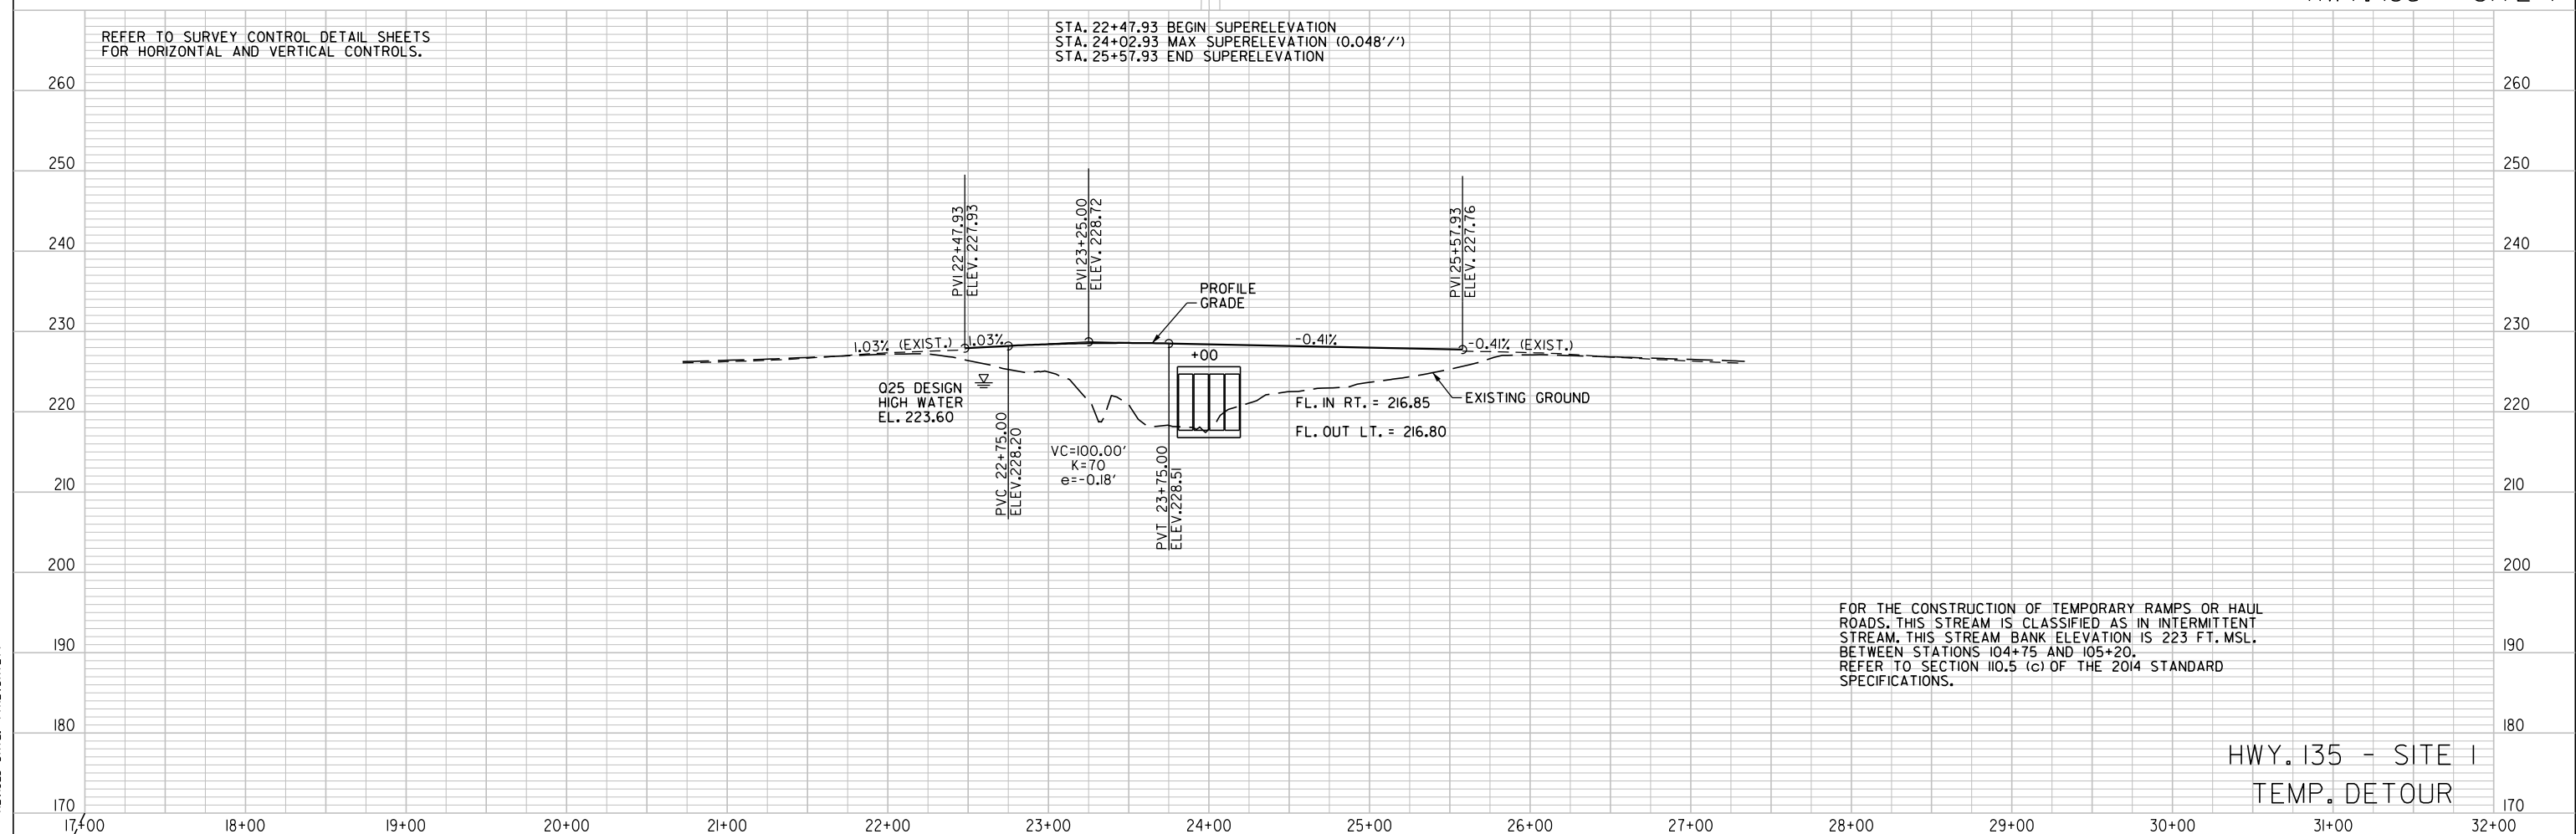

FOR THE CONSTRUCTION OF TEMPORARY RAMPS OR HAUL
ROADS, THIS STREAM IS CLASSIFIED AS IN INTERMITTENT
STREAM. THIS STREAM BANK ELEVATION IS 223 FT. MSL.
BETWEEN STATIONS 104+75 AND 105+20.
REFER TO SECTION 110.5 (c) OF THE 2014 STANDARD
SPECIFICATIONS.

HWY. 135 - SITE 1
TEMP. DETOUR


[illegible]

2


STATE OF
ARKANSAS

LICENSED
PROFESSIONAL
ENGINEER

No. 13640
BYRON O. LAWRENCE
7-9-2021







DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		100985	52	59
(2)				CROSS SECTIONS				

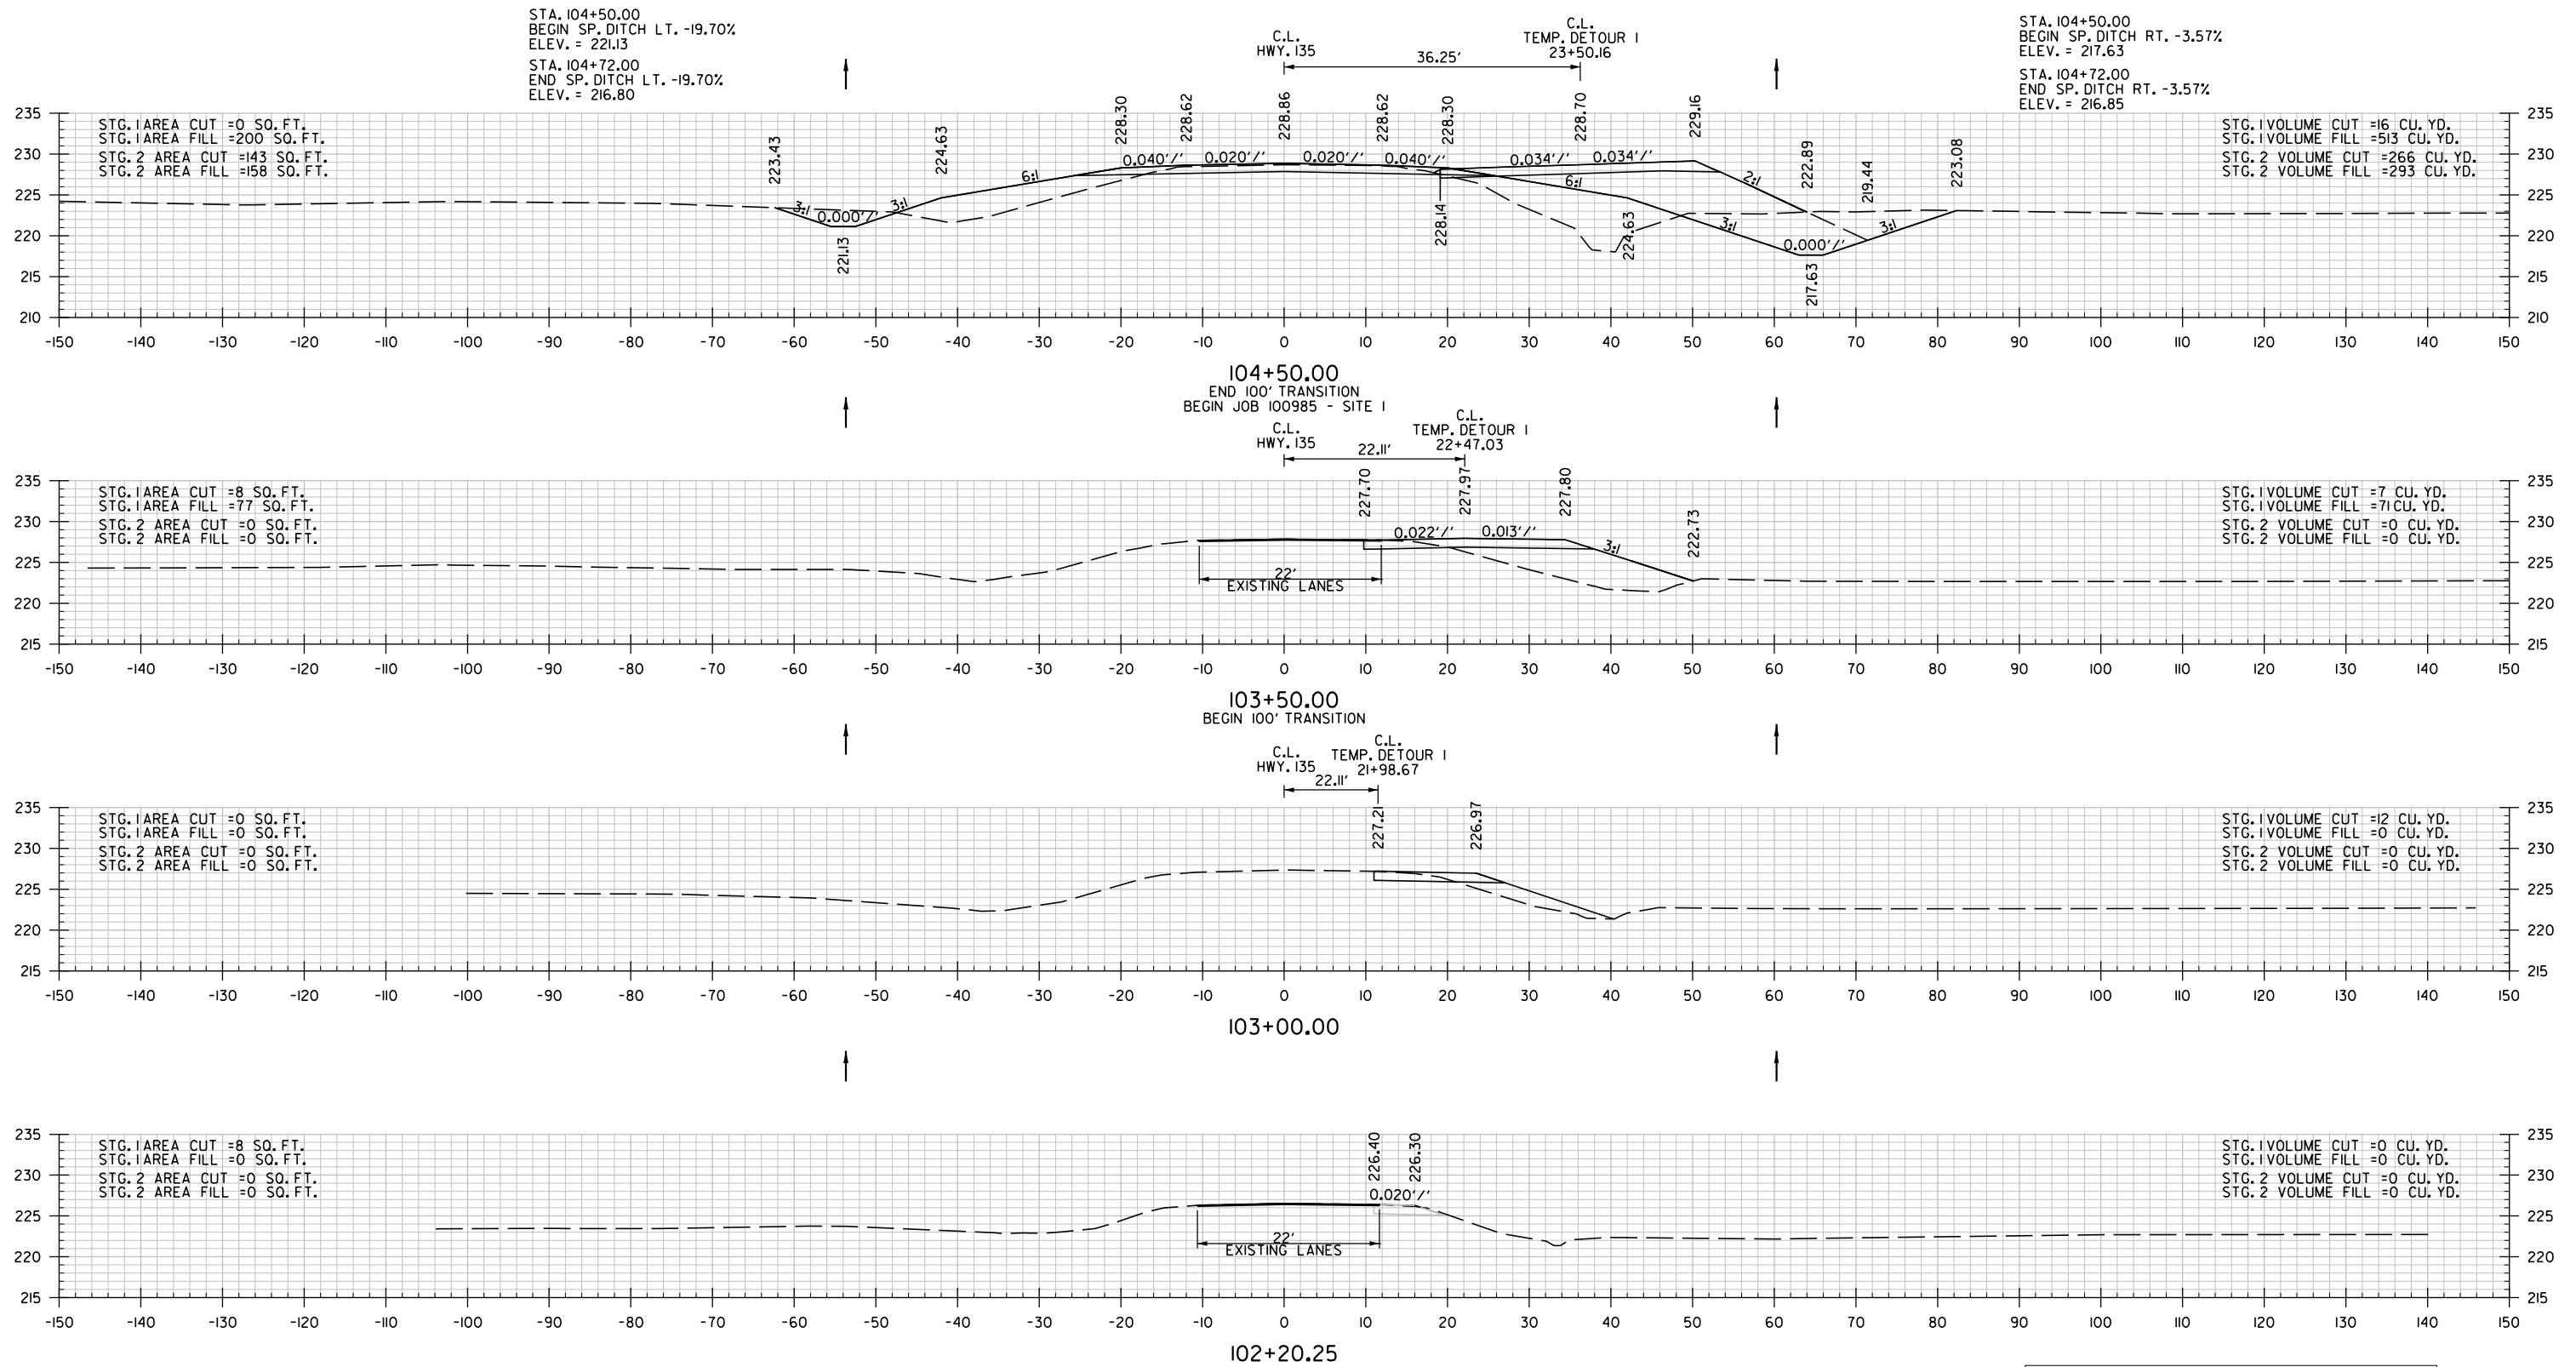

K:\12\120921 5:05:32 PM
WORKSPACE: ARDOT
\\LIT\AR\Sub\mbooker-corp.com\11\Herock\Projects\ARDOT\174446_100985_Hwy 135 & 139 Strs & Apprs\Design\CIVIL\Drawings\100985_21_CX_SITE\01.dgn
REVISED DATE: **REVIDATE**


DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		100985	53	59
2 CROSS SECTIONS								

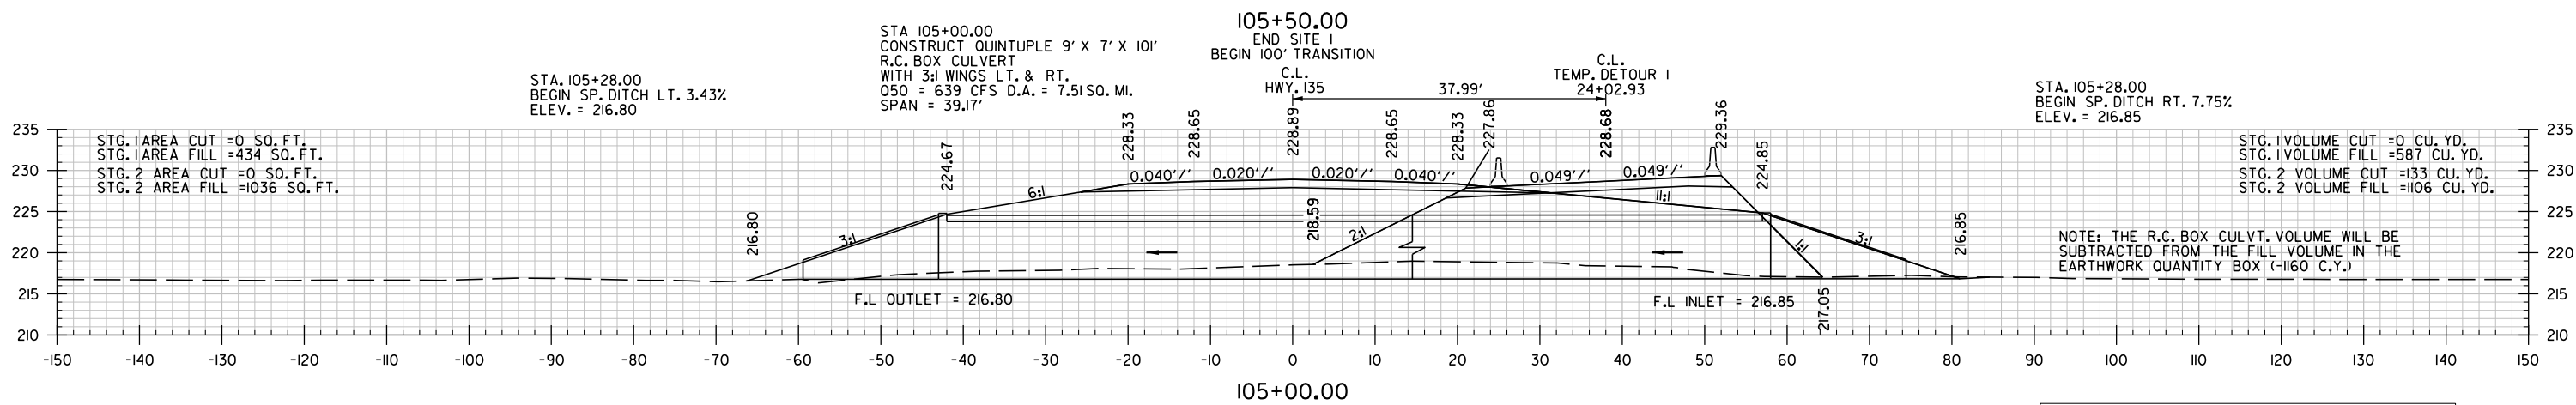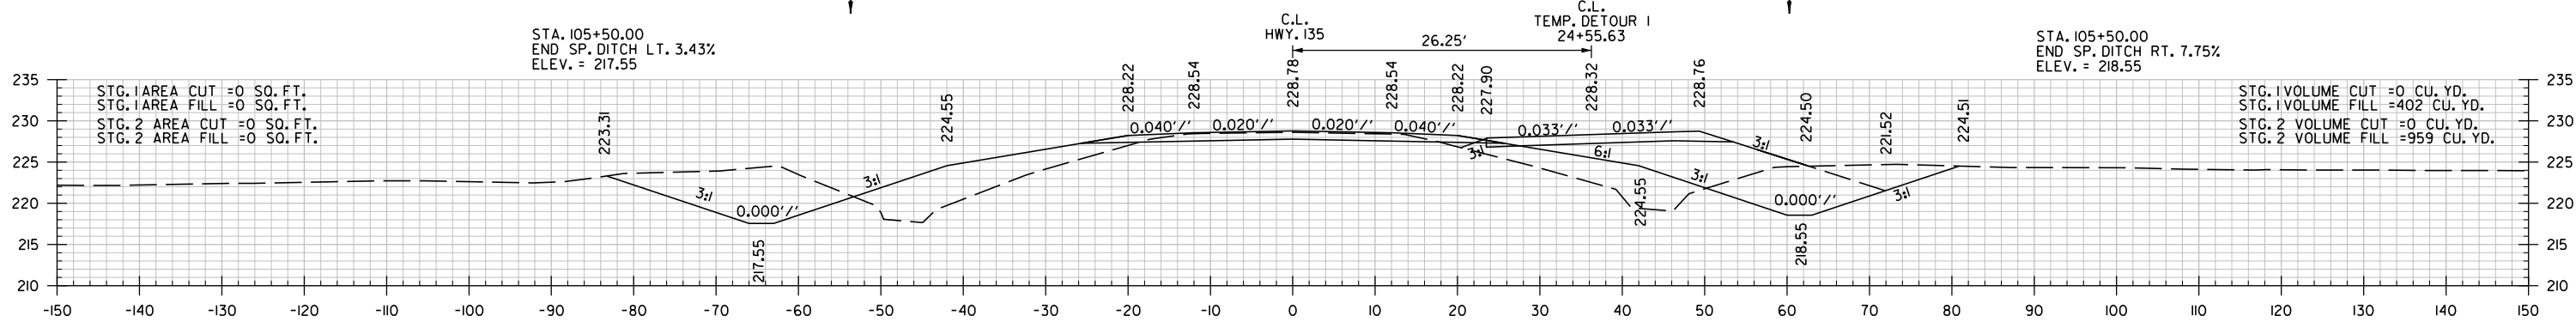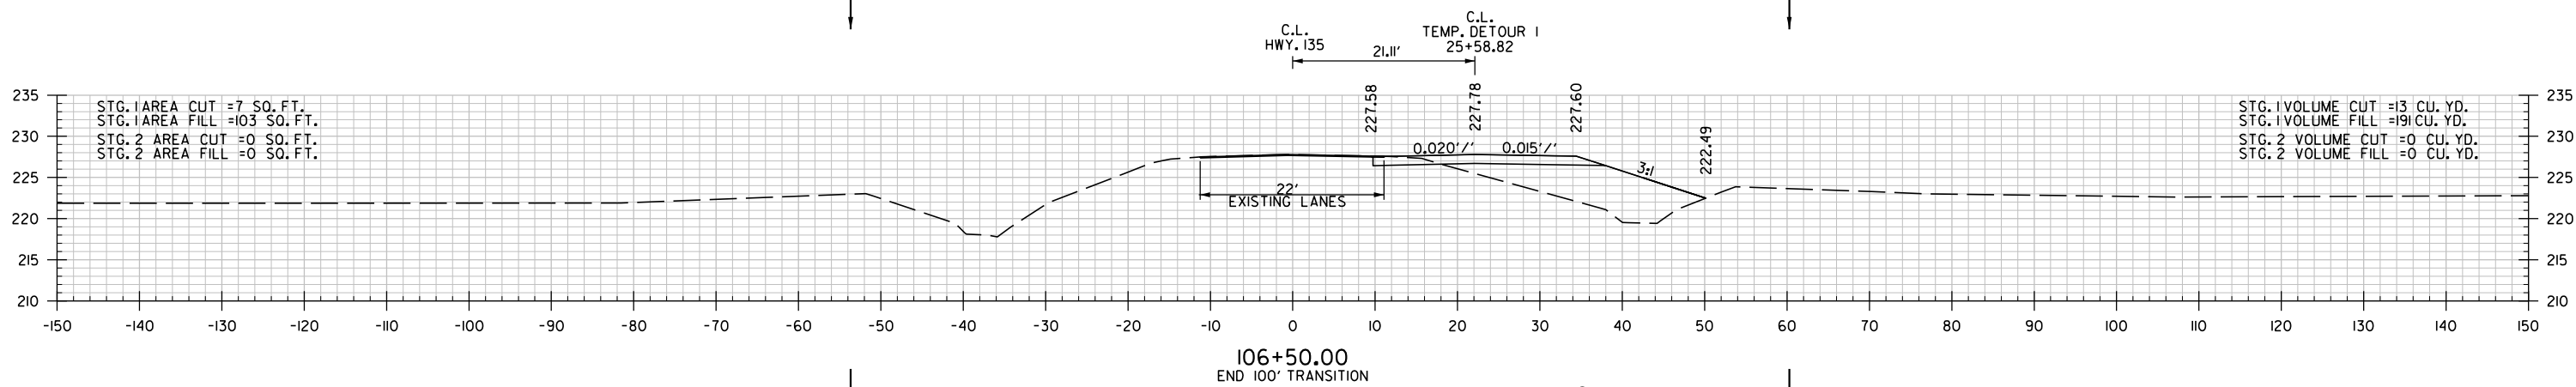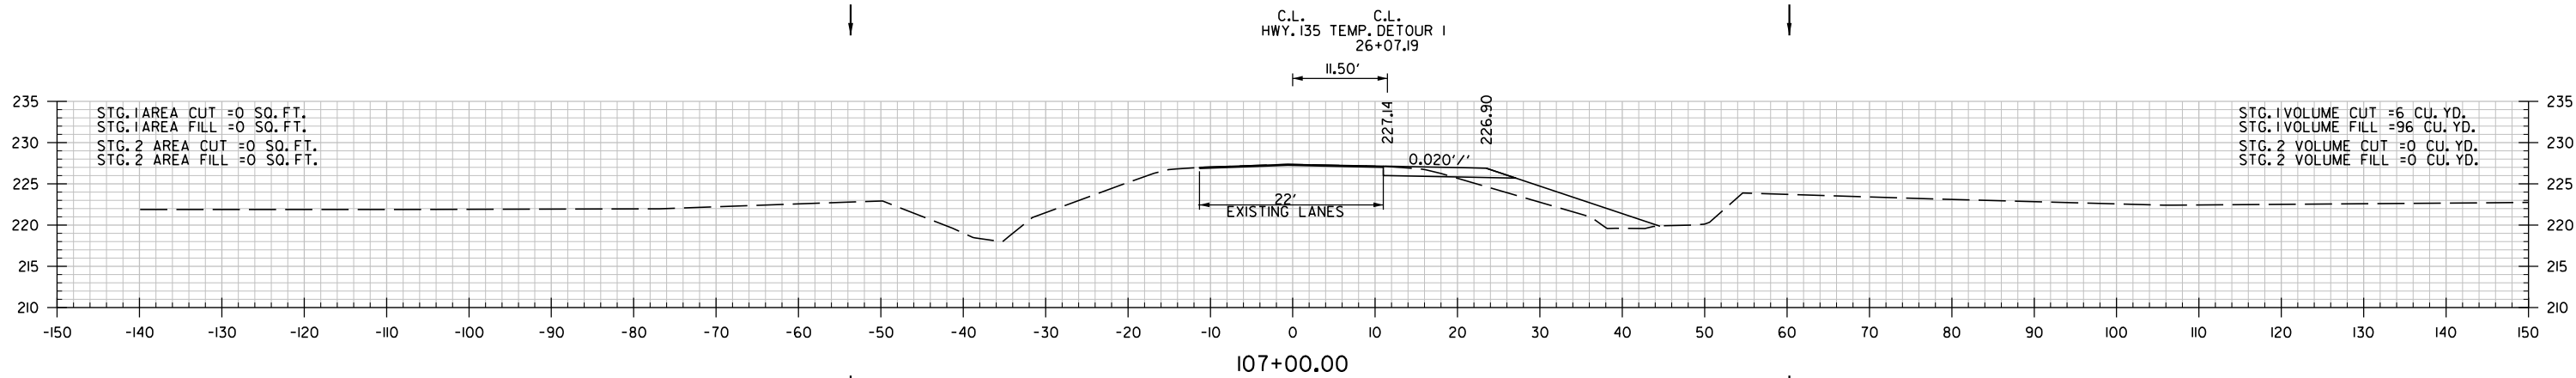

STA. 105+00 TO STA. 107+00





K:\a1\blens 7/18/2021 5:05:32 PM
WORKSPACE: ARDOT\174446\100985.Hwy 135 & 139 Strs & Apprs\Design\Civil\Drawings\100985_21.CX_SITE1.dgn
\\LIT\ARFIS\Subr\mbocker-corp.com\174446\100985.Hwy 135 & 139 Strs & Apprs\Design\Civil\Drawings\100985_21.CX_SITE1.dgn
REVISED DATE: **REDATE**

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		100985	54	59
				2	CROSS SECTIONS			

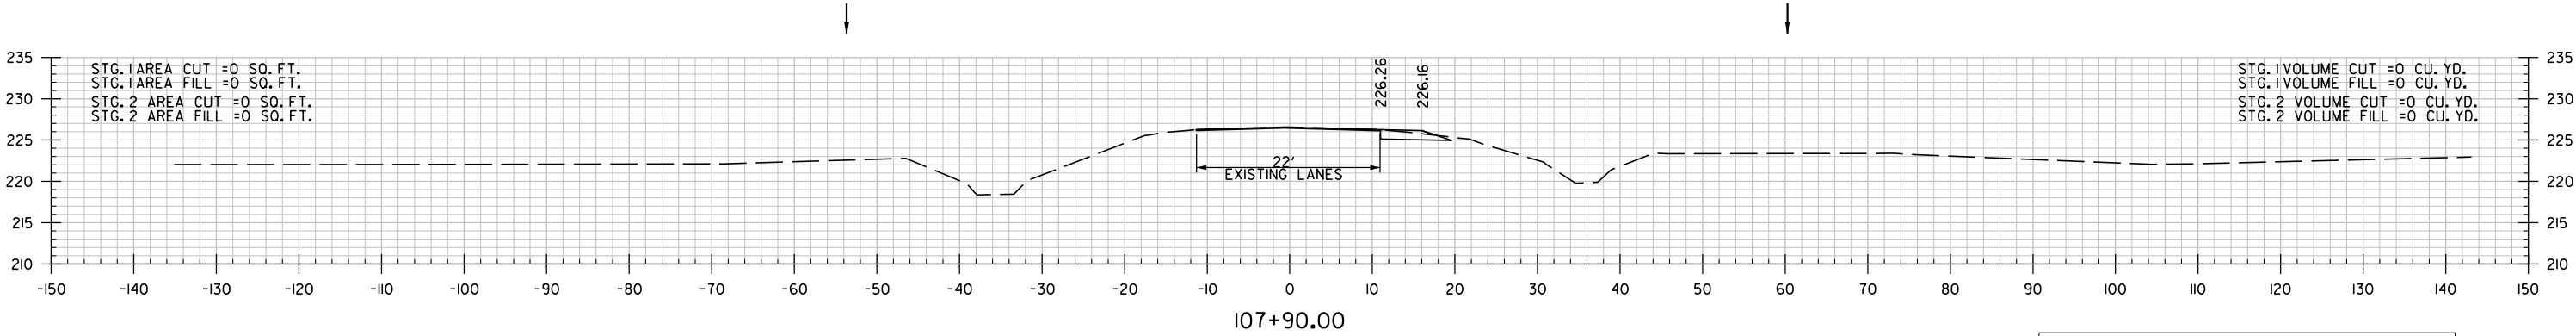


STA. 107+90 TO STA. 107+90

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		I00985	55	59
			(2)	CROSS SECTIONS				

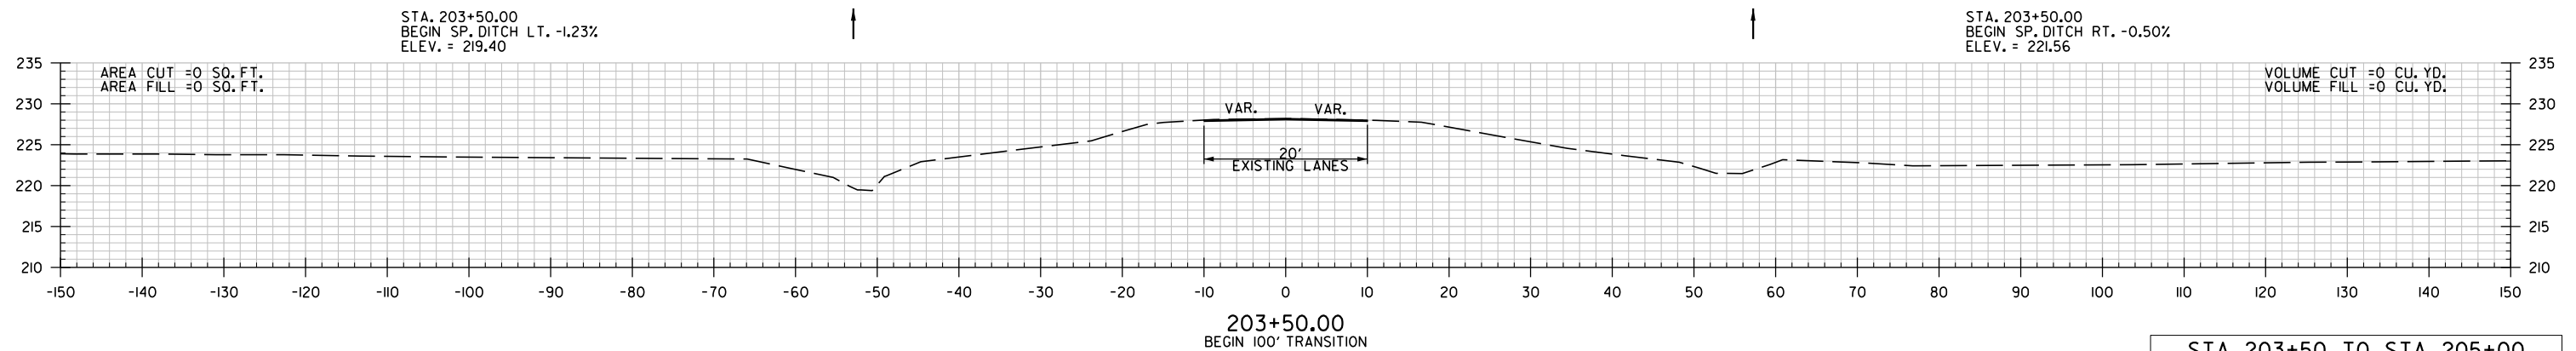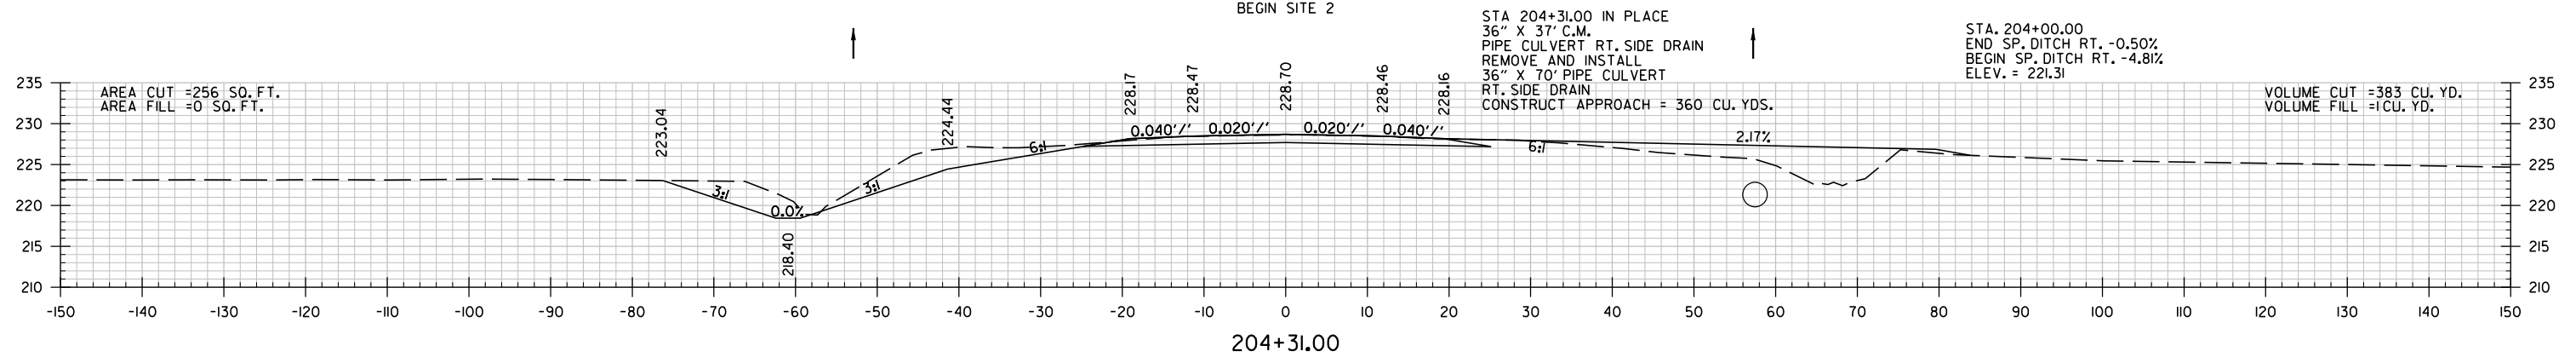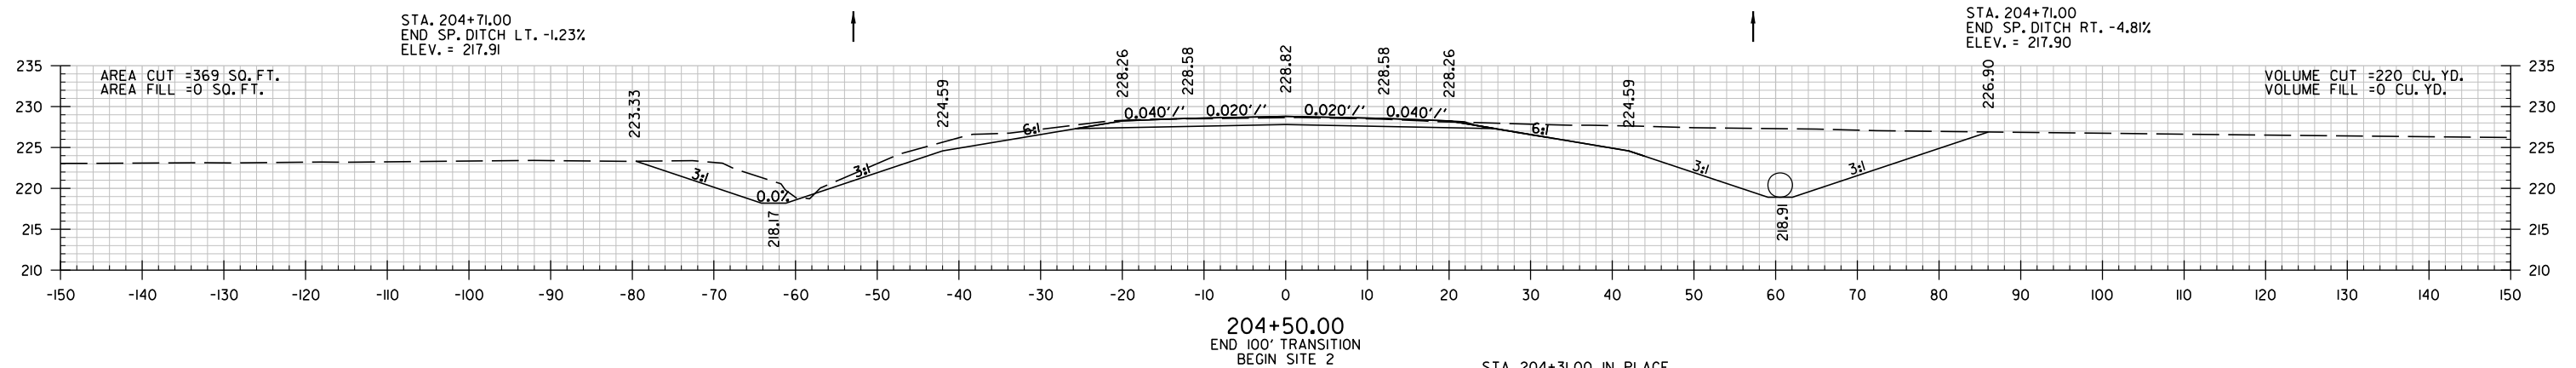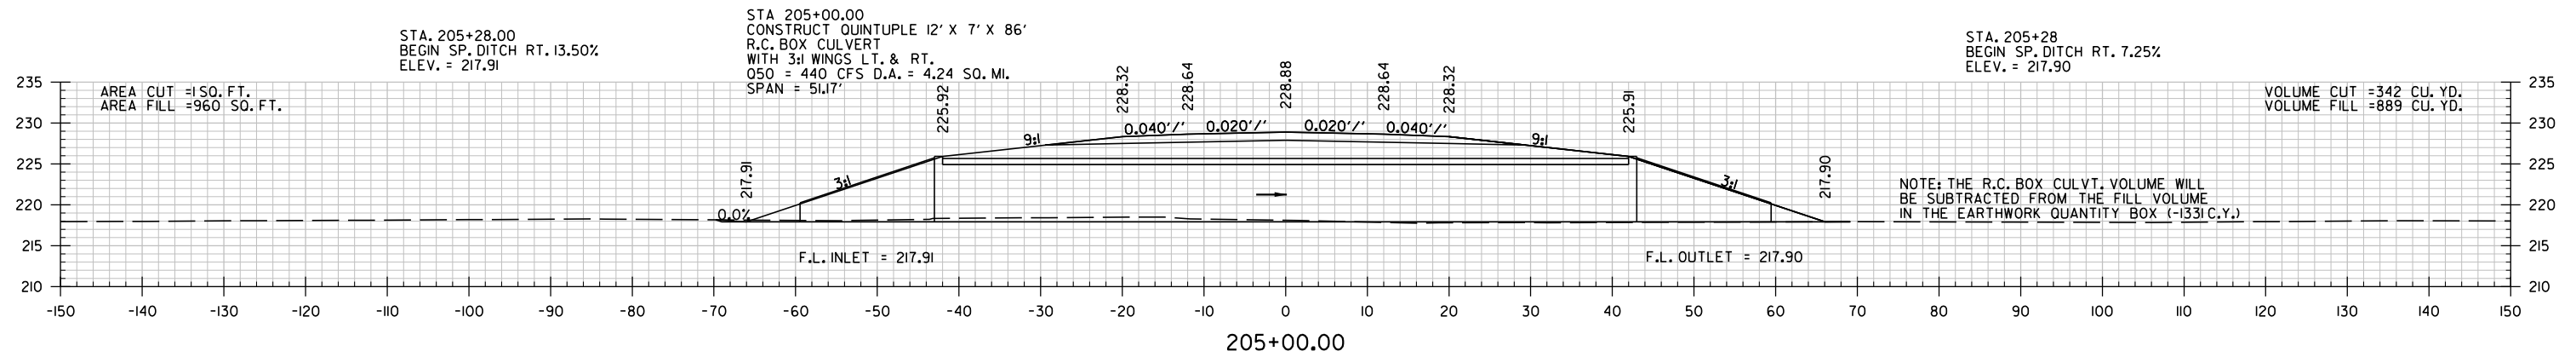

STA. 203+50 TO STA. 205+00





2

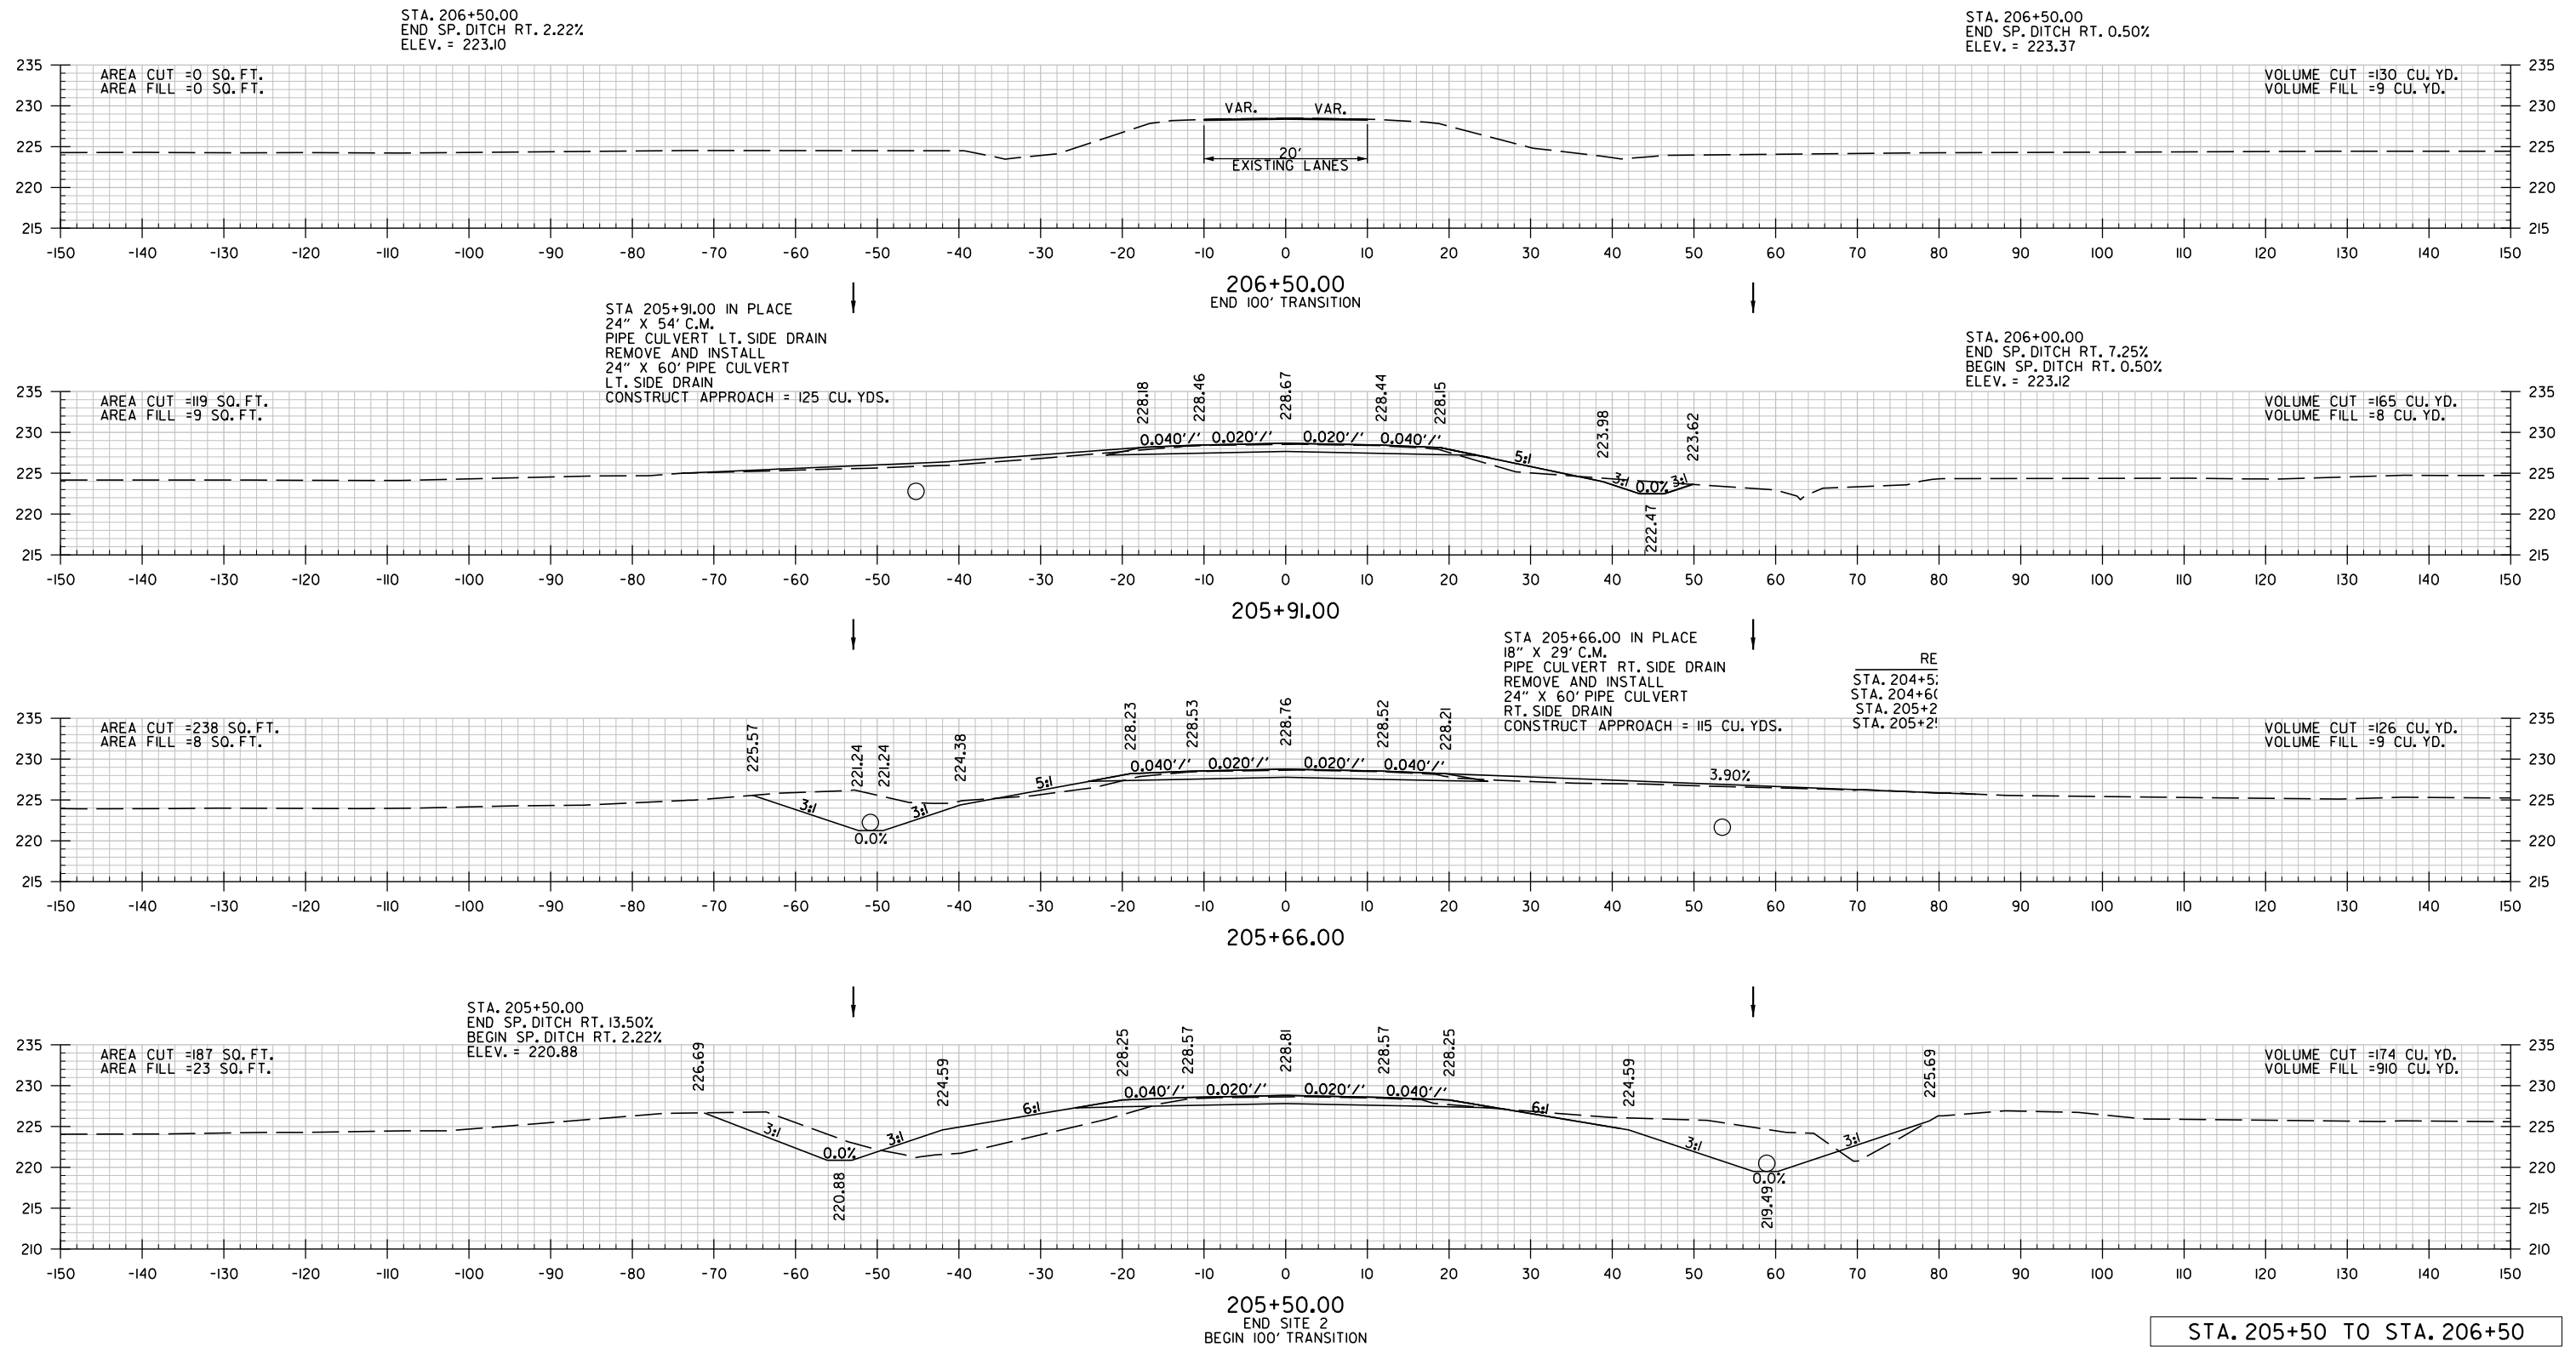

K:\1216\1216.dgn 7/18/2021 5:05:33 PM
WORKSPACE: ARDOT
\\LIT\AR\Sub\mbooker-corp.com\11\Herock\Projects\ARDOT_174446_100985.Hwy 135 & 139 Strs & Apprs\Design\Civil\Drawings\100985_21_CX_SITE3.01.dgn
REVISED DATE: **REDATE**

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		100985	57	59





2 CROSS SECTIONS

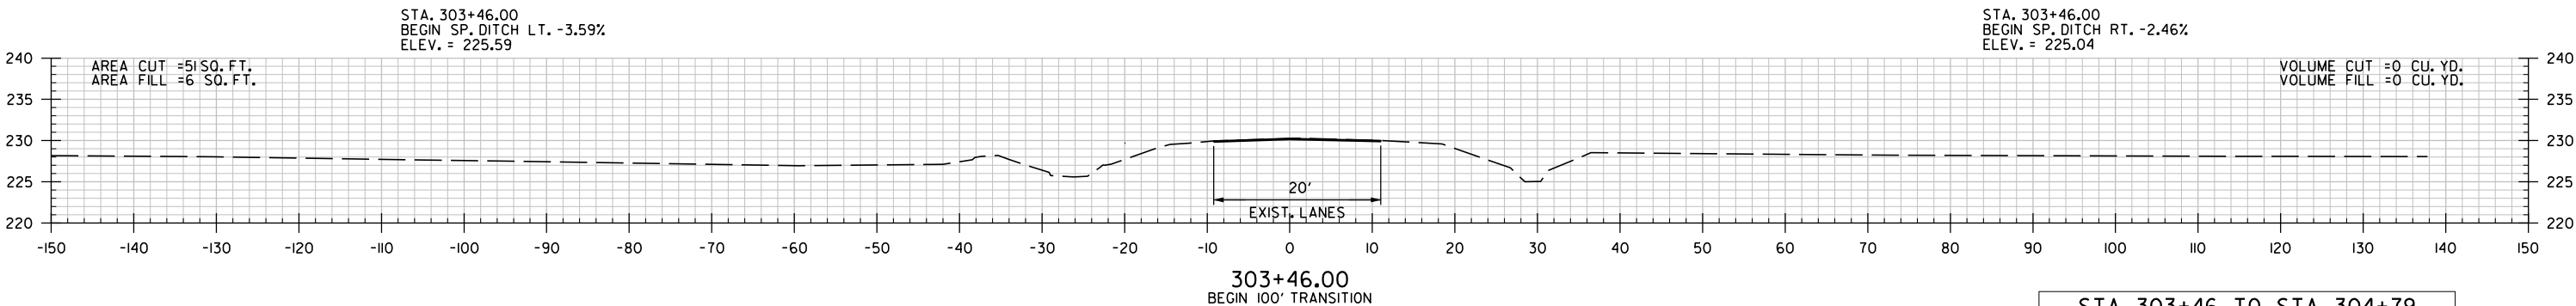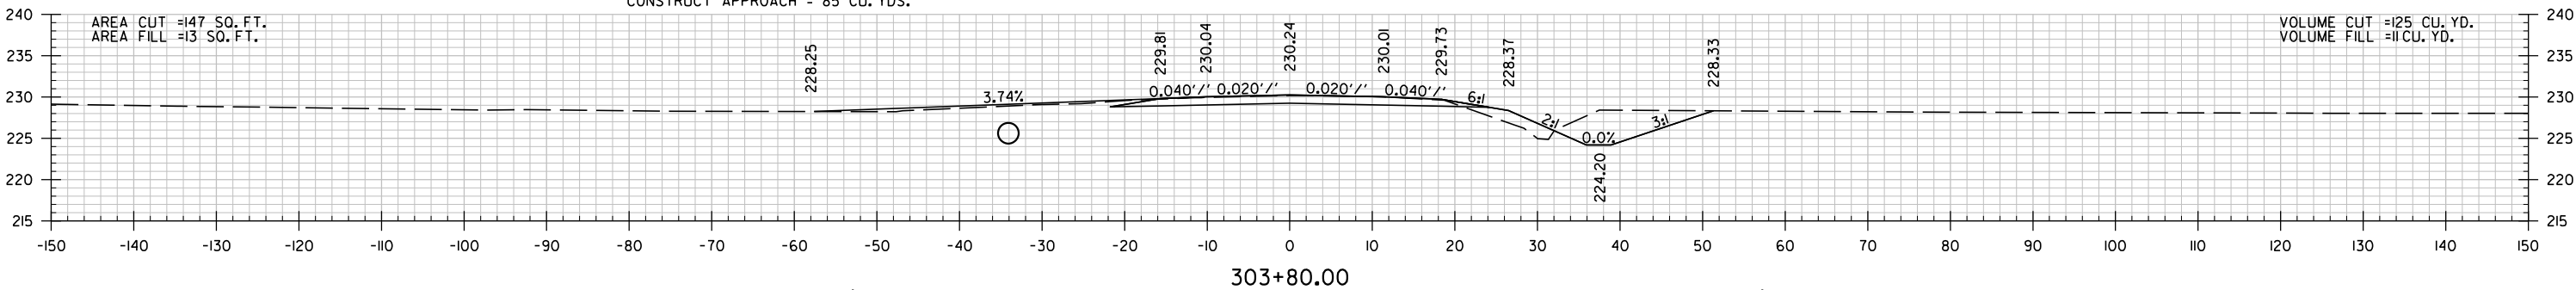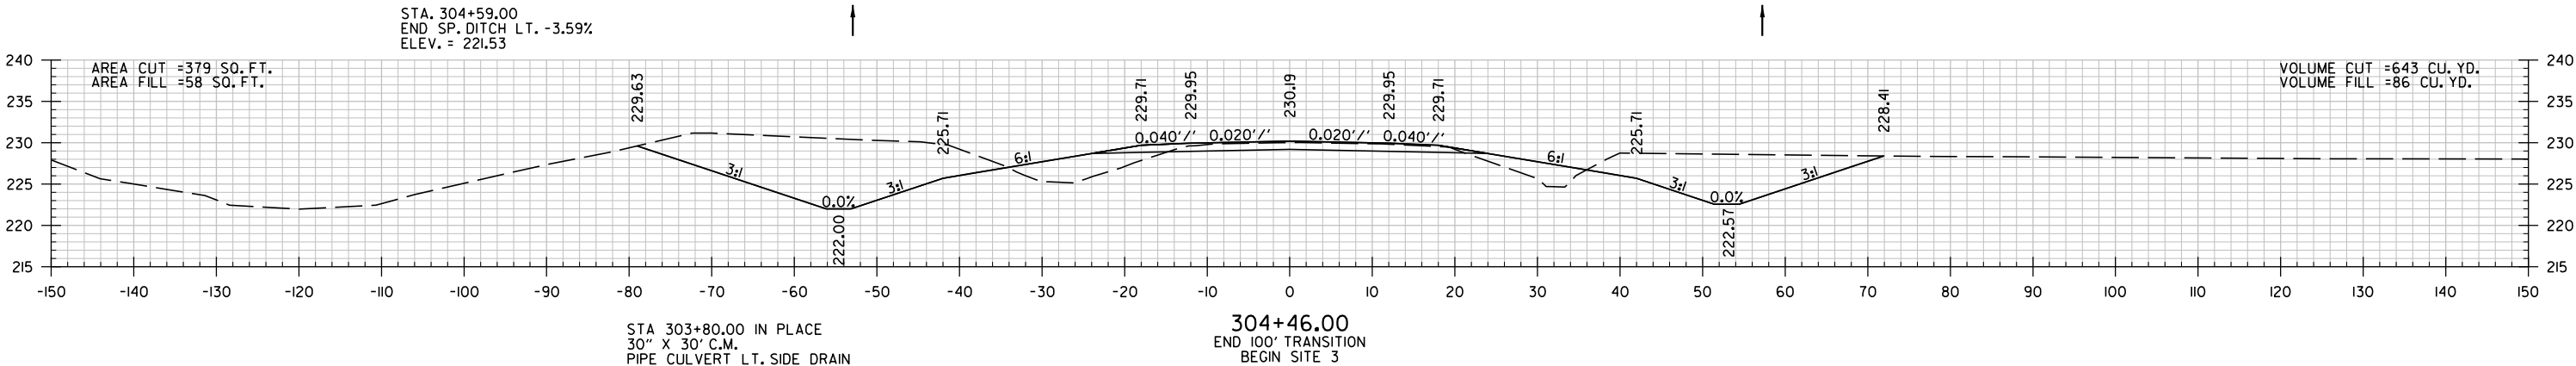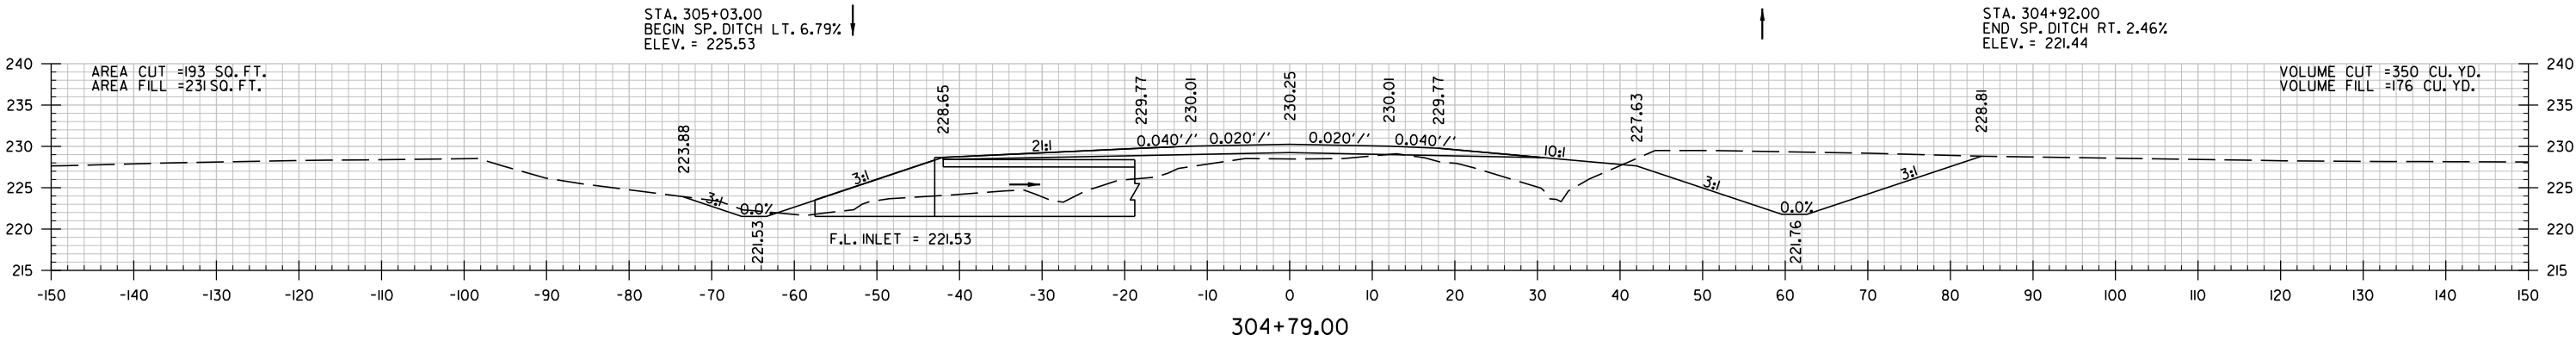


K:\11\blens 7/18/2021 5:05:33 PM
WORKSPACE: ARDOT
\\LITAFRIS\Subr\mbooker-corp.com\11\Herock\Projects\ARDOT\174446.100985.Hwy 135 & 139 Strs & Apprs\Design\Civil\Drawings\RD00985.21\CX_SITE3.01.dgn
REVIS DATE: \$*REVISDATE\$*

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		100985	58	59
				CROSS SECTIONS				

2

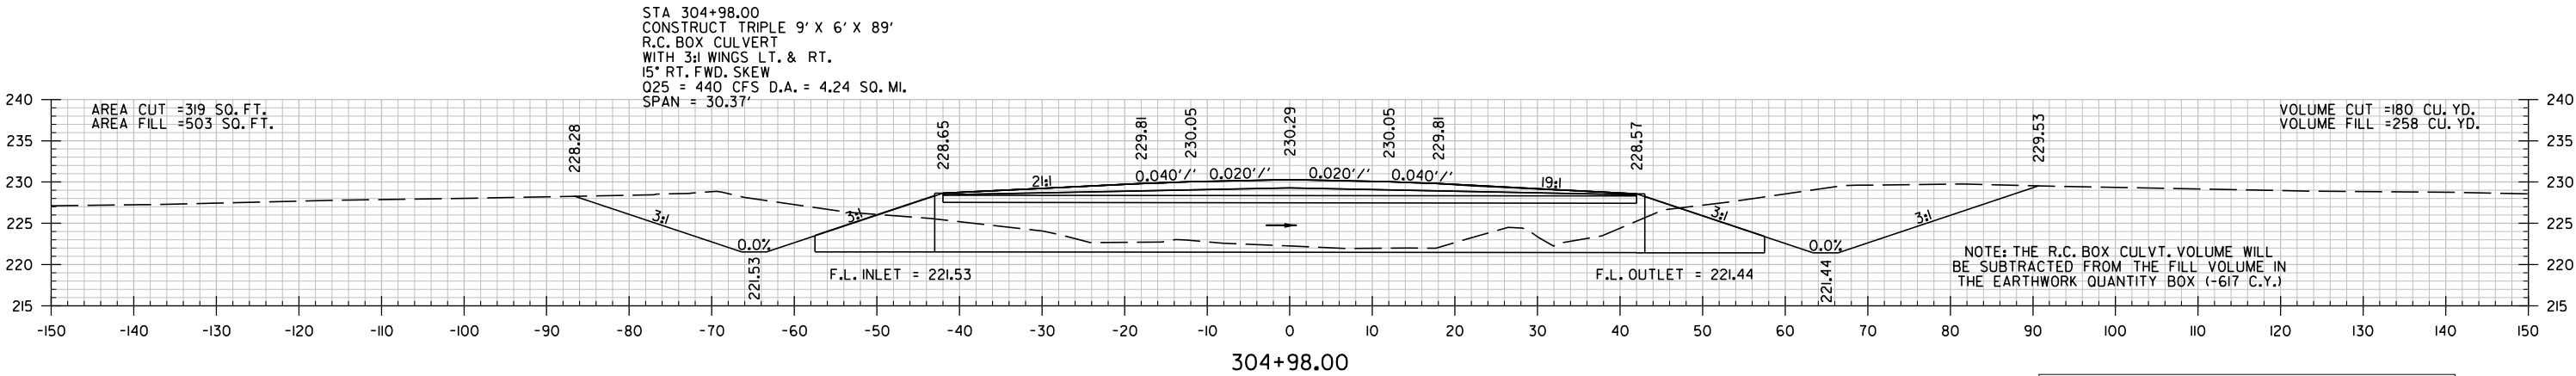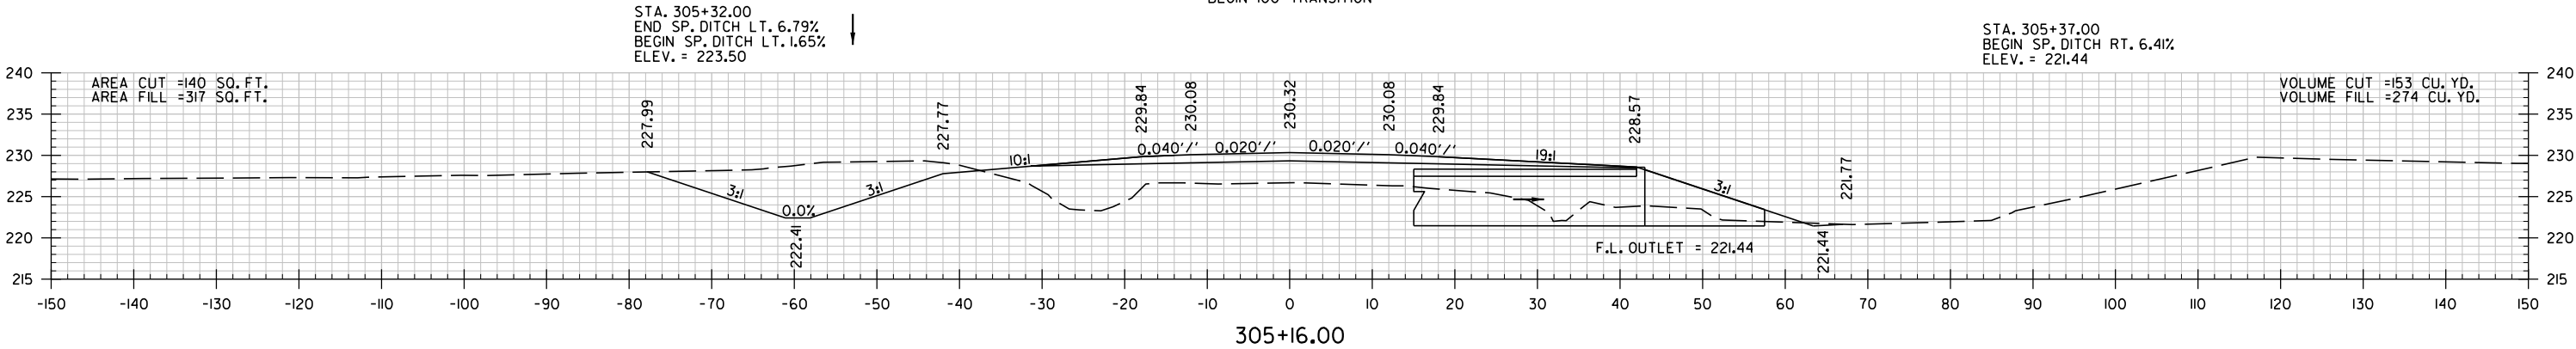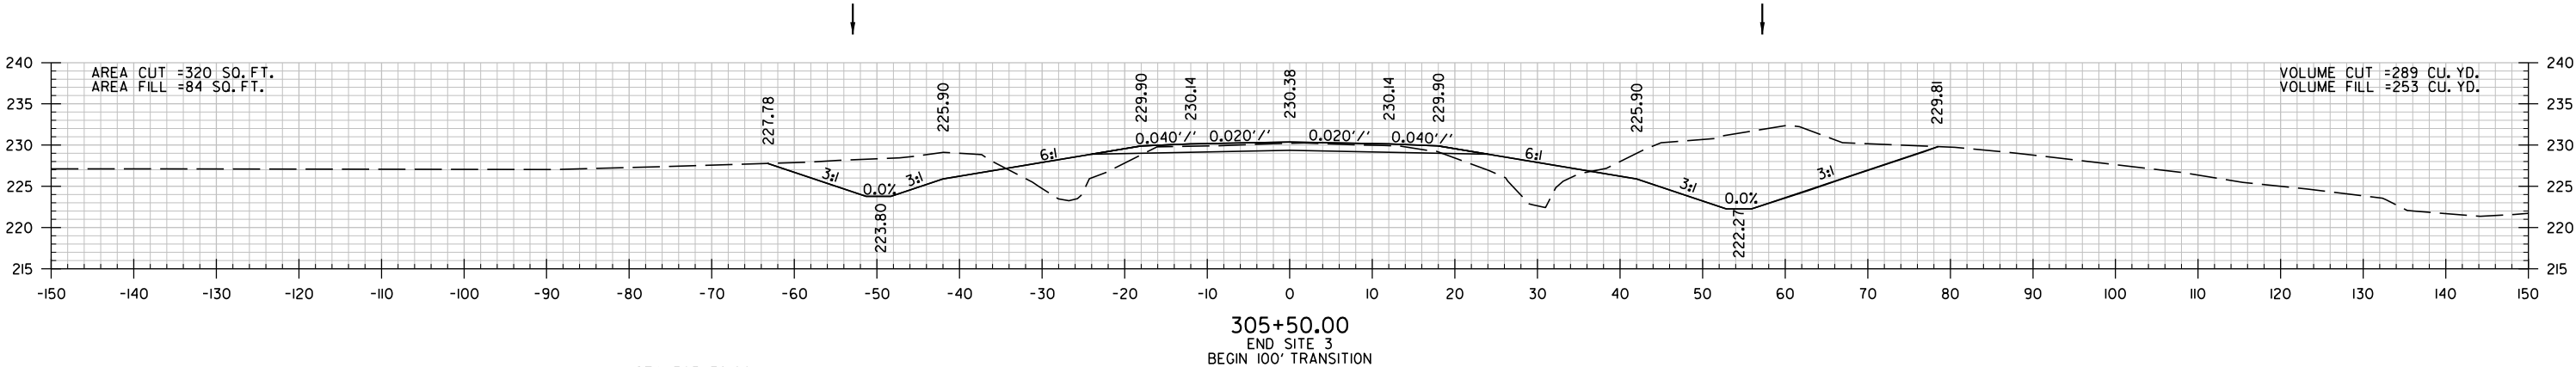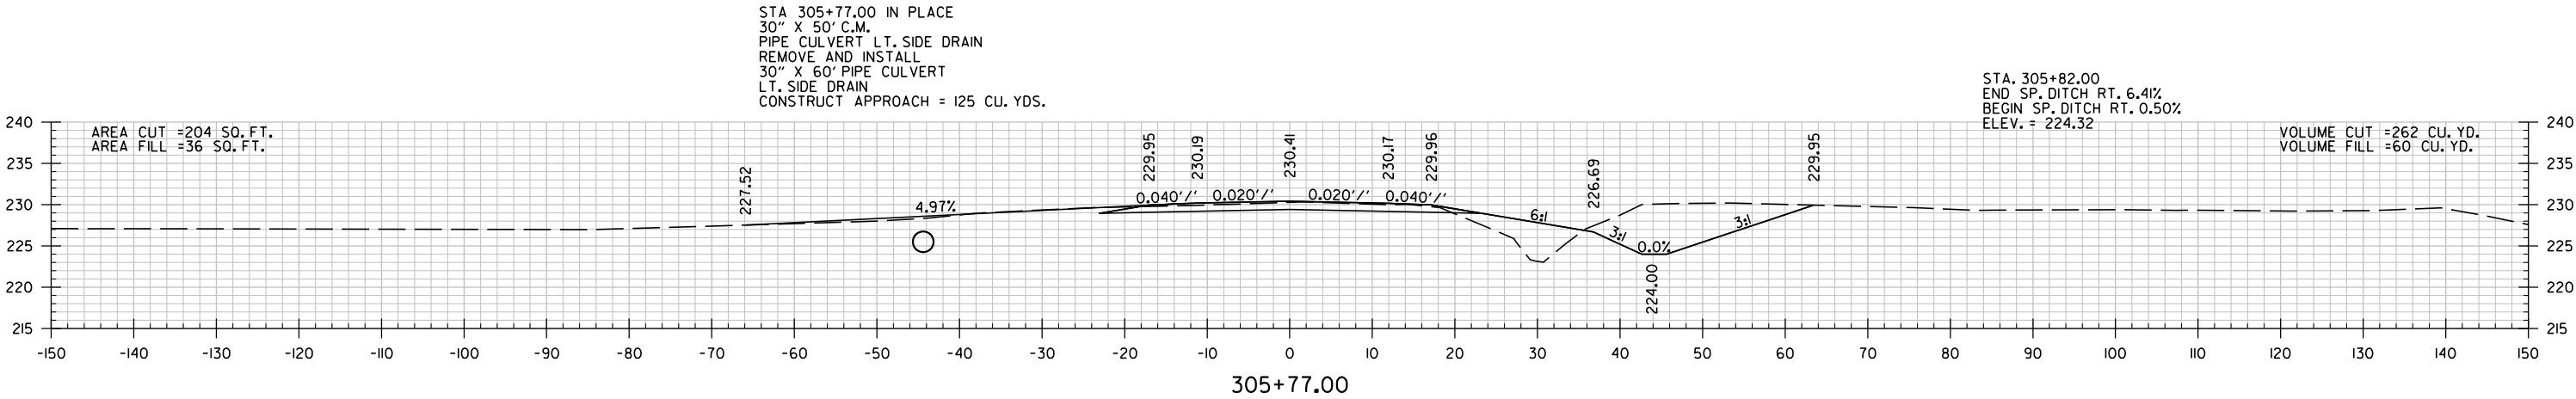


STA. 304+98 TO STA. 305+77

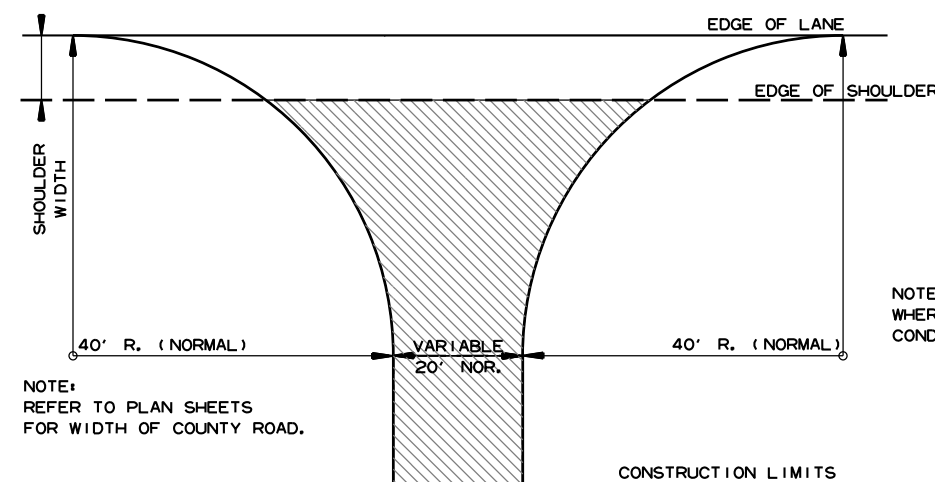

NOTE: TURNOUTS SHALL BE MODIFIED WHERE NECESSARY TO MEET LOCAL CONDITIONS AS DIRECTED BY THE ENGINEER.

ACHM SURFACE COURSE (1/2") (220 LBS. PER SQ. YD.) AND AGGREGATE BASE COURSE (CLASS 7) 7" COMP. DEPTH, UNLESS OTHERWISE SPECIFIED IN PLANS.


DETAIL FOR COUNTY ROAD TURNOUTS
OPEN SHOULDER SECTION

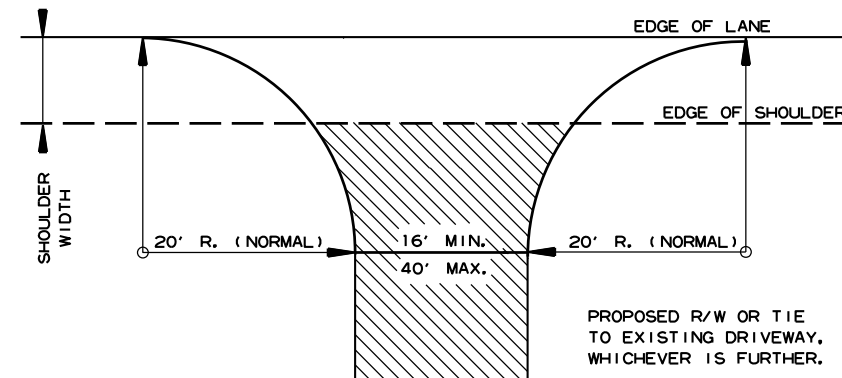


NOTE: TURNOUTS AND PRIVATE DRIVES SHALL BE MODIFIED WHERE NECESSARY TO MEET LOCAL CONDITIONS AS DIRECTED BY THE ENGINEER.

ACHM SURFACE COURSE (1/2") (220 LBS. PER SQ. YD.) AND AGGREGATE BASE COURSE (CLASS 7) 7" COMP. DEPTH IF ASPHALT OR GRAVEL DRIVE EXISTING; OR 6" CONCRETE IF CONCRETE DRIVE EXISTING.

DETAIL FOR DRIVEWAY TURNOUTS
OPEN SHOULDER SECTION
(ARTERIALS)

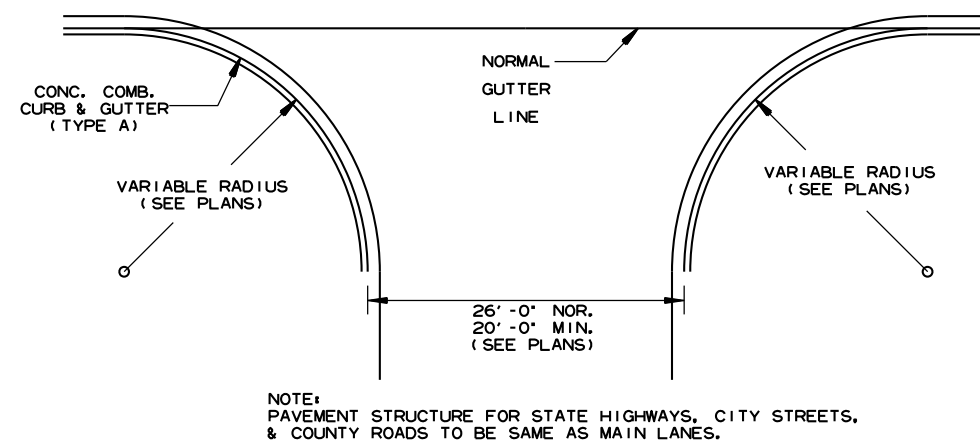

DETAIL OF TURNOUTS, ASPHALT STREETS,
COUNTY ROADS & STATE HIGHWAYS
CURB & GUTTER SECTION

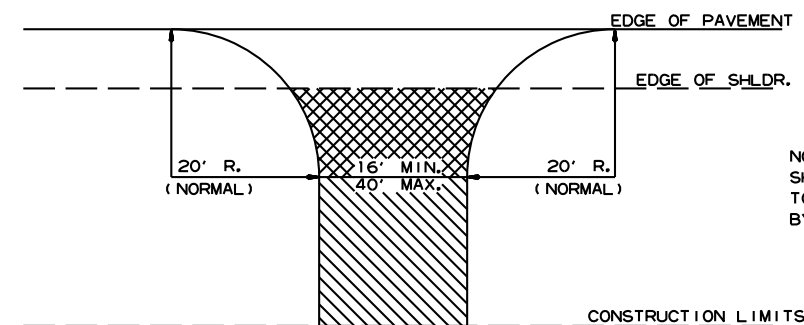

NOTE: TURNOUTS AND PRIVATE DRIVES SHALL BE MODIFIED WHERE NECESSARY TO MEET LOCAL CONDITIONS AS DIRECTED BY THE ENGINEER.


ASPHALT CONCRETE HOT MIX SURFACE COURSE (220 LBS. PER SQ. YD.) AGGREGATE BASE COURSE (CLASS 7) 7" COMP. DEPTH IF ASPHALT DRIVE EXIST OR 6" CONCRETE IF CONCRETE DRIVE EXIST.

AGGREGATE BASE COURSE (CLASS 7) 9" COMP. DEPTH OR CONFORM TO EXISTING DRIVEWAY

DETAIL FOR DRIVEWAY TURNOUTS
(COLLECTORS)

5-19-22		ISSUED
DATE REV	DATE FILMED	DESCRIPTION

ARKANSAS STATE HIGHWAY COMMISSION
DETAILS OF DRIVEWAYS & STREET
TURNOUTS
STANDARD DRAWING DR-2

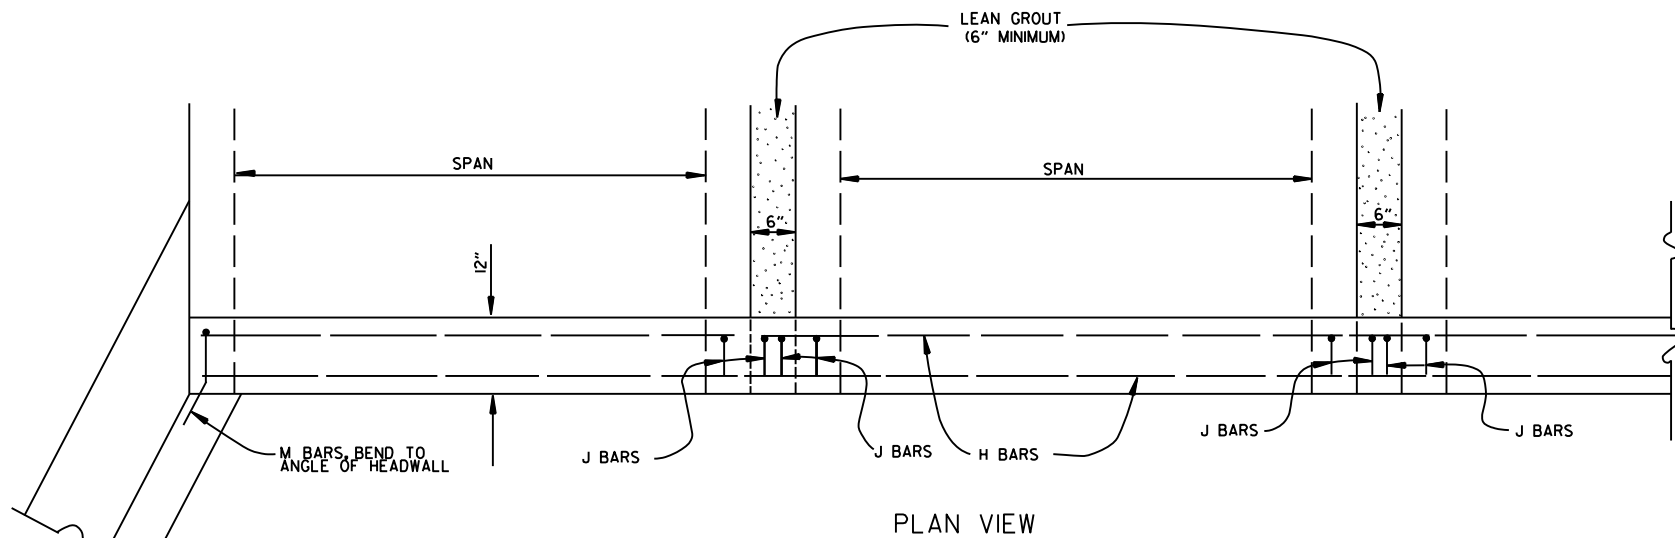

BAR LIST				
BAR	NO.	SIZE	LENGTH	BAR BENDING DIAGRAM
H	2	#4	•	
I	•	#4	•	
J	•	#4	1'-5"	
L	•	#4	3'-2"	
M	•	#4	1'-8"	

• NOTE: LENGTH AND NUMBER OF BARS VARIES WITH SIZE OF CULVERT

GENERAL NOTES

WINGS, CURTAIN WALLS AND APRONS SHALL BE TIED TO THE PRECAST CULVERT SECTION BY CASTING BARS IN CULVERT END SECTIONS AS SHOWN OR BY DOWELING AND GROUTING. J BARS AND M BARS SHALL BE EMBEDDED A MINIMUM OF 10" IN PRECAST BOX.

WINGS, FOOTINGS, APRONS AND CURTAIN WALLS SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE APPLICABLE WING DRAWING. STEEL AND CONCRETE QUANTITIES WILL BE ADJUSTED TO FIT THE IN-PLACE WIDTH & HEIGHT OF THE PRECAST CONCRETE BOX CULVERTS.

ALL EXPOSED CORNERS TO HAVE $\frac{3}{4}$ " CHAMFERS.

WINGWALLS AND FOOTINGS MAY BE ADJUSTED IN THE FIELD AS DIRECTED BY THE ENGINEER.

ALL CONCRETE, REINFORCING STEEL, LEAN GROUT, MEMBRANE WATERPROOFING, DRAINAGE FILL MATERIAL, GEOTEXTILE FILTER FABRIC, LABOR, MATERIALS AND EQUIPMENT REQUIRED FOR INSTALLING PRECAST BOX CULVERTS WILL NOT BE PAID FOR DIRECTLY BUT WILL BE CONSIDERED TO BE INCLUDED IN THE PRICE BID FOR THE ITEMS AS SPECIFIED IN SECTION 607 OF THE STANDARD SPECIFICATIONS.

LEAN GROUT SHALL CONSIST OF A SAND CEMENT MIXTURE MEETING THE FOLLOWING REQUIREMENTS: PORTLAND CEMENT SHALL BE TYPE I AND SHALL MEET THE REQUIREMENTS OF AASHTO M 85. SAND SHALL MEET THE REQUIREMENTS OF FINE AGGREGATE AS SPECIFIED IN SECTION 802.02 OF THE STANDARD SPECIFICATIONS. THE SAND CEMENT MIXTURE SHALL CONSIST OF NOT LESS THAN 1.5 SACKS OF PORTLAND CEMENT PER TON OF MATERIAL MIXTURE. THE MIXTURE SHALL CONTAIN SUFFICIENT WATER TO HYDRATE THE CEMENTS. THE SAND CEMENT MIXTURE SHALL BE PLACED IN MAXIMUM 8 INCH THICK LIFTS, LOOSE MEASURE, AND THOROUGHLY RODDED AND TAMPED AROUND BOX TO THOROUGHLY FILL ALL VOIDS.

MEMBRANE WATERPROOFING CONFORMING TO THE REQUIREMENTS OF SECTION 815 OF THE STANDARD SPECIFICATIONS SHALL BE APPLIED TO ALL BOX CULVERT JOINTS.



THE MEMBRANE WATERPROOFING WILL BE REQUIRED ON THE TOP EXTERNAL JOINT AND SHALL EXTEND 1 FOOT DOWN THE SIDES OF THE CULVERT.

IN OUTER BARRELS, ONE WEEP HOLE IS REQUIRED IN EXTERIOR WALLS OF EACH PRECAST CULVERT SECTION. WEEP HOLES SHALL HAVE A MAXIMUM HORIZONTAL SPACING OF 10'-0" IN THE ASSEMBLED CULVERT AND SHALL BE SPACED TO CLEAR ALL REINFORCING STEEL. THE DRAIN OPENING SHALL BE 4" DIAMETER AND SHALL BE PLACED 12" ABOVE THE TOP OF THE BOTTOM SLAB.

DRAINAGE FILL MATERIAL WITH GEOTEXTILE FABRIC IS REQUIRED AT THE EXTERIOR WALLS OF THE ASSEMBLED CULVERT, SEE DETAILS ON THIS DRAWING.

MINIMUM WIDTH SHALL BE 12" (6" ON EACH SIDE OF JOINT). ON MULTIPLE BARREL CULVERTS, MEMBRANE WATERPROOFING SHALL BE APPLIED TO EACH BARREL AS DESCRIBED ABOVE.

WITH THE APPROVAL OF THE ENGINEER, THE CONTRACTOR WILL BE ALLOWED TO SUBSTITUTE, AT NO ADDITIONAL COST TO THE DEPARTMENT, FLOWABLE SELECT MATERIAL CONFORMING TO SECTION 206 OF THE STANDARD SPECIFICATIONS IN LIEU OF LEAN GROUT.

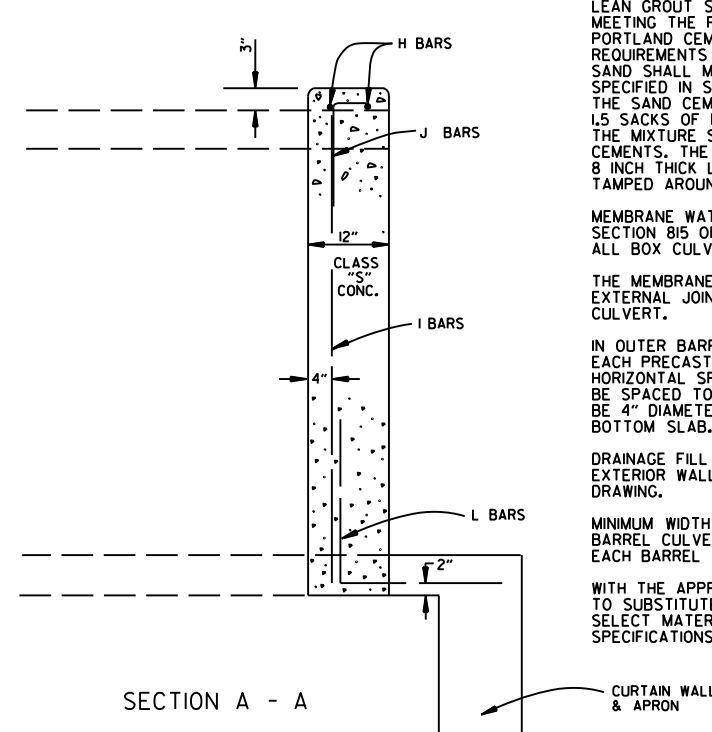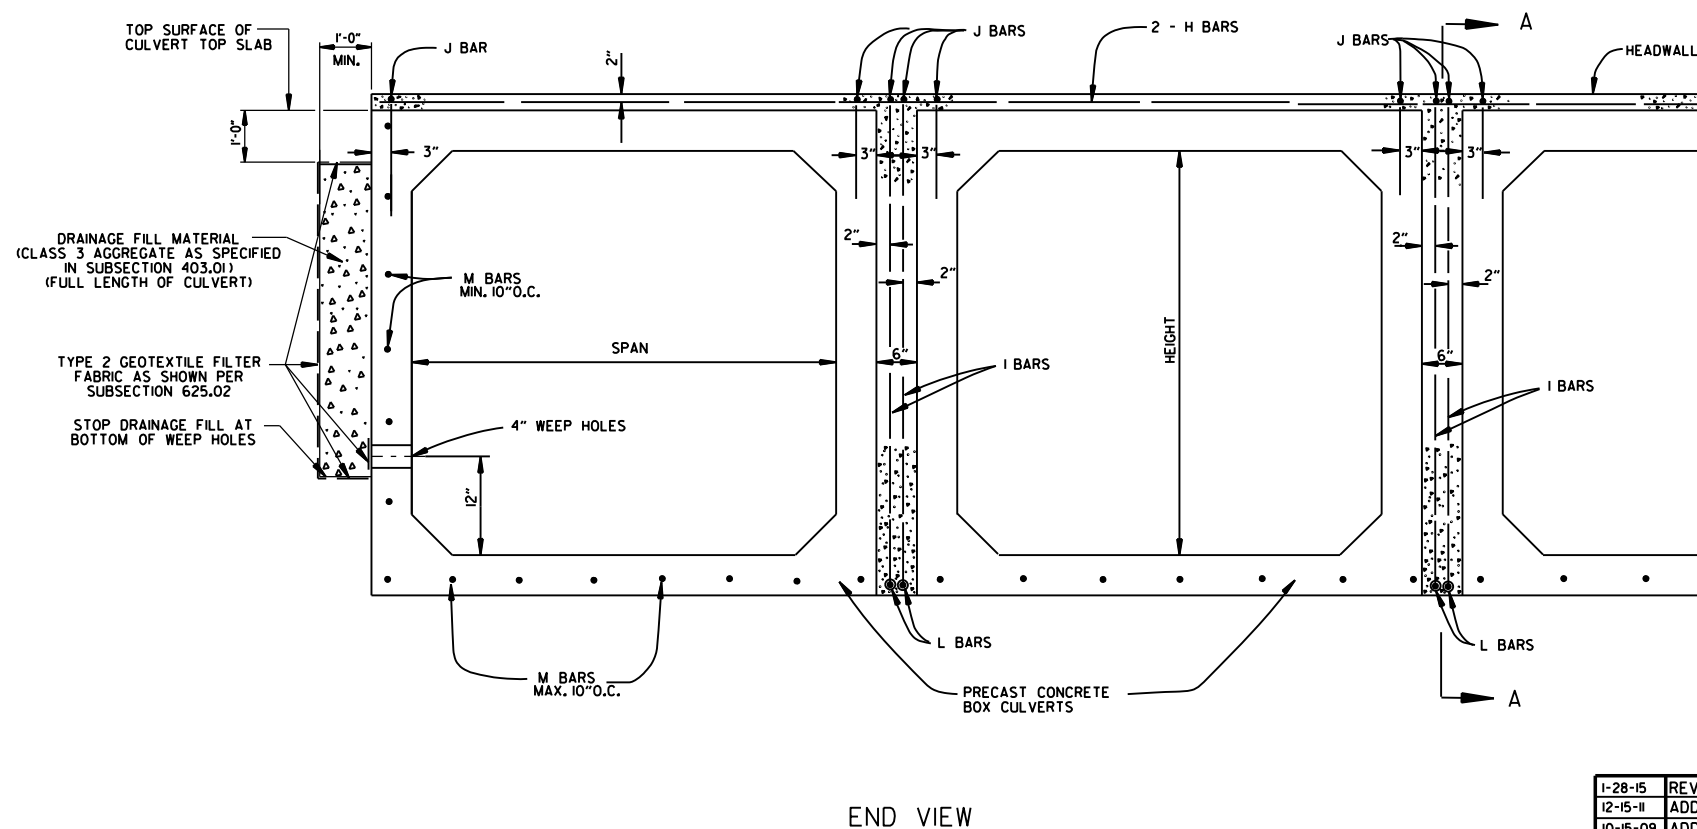

DATE	REVISION	DATE FILMED
1-28-15	REVISED GEOTEXTILE FABRIC PLACEMENT	
12-15-11	ADDED NOTE & DTLS FOR WEEP HOLE AND DRAINAGE FILL	
10-15-09	ADDED GENERAL NOTE	
11-10-05	REVISED SPACING OF \"M\" BARS	
4-10-03	REVISED GENERAL NOTES	
10-18-96	CORRECTED AASHTO REF.	
10-1-92	ADDED NOTE FOR MEMBRANE WATERPROOFING	
8-15-91	ADDED NOTE FOR LEAN GROUT	
11- 8-90	REVISED FOR 1991 SPECS	
11-30-89	ISSUED: JABE	

ARKANSAS STATE HIGHWAY COMMISSION

PRECAST CONCRETE BOX CULVERTS

STANDARD DRAWING PBC-1

REINFORCED CONCRETE
ARCH PIPE DIMENSIONS

EQUIV. DIA.	SPAN		RISE	
	AASHTO M 206	ARDOT NOMINAL	AASHTO M 206	ARDOT NOMINAL
INCHES	INCHES			
15	18	18	11	11
18	22	22	13½	14
21	26	26	15½	16
24	28½	29	18	18
30	36¼	36	22½	23
36	43¾	44	26¾	27
42	51½	51	31¾	31
48	58½	59	36	36
54	65	65	40	40
60	73	73	45	45
72	88	88	54	54
84	102	102	62	62
90	115	115	72	72
96	122	122	77½	77
108	138	138	87½	87
120	154	154	96¾	97
132	168¾	169	106½	107

THE MEASURED SPAN AND RISE SHALL NOT VARY MORE THAN ± 2 PERCENT FROM THE VALUES SPECIFIED BY AASHTO M206.

REINFORCED CONCRETE
HORIZONTAL ELLIPTICAL
PIPE DIMENSIONS

EQUIV. DIA.	AASHTO M 207	
	SPAN	RISE
INCHES	INCHES	
18	23	14
24	30	19
27	34	22
30	38	24
33	42	27
36	45	29
39	49	32
42	53	34
48	60	38
54	68	43
60	76	48
66	83	53
72	91	58
78	98	63
84	106	68

THE MEASURED SPAN AND RISE SHALL NOT VARY MORE THAN ± 2 PERCENT FROM THE VALUES SPECIFIED BY AASHTO M207.

CONSTRUCTION SEQUENCE

1. PLACE STRUCTURAL BEDDING MATERIAL TO GRADE. DO NOT COMPACT.
2. INSTALL PIPE TO GRADE.
3. COMPACT STRUCTURAL BEDDING OUTSIDE THE MIDDLE THIRD OF THE PIPE.
4. PLACE AND COMPACT THE HAUNCH AREA UP TO THE MIDDLE OF THE PIPE.
5. COMPLETE BACKFILL ACCORDING TO SUBSECTION 606.03.(F)(1).

NOTE: HAUNCH AND STRUCTURAL BEDDING MATERIAL WILL NOT BE PAID FOR SEPARATELY, BUT COMPENSATION WILL BE CONSIDERED TO BE INCLUDED IN THE PRICE BID PER LINEAR FOOT OF CONCRETE PIPE.


- LEGEND -

D_i = NORMAL INSIDE DIAMETER OF PIPE
D_o = OUTSIDE DIAMETER OF PIPE
H = FILL COVER HEIGHT OVER PIPE (FEET)
MIN. = MINIMUM
= UNDISTURBED SOIL

INSTALLATION TYPE	MATERIAL REQUIREMENTS FOR HAUNCH AND STRUCTURAL BEDDING
TYPE 1	AGGREGATE BASE COURSE (CLASS 5 OR CLASS 7)
TYPE 2	SELECTED MATERIALS (CLASS SM-1, SM-2, OR SM-4) OR TYPE 1 INSTALLATION MATERIAL*
TYPE 3**	AASHTO CLASSIFICATION A-1 THRU A-6 SOIL OR TYPE 1 OR 2 INSTALLATION MATERIAL

* SM-3 WILL NOT BE ALLOWED.

** MATERIALS SHALL NOT INCLUDE ORGANIC MATERIALS
OR STONES LARGER THAN 3 INCHES.

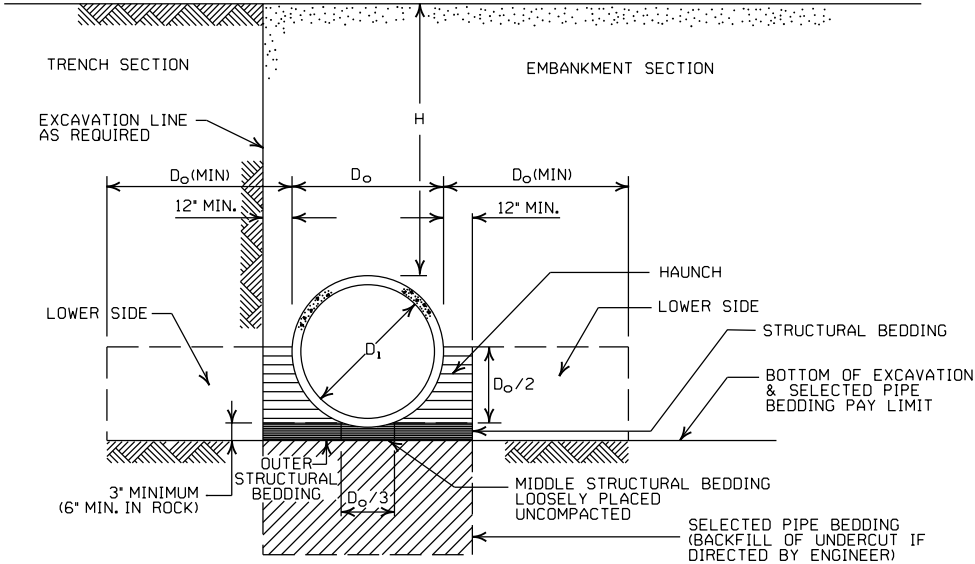

EMBANKMENT AND TRENCH INSTALLATIONS

1. MATERIAL IN THE HAUNCH AND OUTER STRUCTURAL BEDDING SHALL BE COMPACTED TO 95% OF THE MAXIMUM DENSITY ACCORDING TO THE TYPE OR CLASS OF MATERIAL USED.
2. FOR TRENCHES WITH WALLS OF NATURAL SOIL, THE DENSITY OF THE SOIL IN THE LOWER SIDE ZONE SHALL BE AS FIRM AS THE 95% DENSITY REQUIRED FOR THE HAUNCH. IF THE EXISTING SOIL DOES NOT MEET THIS CRITERIA, IT SHALL BE REMOVED AND RECOMPACTED TO 95% OF THE MAXIMUM DENSITY ACCORDING TO THE TYPE OF MATERIAL USED.
3. FOR EMBANKMENTS, THE MATERIAL IN THE LOWER SIDE ZONE SHALL BE COMPACTED TO 95% OF THE MAXIMUM DENSITY ACCORDING TO THE TYPE OR CLASS OF MATERIAL USED.

GENERAL NOTES

1. CONCRETE PIPE CULVERT CONSTRUCTION SHALL CONFORM TO ARKANSAS DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION (CURRENT EDITION), WITH APPLICABLE SUPPLEMENTAL SPECIFICATIONS AND SPECIAL PROVISIONS. UNLESS OTHERWISE NOTED IN THE PLANS, SECTION AND SUBSECTION REFER TO THE STANDARD CONSTRUCTION SPECIFICATIONS.
2. CONCRETE PIPE CULVERT DESIGN SHALL CONFORM TO AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS, FIFTH EDITION (2010) WITH 2010 INTERIMS.
3. ALL PIPE SHALL CONFORM TO SECTION 606. CIRCULAR R.C. PIPE CULVERTS SHALL CONFORM TO AASHTO M170. R.C. ARCH PIPE CULVERTS SHALL CONFORM TO AASHTO M206 AND HORIZONTAL ELLIPTICAL PIPE CULVERTS SHALL CONFORM TO AASHTO M207.
4. ALL PIPE SHALL BE PROTECTED DURING CONSTRUCTION BY A COVER SUFFICIENT TO PREVENT DAMAGE FROM PASSAGE OF EQUIPMENT.
5. THE MINIMUM TRENCH WIDTH SHALL BE THE OUTSIDE DIAMETER OF THE PIPE PLUS 24 INCHES. THE MAXIMUM ALLOWABLE TRENCH WIDTH SHALL BE THE MINIMUM WIDTH PRACTICABLE FOR WORKING CONDITIONS.
6. MULTIPLE PIPE CULVERTS SHALL BE INSTALLED WITH A MINIMUM CLEARANCE OF 24 INCHES BETWEEN STRINGS OF PIPE. REFER TO STD. DWG. FES-2 FOR MINIMUM CLEARANCE WHERE FLARED END SECTIONS ARE USED.
7. IMPERVIOUS MATERIAL SHOULD BE PLACED AS DIRECTED BY THE ENGINEER AT THE ENDS OF THE CULVERT TO PREVENT LOSS OF STRUCTURAL BEDDING WHEN PERVIOUS MATERIAL IS USED FOR STRUCTURAL BEDDING AND/OR BACKFILL.
8. NOT MORE THAN ONE LIFTING HOLE MAY BE PROVIDED IN CONCRETE PIPE TO FACILITATE HANDLING. HOLE MAY BE CAST IN PLACE, CUT INTO THE FRESH CONCRETE AFTER FORMS ARE REMOVED, OR DRILLED. THE HOLE SHALL NOT BE MORE THAN TWO INCHES IN DIAMETER OR TWO INCHES SQUARE. CUTTING OR DISPLACEMENT OF REINFORCEMENT WILL NOT BE PERMITTED. SPALLED AREAS AROUND THE HOLE SHALL BE REPAIRED IN A WORKMANLIKE MANNER. LIFTING HOLE SHALL BE FILLED WITH MORTAR, CONCRETE, OR OTHER METHOD AS APPROVED BY THE ENGINEER.
9. WHEN DIRECTED BY THE ENGINEER, UNSUITABLE MATERIAL THAT IS ENCOUNTERED AT THE BOTTOM OF THE EXCAVATED TRENCH (BELOW THE AREA IDENTIFIED AS "STRUCTURAL BEDDING" ABOVE) WILL BE EXCAVATED AND REPLACED WITH SELECTED PIPE BEDDING. THE QUANTITY OF MATERIAL REQUIRED TO BACKFILL THE UNDERCUT AREA UP TO THE SELECTED PIPE BEDDING PAY LIMIT DESIGNATED ABOVE WILL BE MEASURED AND PAID FOR AS "SELECTED PIPE BEDDING."
10. WHEN THE EXISTING MATERIAL EXCAVATED FOR THE PIPE TRENCH IS DETERMINED BY THE ENGINEER TO BE UNSUITABLE FOR BACKFILLING THE PIPE (ABOVE THE AREA IDENTIFIED ABOVE AS THE HAUNCH), BORROW MATERIAL OR MATERIAL FROM THE ROADWAY EXCAVATION WILL BE USED TO BACKFILL THE PIPE. IF SUITABLE MATERIAL IS NOT AVAILABLE, THE ENGINEER MAY AUTHORIZE THE USE OF "SELECTED PIPE BACKFILL."

MINIMUM HEIGHT OF FILL "H"
OVER CIRCULAR R.C. PIPE CULVERTS

	CLASS OF PIPE			
	CLASS III		CLASS IV	CLASS V
INSTALLATION TYPE	TYPE 1 OR 2	TYPE 3	ALL	ALL
PIPE ID (IN.)	FEET			
12-15	2	2.5	2	1
18-24	2.5	3	2	1
27-33	3	4	2	1
36-42	3.5	5	2	1
48	4.5	5.5	2	1
54-60	5	7	2	1
66-78	6	8	2	1
84-108	7.5	8	2	1

NOTE: FOR MINIMUM COVER VALUES, "H" SHALL INCLUDE A MINIMUM OF 12" OF PAVEMENT AND/OR BASE.

MINIMUM HEIGHT OF FILL "H"
OVER R.C. ARCH & HORIZONTAL
ELLIPTICAL PIPE CULVERTS

INSTALLATION TYPE	CLASS OF PIPE	
	CLASS III	CLASS IV
	FEET	
TYPE 2 OR TYPE 3	2.5	1.5

NOTE: TYPE 1 INSTALLATION WILL NOT BE ALLOWED FOR ARCH & HORIZONTAL ELLIPTICAL PIPE CULVERTS.

NOTE: FOR MINIMUM COVER VALUES, "H" SHALL INCLUDE A MINIMUM OF 12" OF PAVEMENT AND/OR BASE.

MAXIMUM HEIGHT OF
FILL "H" OVER CIRCULAR
R.C. PIPE CULVERTS

INSTALLATION TYPE	CLASS OF PIPE		
	CLASS III	CLASS IV	CLASS V
	FEET		
TYPE 1	21	32	50
TYPE 2	16	25	39
TYPE 3	12	20	30

NOTE: IF FILL HEIGHT EXCEEDS 50 FEET, A SPECIAL DESIGN CONCRETE PIPE WILL BE REQUIRED USING TYPE 1 INSTALLATION.

MAXIMUM HEIGHT OF FILL "H"
OVER R.C. ARCH & HORIZONTAL
ELLIPTICAL PIPE CULVERTS

INSTALLATION TYPE	CLASS OF PIPE	
	CLASS III	CLASS IV
	FEET	
TYPE 2	13	21
TYPE 3	10	16

NOTE: TYPE 1 INSTALLATION WILL NOT BE ALLOWED FOR ARCH & HORIZONTAL ELLIPTICAL PIPE CULVERTS.

2-27-14	REVISED GENERAL NOTE 1.	
12-15-11	REVISED FOR LRFD DESIGN SPECIFICATIONS	
5-18-00	REVISED TYPE 3 BEDDING & ADDED NOTE	
3-30-00	REVISED INSTALLATIONS	
11-06-97	ISSUED	
DATE	REVISION	DATE FILMED

ARKANSAS STATE HIGHWAY COMMISSION

CONCRETE PIPE CULVERT
FILL HEIGHTS & BEDDING

STANDARD DRAWING PCC-1



CORRUGATED STEEL PIPE (ROUND)

PIPE DIAMETER (INCHES)	① MINIMUM COVER TOP OF PIPE TO TOP OF GROUND “H” (FEET)	MAX. FILL HEIGHT “H” ABOVE TOP OF PIPE (FEET)				
		METAL THICKNESS (INCHES)				
		0.064	0.079	0.109	0.138	0.168
2 3/4 INCH BY 1/2 INCH CORRUGATION RIVETED, WELDED, OR HELICAL LOCK-SEAM						
12	1	84	91			
15	1	67	73			
18	1	56	61			
24	1	42	46	59		
30	2	34	36	47		
36	2		30	39	41	
42	2		43	67	70	73
48	2		37	58	61	64
② 3 INCH BY 1 INCH OR 5 INCH BY 1 INCH CORRUGATION RIVETED, WELDED, BOLTED, OR HELICAL LOCK-SEAM						
36	1	48	60	88	111	118
42	1	41	51	72	90	102
48	1	36	45	64	77	85
54	2	32	40	59	71	79
60	2	29	36	53	64	71
66	2	26	33	47	58	64
72	2	24	30	44	53	59
78	2		28	41	49	54
84	2		26	38	45	51
90	2		24	35	43	45
96	2		22	33	40	44
102	2			31	38	42
108	2			30	35	39
114	2			28	34	37
120	2			27	32	35

CORRUGATED ALUMINUM PIPE (ROUND)

PIPE DIAMETER (INCHES)	① MINIMUM COVER TOP OF PIPE TO TOP OF GROUND "H" (FEET)	MAX. FILL HEIGHT "H" ABOVE TOP OF PIPE (FEET)				
		METAL THICKNESS IN INCHES				
		0.060	0.075	0.105	0.135	0.164
		2 3/4 INCH BY 1/2 INCH CORRUGATION RIVETED OR HELICAL LOCK-SEAM				
12	1	45	45			
18	2	30	30	52		
24	2	22	22	39	41	
30	2		18	31	32	34
36	2.5		15	26	27	28
42	2			43	43	44
48	2			40	41	43
54	2			35	37	38
60	2				33	34
66	2					31
72	2					29

CORRUGATED METAL PIPE ARCHES

EQUIV. DIA. (INCHES)	PIPE DIMENSION SPAN X RISE (INCHES)	MINIMUM CORNER RADIUS (INCHES)	STEEL				ALUMINUM			
			MIN. THICKNESS REQUIRED INCHES	① MIN. HEIGHT OF FILL, "H" (FT.)	MAX. HEIGHT OF FILL, "H" (FT.)	MIN. THICKNESS REQUIRED INCHES	① MIN. HEIGHT OF FILL, "H" (FT.)	MAX. HEIGHT OF FILL, "H" (FT.)		
				INSTALLATION	INSTALLATION		INSTALLATION	INSTALLATION		
				TYPE 1	TYPE 1		TYPE 1	TYPE 1		
				2 3/4 INCH BY 1/2 INCH CORRUGATION RIVETED, WELDED, OR HELICAL LOCK-SEAM				2 3/4 INCH BY 1/2 INCH CORRUGATION RIVETED OR HELICAL LOCK-SEAM		
15	17x13	3	0.064	2	15	0.060	2	15		
18	21x15	3	0.064	2	15	0.060	2	15		
21	24x18	3	0.064	2,25	15	0.060	2,25	15		
24	28x20	3	0.064	2,5	15	0.075	2,5	15		
30	35x24	3	0.079	3	12	0.075	3	12		
36	42x29	3 1/2	0.079	3	12	0.105	3	12		
42	49x33	4	0.079	3	12	0.105	3	12		
48	57x38	5	0.109	3	13	0.135	3	13		
54	64x43	6	0.109	3	14	0.135	3	14		
60	71x47	7	0.138	3	15	0.135	3	15		
66	77x52	8	0.168	3	15	① FOR MINIMUM COVER VALUES, "H" SHALL ② WHERE THE STANDARD 2 2/3" x 1/2" COR WITH A 3' x 1' OR 5' x 1' CORRUGATION OR GREATER THAN THE MAXIMUM FILL				
72	83x57	9	0.168	3	15					
			② 3 INCH BY 1 INCH OR 5 INCH BY 1 INCH CORRUGATION RIVETED, WELDED, OR HELICAL LOCK-SEAM							
			INSTALLATION		INSTALLATION					
			TYPE 2	TYPE 1	TYPE 2				TYPE 1	
36	40x31	5	0.079	3	2				12	15
42	46x36	6	0.079	3	2				13	15
48	53x41	7	0.079	3	2				13	15
54	60x46	8	0.079	3	2				13	15
60	66x51	9	0.079	3	2				13	15
66	73x55	12	0.079	3	2	15	15			
72	81x59	14	0.079	3	2	15	15			
78	87x63	14	0.079	3	2	15	15			
84	95x67	16	0.109	3	2	15	15			
90	103x71	16	0.109	3	2	15	15			
96	112x75	18	0.109	3	2	15	15			
102	117x79	18	0.109	3	2	15	15			
108	128x83	18	0.138	3	2	15	15			

CONSTRUCTION SEQUENCE

1. PLACE STRUCTURAL BEDDING MATERIAL TO GRADE. DO NOT COMPACT.
2. INSTALL PIPE TO GRADE.
3. COMPACT STRUCTURAL BEDDING OUTSIDE THE MIDDLE THIRD OF THE PIPE.
4. COMPLETE STRUCTURAL BACKFILL OPERATION BY WORKING FROM SIDE TO SIDE OF THE PIPE. THE SIDE TO SIDE STRUCTURAL BACKFILL DIFFERENTIAL SHALL NOT EXCEED 24 INCHES OR 1/3 THE SIZE OF THE PIPE, WHICHEVER IS LESS.

NOTE: STRUCTURAL BACKFILL AND STRUCTURAL BEDDING MATERIAL WILL NOT BE PAID FOR SEPARATELY, BUT COMPENSATION WILL BE CONSIDERED TO BE INCLUDED IN THE PRICE BID PER LINEAR FOOT OF METAL PIPE.

INSTALLATION TYPE	MATERIAL REQUIREMENTS FOR STRUCTURAL BACKFILL AND STRUCTURAL BEDDING
TYPE 1	AGGREGATE BASE COURSE (CLASS 4, 5, 6, OR 7)
TYPE 2	SELECTED MATERIALS (CLASS SM-1, SM-2, OR SM-4) OR TYPE 1 INSTALLATION MATERIAL ③

③ SM-3 WILL NOT BE ALLOWED.


EQUIVALENT METAL THICKNESSES AND GAUGES

METAL THICKNESS IN INCHES			GAUGE NUMBER
STEEL		ALUMINUM	
ZINC COATED	UNCOATED		
0.064 0.079 0.109 0.138 0.168	0.0598 0.0747 0.1046 0.1345 0.1644		
		0.060 0.075 0.105 0.135 0.164	16 14 12 10 8

- LEGEND -

- D_o = OUTSIDE DIAMETER OF PIPE
MAX. = MAXIMUM
MIN. = MINIMUM
===== = STRUCTURAL BACKFILL MATERIAL
||||||| = UNDISTURBED SOIL
EQUIV. DIA. = EQUIVALENT DIAMETER
H = FILL COVER HEIGHT OVER PIPE (FEET)

IN SOIL-MIN. EQUALS TWICE CORRUGATION DEPTH
IN ROCK-MIN. EQUALS GREATER OF:
1/2" PER FOOT OF FILL OVER PIPE (24" MAX.)
TWICE CORRUGATION DEPTH

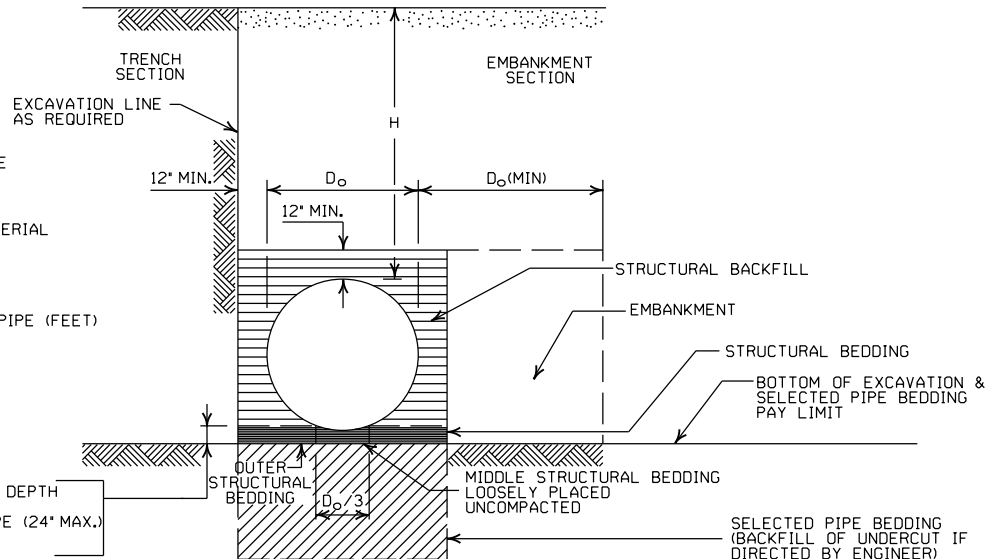

EMBANKMENT AND TRENCH INSTALLATIONS

1. STRUCTURAL BACKFILL, EMBANKMENT, AND OUTER STRUCTURAL BEDDING MATERIAL SHALL BE COMPACTED TO 95% OF THE MAXIMUM DENSITY ACCORDING TO THE TYPE OR CLASS OF MATERIAL USED.
2. INSTALLATION TYPE 1 OR 2 MAY BE USED FOR CORRUGATED STEEL OR ALUMINUM PIPE (ROUND).
3. INSTALLATION TYPE 1 SHALL BE USED FOR CORRUGATED STEEL OR ALUMINUM PIPE ARCHES WITH 2 3/4" X 1/2" CORRUGATION.
4. INSTALLATION TYPE 1 OR 2 MAY BE USED FOR CORRUGATED STEEL OR ALUMINUM PIPE ARCHES WITH 3" X 1" OR 5" X 1" CORRUGATION.

GENERAL NOTES

1. METAL PIPE CULVERT CONSTRUCTION SHALL CONFORM TO ARKANSAS DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION (CURRENT EDITION), WITH APPLICABLE SUPPLEMENTAL SPECIFICATIONS AND SPECIAL PROVISIONS. UNLESS OTHERWISE NOTED IN THE PLANS, SECTION AND SUBSECTION REFER TO THE STANDARD CONSTRUCTION SPECIFICATIONS.
2. METAL PIPE CULVERT DESIGN SHALL CONFORM TO AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS, FIFTH EDITION (2010) WITH 2010 INTERIMS.
3. METAL PIPE CULVERT MATERIALS AND INSTALLATIONS SHALL CONFORM TO SECTION 606 AND JOB SPECIAL PROVISION "METAL PIPE".
4. ALL PIPE SHALL BE PROTECTED DURING CONSTRUCTION BY A COVER SUFFICIENT TO PREVENT DAMAGE FROM PASSAGE OF EQUIPMENT.
5. THE MINIMUM TRENCH WIDTH SHALL BE THE OUTSIDE DIAMETER OF THE PIPE PLUS 24 INCHES. THE MAXIMUM ALLOWABLE TRENCH WIDTH SHALL BE THE MINIMUM WIDTH PRACTICABLE FOR WORKING CONDITIONS.
6. MULTIPLE PIPE CULVERTS SHALL BE INSTALLED WITH A MINIMUM CLEARANCE OF 24 INCHES BETWEEN STRINGS OF PIPE. REFER TO STD. DWG. FES-2 FOR MINIMUM CLEARANCE WHERE FLARED END SECTIONS ARE USED.
7. IMPERVIOUS MATERIAL SHOULD BE PLACED AS DIRECTED BY THE ENGINEER AT THE ENDS OF THE CULVERT TO PREVENT LOSS OF STRUCTURAL BEDDING WHEN PERVIOUS MATERIAL IS USED FOR STRUCTURAL BEDDING AND/OR BACKFILL.
8. WHEN DIRECTED BY THE ENGINEER, UNSUITABLE MATERIAL THAT IS ENCOUNTERED AT THE BOTTOM OF THE EXCAVATED TRENCH (BELOW THE AREA IDENTIFIED AS "STRUCTURAL BEDDING" ABOVE) WILL BE EXCAVATED AND REPLACED WITH SELECTED PIPE BEDDING. THE QUANTITY OF MATERIAL REQUIRED TO BACKFILL THE UNDERCUT AREA UP TO THE SELECTED PIPE BEDDING PAY LIMIT DESIGNATED ABOVE WILL BE MEASURED AND PAID FOR AS "SELECTED PIPE BEDDING."
9. WHEN THE EXISTING MATERIAL EXCAVATED FOR THE PIPE TRENCH IS DETERMINED BY THE ENGINEER TO BE UNSUITABLE FOR BACKFILLING THE PIPE (ABOVE THE AREA IDENTIFIED AS STRUCTURAL BACKFILL), BORROW MATERIAL OR MATERIAL FROM THE ROADWAY EXCAVATION WILL BE USED TO BACKFILL THE PIPE. IF SUITABLE MATERIAL IS NOT AVAILABLE, THE ENGINEER MAY AUTHORIZE THE USE OF "SELECTED PIPE BACKFILL."

① FOR MINIMUM COVER VALUES, "H" SHALL INCLUDE A MINIMUM 12" OF PAVEMENT AND/OR BASE.

② WHERE THE STANDARD 2 2/3" X 1/2" CORRUGATION AND GAUGE IS SPECIFIED FOR A GIVEN DIAMETER, A PIPE OF THE SAME DIAMETER WITH A 3" X 1" OR 5" X 1" CORRUGATION MAY BE SUBSTITUTED, PROVIDING IT IS GAUGED FOR A FILL HEIGHT CONDITION EQUAL TO OR GREATER THAN THE MAXIMUM FILL HEIGHT CONDITION FOR THE SPECIFIED GAUGE AND CORRUGATION.

2-27-14	REVISED GENERAL NOTE 1	
12-15-11	REVISED FOR LRFD DESIGN SPECS	
3-30-00	REVISED INSTALLATIONS	
11-06-97	ISSUED	
DATE	REVISION	DATE FILMED

ARKANSAS STATE HIGHWAY COMMISSION

METAL PIPE CULVERT
FILL HEIGHTS & BEDDING

STANDARD DRAWING PCM-1



INSTALLATION TYPE	•• MATERIAL REQUIREMENTS FOR STRUCTURAL BACKFILL AND STRUCTURAL BEDDING
TYPE 2	•SELECTED MATERIALS (CLASS SM-1, SM-2 OR SM-4)

- AGGREGATE BASE COURSE (CLASS 4, 5, 6, OR 7) MAY BE USED IN LIEU OF SELECTED MATERIAL.
 - SM3 WILL NOT BE ALLOWED.
 - STRUCTURAL BEDDING MATERIAL SHALL HAVE A MAXIMUM PARTICLE SIZE OF 1/2 INCH. STRUCTURAL BACKFILL MATERIAL SHALL BE FREE OF ORGANIC MATERIAL, STONES LARGER THAN 1.50 INCH IN GREATEST DIMENSION, OR FROZEN LUMPS.
- STRUCTURAL BACKFILL AND STRUCTURAL BEDDING MATERIAL WILL NOT BE PAID FOR SEPARATELY, BUT COMPENSATION WILL BE CONSIDERED TO BE INCLUDED IN THE PRICE BID PER LINEAR FOOT OF HDPE PIPE.

MINIMUM TRENCH WIDTH
BASED ON FILL HEIGHT "H"

PIPE DIAMETER	TRENCH WIDTH (FEET)	
	"H" < 10'-0"	"H" ≥ 10'-0"
18"	4'-6"	4'-6"
24"	5'-0"	6'-0"
30"	5'-6"	7'-6"
36"	6'-0"	9'-0"
42"	7'-0"	10'-6"
48"	8'-0"	12'-0"


NOTE:
18" MIN. (18" - 30" DIAMETERS)
24" MIN. (36" - 48" DIAMETERS)
MINIMUM COVER VALUES, "H"
SHALL INCLUDE A MINIMUM 12"
OF PAVEMENT AND/OR BASE.

MULTIPLE INSTALLATION OF
HIGH DENSITY POLYETHYLENE PIPES

PIPE DIAMETER	CLEAR DISTANCE BETWEEN PIPES
18"	1'-6"
24"	2'-0"
30"	2'-6"
36"	3'-0"
42"	3'-6"
48"	4'-0"

PIPE DIAMETER	MIN. COVER (FEET) FOR INDICATED CONSTRUCTION LOADS			
	18.0-50.0 (KIPS)	50.0-75.0 (KIPS)	75.0-110.0 (KIPS)	110.0-175.0 (KIPS)
36" OR LESS	2'-0"	2'-6"	3'-0"	3'-0"
42" OR GREATER	3'-0"	3'-0"	3'-6"	4'-0"

MINIMUM COVER SHALL BE MEASURED FROM TOP OF PIPE TO TOP OF THE MAINTAINED CONSTRUCTION ROADWAY SURFACE. THE SURFACE SHALL BE MAINTAINED.

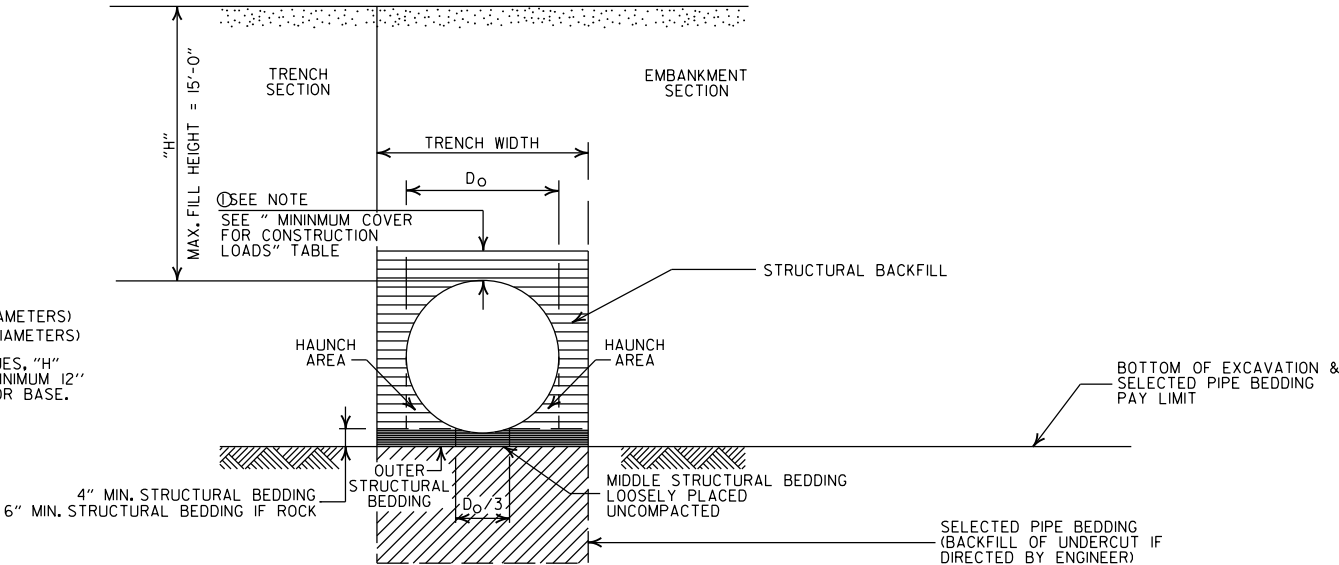

TYPE 2 EMBANKMENT AND TRENCH INSTALLATIONS

- STRUCTURAL BACKFILL, EMBANKMENT, AND OUTER STRUCTURAL BEDDING MATERIAL SHALL BE COMPACTED TO 95% OF THE MAXIMUM DENSITY ACCORDING TO THE TYPE OR CLASS OF MATERIAL USED.

CONSTRUCTION SEQUENCE

- PLACE STRUCTURAL BEDDING MATERIAL TO GRADE. DO NOT COMPACT.
- INSTALL PIPE TO GRADE.
- COMPACT STRUCTURAL BEDDING OUTSIDE THE MIDDLE THIRD OF THE PIPE.
- THE STRUCTURAL BACKFILL SHALL BE PLACED AND COMPACTED IN LAYERS NOT EXCEEDING 8". THE LAYERS SHALL BE BROUGHT UP EVENLY AND SIMULTANEOUSLY TO THE ELEVATION OF THE MINIMUM COVER.
- PIPE INSTALLATION MAY REQUIRE THE USE OF RESTRAINTS, WEIGHTING OR OTHER APPROVED METHODS IN ORDER TO HELP MAINTAIN GRADE AND ALIGNMENT.

- LEGEND -

- H = FILL HEIGHT (FT.)
Do = OUTSIDE DIAMETER OF PIPE
MAX. = MAXIMUM
MIN. = MINIMUM
- ===== = STRUCTURAL BACKFILL MATERIAL
===== = UNDISTURBED SOIL

GENERAL NOTES

- PIPE SHALL CONFORM TO AASHTO M294, TYPE S. INSTALLATION SHALL CONFORM TO JOB SPECIAL PROVISION "PLASTIC PIPE" AND SECTION 606 OF THE STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION (CURRENT EDITION).
- PLASTIC PIPE CULVERT DESIGN SHALL CONFORM TO AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS, FIFTH EDITION (2010) WITH 2010 INTERIMS.
- THE MAXIMUM ALLOWABLE TRENCH WIDTH SHALL BE THE MINIMUM WIDTH PLUS A SUFFICIENT WIDTH TO ENSURE WORKING ROOM TO PROPERLY AND SAFELY PLACE AND COMPACT HAUNCHING AND OTHER BACKFILL MATERIAL.
- IMPERVIOUS MATERIAL SHOULD BE PLACED AS DIRECTED BY THE ENGINEER AT THE ENDS OF THE CULVERT TO PREVENT LOSS OF STRUCTURAL BEDDING WHEN PERVIOUS MATERIAL IS USED FOR STRUCTURAL BEDDING AND/OR BACKFILL.
- WHEN DIRECTED BY THE ENGINEER, UNSUITABLE MATERIAL THAT IS ENCOUNTERED AT THE BOTTOM OF THE EXCAVATED TRENCH (BELOW THE AREA IDENTIFIED AS "STRUCTURAL BEDDING" ABOVE) WILL BE EXCAVATED AND REPLACED WITH SELECTED PIPE BEDDING. THE QUANTITY OF MATERIAL REQUIRED TO BACKFILL THE UNDERCUT AREA UP TO THE SELECTED PIPE BEDDING PAY LIMIT DESIGNATED ABOVE WILL BE MEASURED AND PAID FOR AS "SELECTED PIPE BEDDING."
- WHEN THE EXISTING MATERIAL EXCAVATED FOR THE PIPE TRENCH IS DETERMINED BY THE ENGINEER TO BE UNSUITABLE FOR BACKFILLING THE PIPE (ABOVE THE AREA IDENTIFIED ABOVE AS STRUCTURAL BACKFILL), BORROW MATERIAL OR MATERIAL FROM THE ROADWAY EXCAVATION WILL BE USED TO BACKFILL THE PIPE. IF SUITABLE MATERIAL IS NOT AVAILABLE, THE ENGINEER MAY AUTHORIZE THE USE OF "SELECTED PIPE BACKFILL."
- FOR PIPE TYPES THAT ARE NOT SMOOTH ON THE OUTSIDE (CORRUGATED OR PROFILE WALLS), BACKFILL GRADATIONS SHOULD BE SELECTED THAT WILL PERMIT THE FILLING OF THE CORRUGATION OR PROFILE VALLEY.
- HIGH DENSITY POLYETHYLENE PIPES OF DIAMETERS OTHER THAN SHOWN WILL NOT BE ALLOWED.
- JOINTS FOR HDPE PIPE SHALL MEET THE REQUIREMENTS FOR SOIL TIGHTNESS AS SPECIFIED IN AASHTO SECTION 26.4.2.4 AND 30.4.2 "AASHTO LRFD BRIDGE CONSTRUCTION SPECIFICATIONS." JOINTS SHALL BE INSTALLED PER MANUFACTURER'S RECOMMENDATIONS.

			ARKANSAS STATE HIGHWAY COMMISSION
			PLASTIC PIPE CULVERT (HIGH DENSITY POLYETHYLENE)
			STANDARD DRAWING PCP-1
2-27-14	REVISED GENERAL NOTE 1.		
12-15-11	REVISED GENERAL NOTES & MINIMUM COVER NOTE		
11-17-10	ISSUED		
DATE	REVISION	DATE FILMED	

INSTALLATION TYPE	•• MATERIAL REQUIREMENTS FOR STRUCTURAL BACKFILL AND STRUCTURAL BEDDING
TYPE 2	•SELECTED MATERIALS (CLASS SM-1, SM-2, OR SM-4)

- AGGREGATE BASE COURSE (CLASS 4, 5, 6, OR 7) MAY BE USED IN LIEU OF SELECTED MATERIAL.

SM3 WILL NOT BE ALLOWED.
- STRUCTURAL BEDDING MATERIAL SHALL HAVE A MAXIMUM PARTICLE SIZE OF 1/4 INCH. STRUCTURAL BACKFILL MATERIAL SHALL BE FREE OF ORGANIC MATERIAL, STONES LARGER THAN 1.50 INCH IN GREATEST DIMENSION, OR FROZEN LUMPS.

STRUCTURAL BACKFILL AND STRUCTURAL BEDDING MATERIAL WILL NOT BE PAID FOR SEPARATELY, BUT COMPENSATION WILL BE CONSIDERED TO BE INCLUDED IN THE PRICE BID PER LINEAR FOOT OF PVC PIPE.

MINIMUM TRENCH WIDTH
BASED ON FILL HEIGHT "H"

PIPE DIAMETER	TRENCH WIDTH (FEET)	
	"H" < 10'-0"	"H" ≥ 10'-0"
18"	4'-6"	4'-6"
24"	5'-0"	6'-0"
30"	5'-6"	7'-6"
36"	6'-0"	9'-0"


MULTIPLE INSTALLATION OF
PVC PIPES

PIPE DIAMETER	CLEAR DISTANCE BETWEEN PIPES
18"	1'-6"
24"	2'-0"
30"	2'-6"
36"	3'-0"

MAXIMUM FILL HEIGHT
BASED ON STRUCTURAL BACKFILL

PIPE DIAMETER	"H"
18"	45'-0"
24"	45'-0"
30"	40'-0"
36"	40'-0"

- ① NOTE:
12" MIN. (18" - 36" DIAMETERS)
MINIMUM COVER VALUE, "H"
SHALL INCLUDE A MINIMUM 12"
OF PAVEMENT AND/OR BASE.

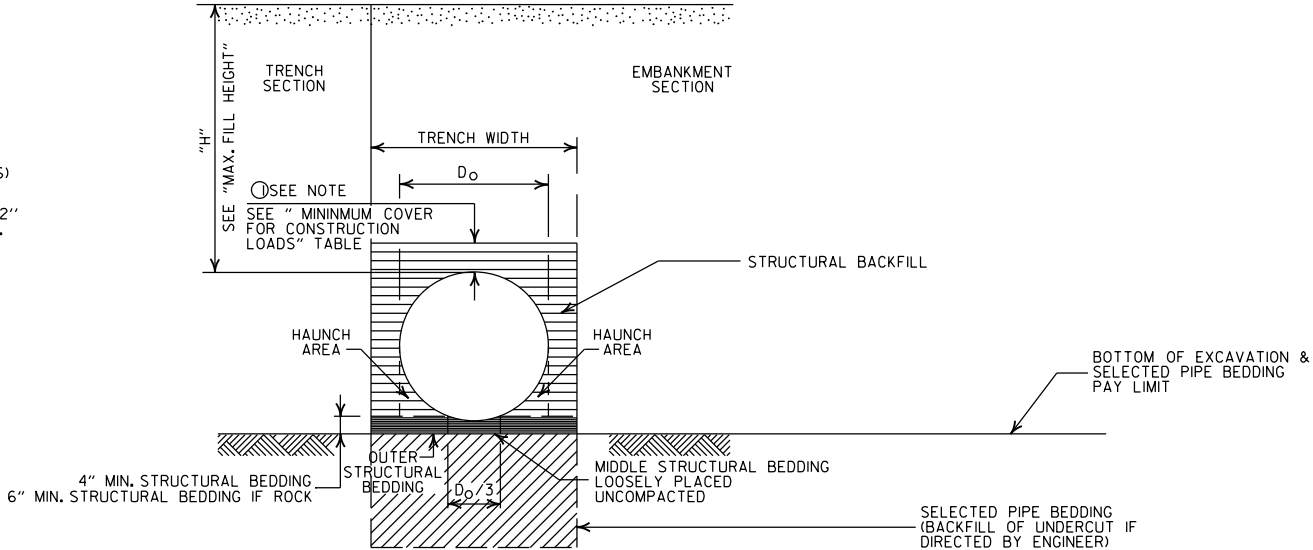

TYPE 2 EMBANKMENT AND TRENCH INSTALLATIONS

1. STRUCTURAL BACKFILL, EMBANKMENT, AND OUTER STRUCTURAL BEDDING MATERIAL SHALL BE COMPACTED TO 95% OF THE MAXIMUM DENSITY ACCORDING TO THE TYPE OR CLASS OF MATERIAL USED.

CONSTRUCTION SEQUENCE

1. PLACE STRUCTURAL BEDDING MATERIAL TO GRADE. DO NOT COMPACT.
2. INSTALL PIPE TO GRADE.
3. COMPACT STRUCTURAL BEDDING OUTSIDE THE MIDDLE THIRD OF THE PIPE.
4. THE STRUCTURAL BACKFILL SHALL BE PLACED AND COMPACTED IN LAYERS NOT EXCEEDING 8". THE LAYERS SHALL BE BROUGHT UP EVENLY AND SIMULTANEOUSLY TO THE ELEVATION OF THE MINIMUM COVER.
5. PIPE INSTALLATION MAY REQUIRE THE USE OF RESTRAINTS, WEIGHTING OR OTHER APPROVED METHODS IN ORDER TO HELP MAINTAIN GRADE AND ALIGNMENT.

- LEGEND -

H = FILL HEIGHT (FT.)
D_o = OUTSIDE DIAMETER OF PIPE
MAX. = MAXIMUM
MIN. = MINIMUM

===== = STRUCTURAL BACKFILL MATERIAL
||||||| = UNDISTURBED SOIL

GENERAL NOTES

1. PIPE SHALL CONFORM TO ASTM F949, CELL CLASS 12454. INSTALLATION SHALL CONFORM TO JOB SPECIAL PROVISION "PLASTIC PIPE" AND SECTION 606 OF THE STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION (CURRENT EDITION).
2. PLASTIC PIPE CULVERT DESIGN SHALL CONFORM TO AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS, FIFTH EDITION (2010) WITH 2010 INTERIMS.
3. THE MAXIMUM ALLOWABLE TRENCH WIDTH SHALL BE THE MINIMUM WIDTH PLUS A SUFFICIENT WIDTH TO ENSURE WORKING ROOM TO PROPERLY PLACE AND COMPACT HAUNCHING AND OTHER BACKFILL MATERIAL.
4. IMPERVIOUS MATERIAL SHOULD BE PLACED AS DIRECTED BY THE ENGINEER AT THE ENDS OF THE CULVERT TO PREVENT LOSS OF STRUCTURAL BEDDING WHEN PERVIOUS MATERIAL IS USED FOR STRUCTURAL BEDDING AND/OR BACKFILL.
5. WHEN DIRECTED BY THE ENGINEER, UNSUITABLE MATERIAL THAT IS ENCOUNTERED AT THE BOTTOM OF THE EXCAVATED TRENCH (BELOW THE AREA IDENTIFIED AS "STRUCTURAL BEDDING" ABOVE) WILL BE EXCAVATED AND REPLACED WITH SELECTED PIPE BEDDING. THE QUANTITY OF MATERIAL REQUIRED TO BACKFILL THE UNDERCUT AREA UP TO THE SELECTED PIPE BEDDING PAY LIMIT DESIGNATED ABOVE WILL BE MEASURED AND PAID FOR AS "SELECTED PIPE BEDDING."
6. WHEN THE EXISTING MATERIAL EXCAVATED FOR THE PIPE TRENCH IS DETERMINED BY THE ENGINEER TO BE UNSUITABLE FOR BACKFILLING THE PIPE (ABOVE THE AREA IDENTIFIED ABOVE AS STRUCTURAL BACKFILL), BORROW MATERIAL OR MATERIAL FROM THE ROADWAY EXCAVATION WILL BE USED TO BACKFILL THE PIPE. IF SUITABLE MATERIAL IS NOT AVAILABLE, THE ENGINEER MAY AUTHORIZE THE USE OF "SELECTED PIPE BACKFILL."
7. FOR PIPE TYPES THAT ARE NOT SMOOTH ON THE OUTSIDE (CORRUGATED OR PROFILE WALLS), BACKFILL GRADATIONS SHOULD BE SELECTED THAT WILL PERMIT THE FILLING OF THE CORRUGATION OR PROFILE VALLEY.
8. PVC PIPES OF DIAMETERS OTHER THAN SHOWN WILL NOT BE ALLOWED.
9. JOINTS FOR PVC PIPE SHALL MEET THE REQUIREMENTS FOR SOIL TIGHTNESS AS SPECIFIED IN AASHTO SECTION 26.4.2.4 AND 30.4.2 "AASHTO LRFD BRIDGE CONSTRUCTION SPECIFICATIONS." JOINTS SHALL BE INSTALLED PER MANUFACTURER'S RECOMMENDATIONS.

2-27-14	REVISED GENERAL NOTE 1.	
12-15-11	REV GENERAL NOTES & MINIMUM COVER NOTE; DELETED SM3 MATERIAL	
11-17-10	ISSUED	
DATE	REVISION	DATE FILMED

ARKANSAS STATE HIGHWAY COMMISSION

PLASTIC PIPE CULVERT
(PVC F949)

STANDARD DRAWING PCP-2



INSTALLATION TYPE	**MATERIAL REQUIREMENTS FOR STRUCTURAL BACKFILL AND STRUCTURAL BEDDING
TYPE 1	AGGREGATE BASE COURSE (CLASS 4, 5, 6, OR 7)
TYPE 2	*SELECTED MATERIALS (CLASS SM-1, SM-2 OR SM-4) OR TYPE 1 INSTALLATION MATERIAL

* SM3 WILL NOT BE ALLOWED.

** STRUCTURAL BEDDING MATERIAL SHALL HAVE A MAXIMUM PARTICLE SIZE OF 1 INCH. STRUCTURAL BACKFILL MATERIAL SHALL BE FREE OF ORGANIC MATERIAL, STONES LARGER THAN 1.50 INCH IN GREATEST DIMENSION, OR FROZEN LUMPS.

STRUCTURAL BACKFILL AND STRUCTURAL BEDDING MATERIAL WILL NOT BE PAID FOR SEPARATELY, BUT COMPENSATION WILL BE CONSIDERED TO BE INCLUDED IN THE PRICE BID PER LINEAR FOOT OF POLYPROPYLENE PIPE.

MULTIPLE INSTALLATION OF POLYPROPYLENE PIPES

PIPE DIAMETER	CLEAR DISTANCE BETWEEN PIPES
18"	1'-6"
24"	2'-0"
30"	2'-6"
36"	3'-0"
42"	3'-6"
48"	4'-0"
60"	5'-0"

MINIMUM TRENCH WIDTH BASED ON FILL HEIGHT "H"


PIPE DIAMETER	TRENCH WIDTH (FEET)	
	"H" < 10'-0"	"H" >OR= 10'-0"
18"	4'-6"	4'-6"
24"	5'-0"	6'-0"
30"	5'-6"	7'-6"
36"	6'-0"	9'-0"
42"	7'-0"	10'-6"
48"	8'-0"	12'-0"
60"	10'-0"	15'-0"

①NOTE:
12" MIN. (18" - 42" DIAMETERS)
24" MIN. (60" DIAMETER)
MINIMUM COVER VALUES, "H" SHALL INCLUDE A MINIMUM 12" OF PAVEMENT AND/OR BASE.

MINIMUM COVER FOR CONSTRUCTION LOADS

PIPE DIAMETER	② MIN. COVER (FEET) FOR INDICATED CONSTRUCTION LOADS			
	18.0-50.0 (KIPS)	50.0-75.0 (KIPS)	75.0-110.0 (KIPS)	110.0-150.0 (KIPS)
36" OR LESS	2'-0"	2'-6"	3'-0"	3'-0"
42" OR GREATER	3'-0"	3'-0"	3'-6"	4'-0"

②MINIMUM COVER SHALL BE MEASURED FROM TOP OF PIPE TO TOP OF THE MAINTAINED CONSTRUCTION ROADWAY SURFACE. THE SURFACE SHALL BE MAINTAINED.

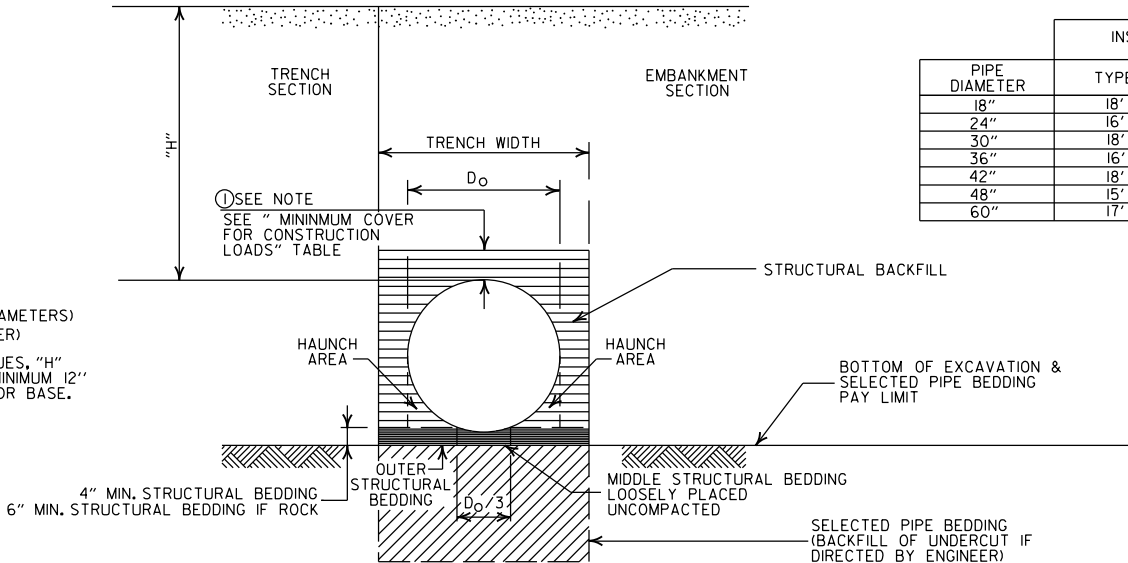

EMBANKMENT AND TRENCH INSTALLATIONS

1. STRUCTURAL BACKFILL, EMBANKMENT, AND OUTER STRUCTURAL BEDDING MATERIAL SHALL BE COMPACTED TO 95% OF THE MAXIMUM DENSITY ACCORDING TO THE TYPE OR CLASS OF MATERIAL USED.

CONSTRUCTION SEQUENCE

1. PLACE STRUCTURAL BEDDING MATERIAL TO GRADE. DO NOT COMPACT.
2. INSTALL PIPE TO GRADE.
3. COMPACT STRUCTURAL BEDDING OUTSIDE THE MIDDLE THIRD OF THE PIPE.
4. THE STRUCTURAL BACKFILL SHALL BE PLACED AND COMPACTED IN LAYERS NOT EXCEEDING 8". THE LAYERS SHALL BE BROUGHT UP EVENLY AND SIMULTANEOUSLY TO THE ELEVATION OF THE MINIMUM COVER.
5. PIPE INSTALLATION MAY REQUIRE THE USE OF RESTRAINTS, WEIGHTING OR OTHER APPROVED METHODS IN ORDER TO HELP MAINTAIN GRADE AND ALIGNMENT.

GENERAL NOTES

1. PIPE SHALL CONFORM TO AASHTO M330, TYPE S. INSTALLATION SHALL CONFORM TO JOB SPECIAL PROVISION "PLASTIC PIPE" AND SECTION 606 OF THE STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION (CURRENT EDITION).
2. PLASTIC PIPE CULVERT DESIGN SHALL CONFORM TO AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS, SIXTH EDITION (2012) WITH 2013 INTERIMS.
3. THE MAXIMUM ALLOWABLE TRENCH WIDTH SHALL BE THE MINIMUM WIDTH PLUS A SUFFICIENT WIDTH TO ENSURE WORKING ROOM TO PROPERLY AND SAFELY PLACE AND COMPACT HAUNCHING AND OTHER BACKFILL MATERIAL.
4. IMPERVIOUS MATERIAL SHOULD BE PLACED AS DIRECTED BY THE ENGINEER AT THE ENDS OF THE CULVERT TO PREVENT LOSS OF STRUCTURAL BEDDING WHEN PERVIOUS MATERIAL IS USED FOR STRUCTURAL BEDDING AND/OR BACKFILL.
5. WHEN DIRECTED BY THE ENGINEER, UNSUITABLE MATERIAL THAT IS ENCOUNTERED AT THE BOTTOM OF THE EXCAVATED TRENCH (BELOW THE AREA IDENTIFIED AS "STRUCTURAL BEDDING" ABOVE) WILL BE EXCAVATED AND REPLACED WITH SELECTED PIPE BEDDING. THE QUANTITY OF MATERIAL REQUIRED TO BACKFILL THE UNDERCUT AREA UP TO THE SELECTED PIPE BEDDING PAY LIMIT DESIGNATED ABOVE WILL BE MEASURED AND PAID FOR AS "SELECTED PIPE BEDDING."
6. WHEN THE EXISTING MATERIAL EXCAVATED FOR THE PIPE TRENCH IS DETERMINED BY THE ENGINEER TO BE UNSUITABLE FOR BACKFILLING THE PIPE (ABOVE THE AREA IDENTIFIED ABOVE AS STRUCTURAL BACKFILL), BORROW MATERIAL OR MATERIAL FROM THE ROADWAY EXCAVATION WILL BE USED TO BACKFILL THE PIPE, IF SUITABLE MATERIAL IS NOT AVAILABLE, THE ENGINEER MAY AUTHORIZE THE USE OF "SELECTED PIPE BACKFILL."
7. FOR PIPE TYPES THAT ARE NOT SMOOTH ON THE OUTSIDE (CORRUGATED OR PROFILE WALLS), BACKFILL GRADATIONS SHOULD BE SELECTED THAT WILL PERMIT THE FILLING OF THE CORRUGATION OR PROFILE VALLEY.
8. POLYPROPYLENE PIPES OF DIAMETERS OTHER THAN SHOWN WILL NOT BE ALLOWED.
9. JOINTS FOR POLYPROPYLENE PIPE SHALL MEET THE REQUIREMENTS FOR SOIL TIGHTNESS AS SPECIFIED IN SECTION 26.4.2.4 AND 30.4.2 OF THE AASHTO LRFD BRIDGE CONSTRUCTION SPECIFICATIONS 3RD EDITION (2010) WITH 2012 INTERIMS. JOINTS SHALL BE INSTALLED PER MANUFACTURER'S RECOMMENDATIONS.

- LEGEND -

H = FILL HEIGHT (FT.)
D_o = OUTSIDE DIAMETER OF PIPE
MAX. = MAXIMUM
MIN. = MINIMUM

===== = STRUCTURAL BACKFILL MATERIAL
||||||| = UNDISTURBED SOIL



02-27-20	REVISED	
11-07-19	ISSUED	
DATE	REVISION	DATE FILMED

ARKANSAS STATE HIGHWAY COMMISSION


PLASTIC PIPE CULVERT
(POLYPROPYLENE)

STANDARD DRAWING PCP-3




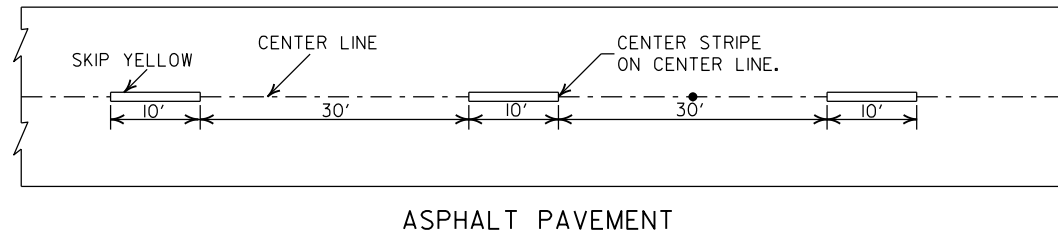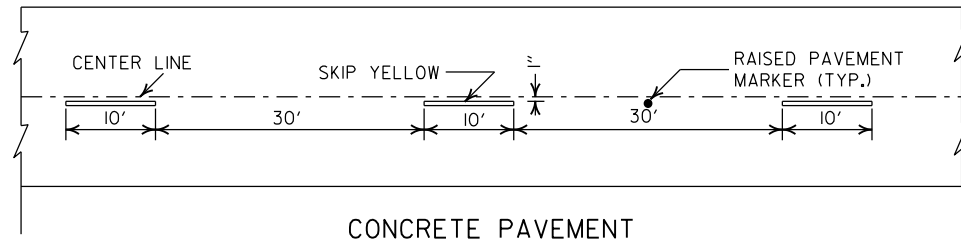



BROKEN LINE STRIPING

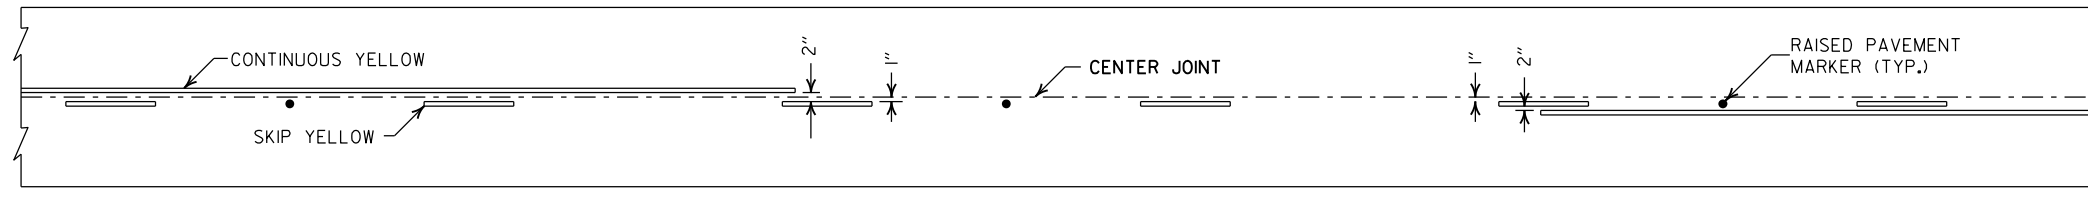

SOLID LINE STRIPING ON CONCRETE PAVEMENT

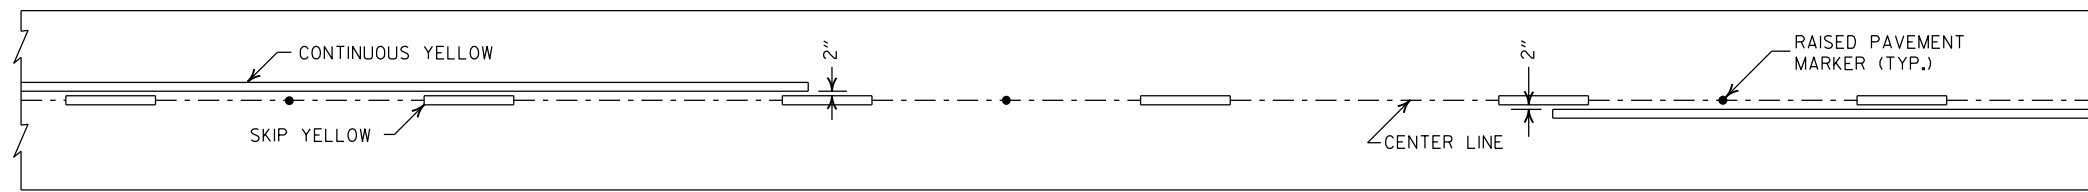


SOLID LINE STRIPING ON ASPHALT PAVEMENT

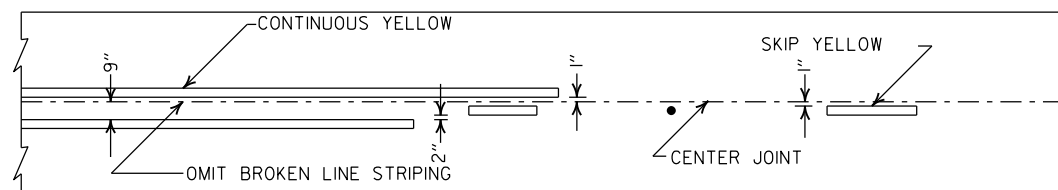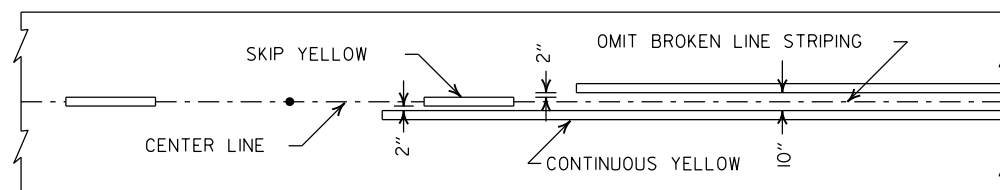


ASPHALT PAVEMENT

CONCRETE PAVEMENT

STRIPING AT ADJACENT NO PASSING LANES

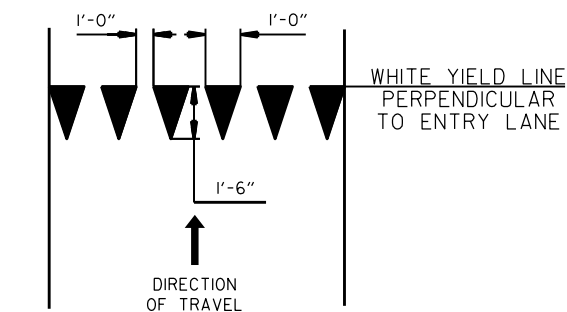

YIELD LINE DETAIL

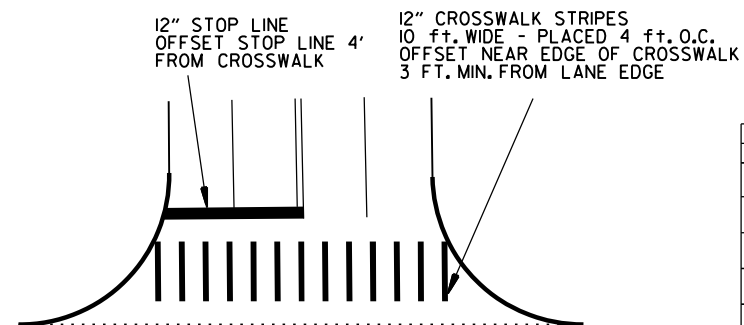


CROSSWALK AND STOP LINE DETAILS

NOTES:


1. REFER TO THE STRIPING DETAILS FOR PAVEMENT MARKING LINE WIDTHS.
2. THIS DRAWING SHALL BE USED IN CONJUNCTION WITH THE LATEST REVISED ADDITION OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES."
3. RAISED PAVEMENT MARKERS SHALL BE PLACED ON AN 80 FEET SPACING UNLESS OTHERWISE SHOWN IN THE PLANS.

2" FOR ASPHALT OR CONCRETE PAVEMENT
6" FOR BITUMINOUS SURFACE TREATMENT

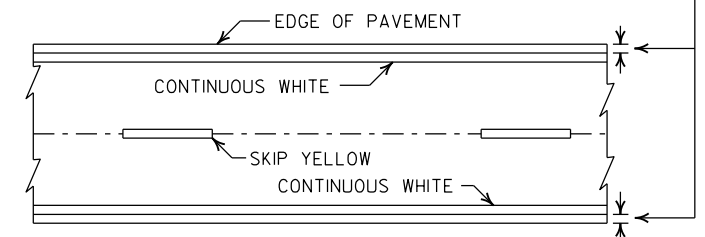


PAVEMENT EDGE LINE MARKING

NOTE:
THE RED LENS OF THE
TYPE II R.P.M. SHALL
FACE THE INCORRECT
TRAFFIC MOVEMENT.

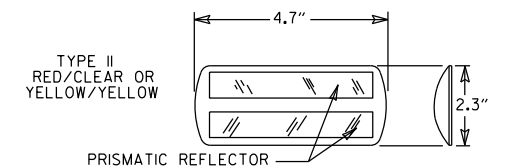

NOTE:
DIMENSIONS SHOWN FOR RAISED PAVEMENT
MARKERS ARE TYPICAL. THE CONTRACTOR
MAY SUBSTITUTE SIMILAR MARKERS WITH
THE APPROVAL OF THE ENGINEER. REQUESTING
APPROVAL FOR SIMILAR MARKERS MAY BE
MADE BY REFERRING TO THE ARDOT QUALIFIED
PRODUCTS LIST.



DETAIL OF STANDARD RAISED PAVEMENT MARKERS

2-27-20	REVISED STOP LINE DETAILS	
6-1-17	ADDED YIELD LINE DETAIL	
5-12-16	REVISED LINE WIDTHS, SPACING, & NOTES	
9-12-13	REVISED DETAIL OF STANDARD RAISED PAVEMENT MARKERS	
11-17-10	REVISED GENERAL NOTES & REMOVED PLOWABLE PVMT MRKRS	
11-18-04	REVISED NOTE 2 & GENERAL NOTES	
8-22-02	ADDED CROSSWALK & STOPBAR DTLS.	
7-02-98	ADDED DETAILS OF STD. RAISED PAV'T. MARKERS	
4-26-96	REV. NOTES 3&4; ADDED R.P.M.	
9-30-80	DRAWN	1-9-30-80
DATE	REVISION	FILMED

ARKANSAS STATE HIGHWAY COMMISSION


PAVEMENT MARKING DETAILS

STANDARD DRAWING PM-1

STEEL FABRICATION: REINFORCING STEEL FABRICATION SHALL CONFORM TO THE DIMENSIONS LISTED IN THE TABLE BELOW:

BAR SIZE	PIN DIAMETER	HOOK EXTENSION "K"
3	2 1/4"	4"
4	3 "	4 1/2"
5	3 3/4"	5"
6	4 1/2"	6"
7	5 1/4"	7"
8	6"	8"

IF THE OVERALL HEIGHT OF THE HOOK (SEE DIAGRAM BELOW) FOR A "b", "bl", "b2" or "b3" BENT BAR IS GREATER THAN THE CORRESPONDING TOP OR BOTTOM SLAB THICKNESS, LESS 2 3/4 INCHES, EACH BENT BAR SHALL BE REPLACED WITH ONE HOOKED BAR AND ONE STRAIGHT BAR, USING LENGTHS AS SHOWN IN THE TABLE BELOW. THE TWO BARS SHALL BE THE SAME DIAMETER AS, AND PLACED AT THE SAME SPACING AS, THE "b", "bl", "b2" OR "b3" BENT BARS THEY REPLACE.

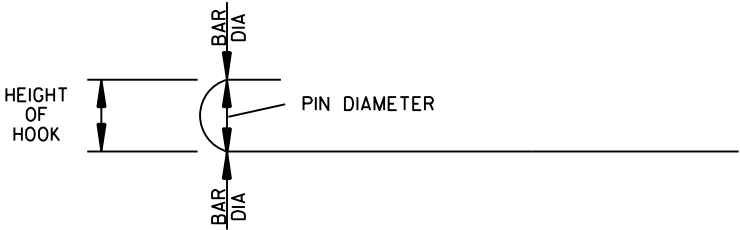

NOTE: DIMENSIONS OF BARS ARE MEASURED OUT TO OUT OF BARS.

OVERALL HEIGHT OF HOOKED BAR DIAGRAM


THE HOOKED BARS SHALL BE PLACED IN THE BOTTOM OF THE TOP SLAB AND THE TOP OF THE BOTTOM SLAB. THE STRAIGHT BARS SHALL BE PLACED IN THE TOP OF THE TOP SLAB AND THE BOTTOM OF THE BOTTOM SLAB. SEE TABLE BELOW FOR LENGTHS OF REPLACEMENT HOOKED AND STRAIGHT BARS.

FOR SKEWED CULVERTS, THE REPLACEMENT STRAIGHT BAR MAY HAVE TO BE CUT IN FIELD TO FIT.

REPLACEMENT BAR LENGTHS TABLE

BAR SIZE: "b", "bl", "b2" OR "b3"	LENGTH OF HOOKED BAR	LENGTH OF STRAIGHT BAR
#4	L + 1' - 0"	SEE "c" BAR LENGTH
#5	L + 1' - 2"	SEE "c" BAR LENGTH
#6	L + 1' - 4"	SEE "c" BAR LENGTH
#7	L + 1' - 8"	SEE "c" BAR LENGTH
#8	L + 1' - 10"	SEE "c" BAR LENGTH
#9	L + 2' - 6"	SEE "c" BAR LENGTH

L = "OW" - 3 INCHES

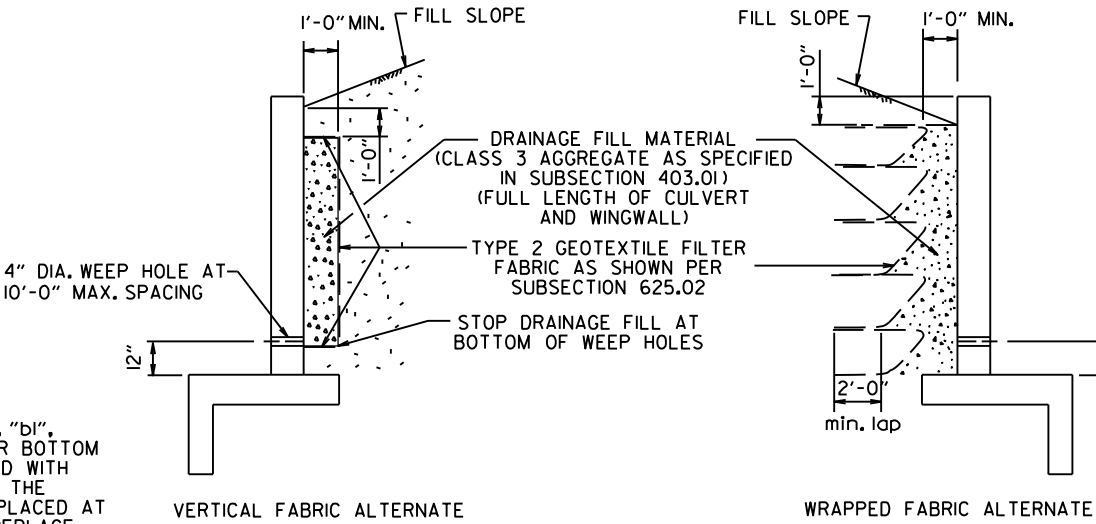

WINGWALL & CULVERT DRAINAGE DETAIL

REINFORCED CONCRETE BOX CULVERT GENERAL NOTES

CONCRETE SHALL BE CLASS S WITH A MINIMUM 28 DAY COMPRESSIVE STRENGTH OF 3500 PSI.

REINFORCING STEEL SHALL BE AASHTO M 31OR M 53, GRADE 60.

CONSTRUCTION AND MATERIALS FOR WINGWALL & CULVERT DRAINAGE, INCLUDING WEEP HOLES AND GRANULAR MATERIAL, SHALL BE SUBSIDIARY TO THE BID ITEM, "CLASS S CONCRETE".

MEMBRANE WATERPROOFING SHALL CONFORM TO THE REQUIREMENTS OF SECTION 815 OF THE STANDARD SPECIFICATIONS.


MEMBRANE WATERPROOFING SHALL BE APPLIED TO ALL CONSTRUCTION JOINTS IN THE TOP SLAB AND THE SIDEWALLS OF R.C. BOX CULVERTS AS DIRECTED BY THE ENGINEER. NO PAYMENT SHALL BE MADE FOR THIS ITEM, BUT PAYMENT WILL BE CONSIDERED TO BE INCLUDED IN THE VARIOUS ITEMS BID FOR THE R.C. BOX CULVERT.

REINFORCING STEEL TOLERANCES: THE TOLERANCES FOR REINFORCING STEEL SHALL MEET THOSE LISTED IN "MANUAL OF STANDARD PRACTICE" PUBLISHED BY CONCRETE REINFORCING STEEL INSTITUTE (CRSI) EXCEPT THAT THE TOLERANCE FOR TRUSS BARS SUCH AS FIGURE 3 ON PAGE 7-4 OF THE CRSI MANUAL SHALL BE MINUS ZERO TO PLUS 1/2 INCH.

WEEP HOLES IN BOX CULVERT WALLS SHALL HAVE A MAXIMUM HORIZONTAL SPACING OF 10'-0" AND SHALL BE SPACED TO CLEAR ALL REINFORCING STEEL. THE DRAIN OPENING SHALL BE 4" DIAMETER AND SHALL BE PLACED 12" ABOVE THE TOP OF THE BOTTOM SLAB.

WEEP HOLES IN WINGWALLS SHALL HAVE A MAXIMUM HORIZONTAL SPACING OF 10'-0" AND SHALL BE SPACED TO CLEAR ALL REINFORCING STEEL. THERE SHALL BE A MINIMUM OF TWO (2) WEEP HOLES IN EACH WINGWALL. THE DRAIN OPENING SHALL BE 4" DIAMETER AND SHALL BE PLACED 12" ABOVE THE TOP OF THE WINGWALL FOOTING.




THE REQUIREMENTS SHOWN ON THIS DRAWING SHALL SUPERCEDE THE CORRESPONDING REQUIREMENTS ON ALL REINFORCED CONCRETE BOX CULVERT STANDARD DRAWINGS.

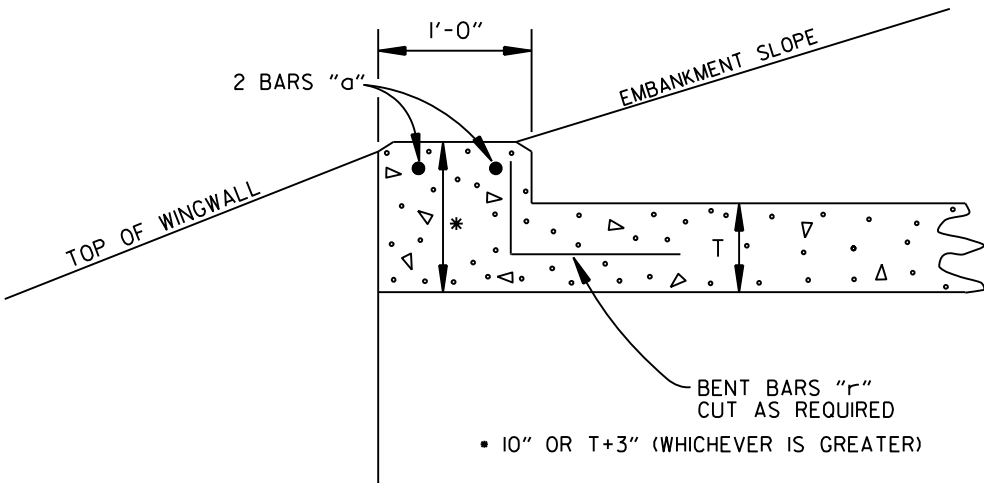



NOTE: FOR ALL SKEWED R.C. BOX CULVERTS THE LENGTH "K" OF THE MODIFIED HEADWALL SHALL BE EQUAL TO THE ROADWAY LENGTH "RL". THE ENDS OF THE HEADWALL SHALL BE CONSTRUCTED PARALLEL TO THE SKEW ANGLE OF THE BOX CULVERT.

R.C. BOX CULVERT HEADWALL MODIFICATIONS



7/26/12	REV. DRAINAGE FILL MATERIAL & DETAIL		ARKANSAS STATE HIGHWAY COMMISSION
12/15/11	REQUIRE WEEP HOLES IN BOX CULVERT WALLS		
5-25-06	REV. GEN. NOTES AND DETAILS FOR WEEP HOLES; BAR DIAGRAM		
11-16-01	ADDED WINGWALL DRAINAGE DETAIL/EDITED GEN. NOTES		REINFORCED CONCRETE BOX CULVERT DETAILS
10-18-96	REV. ASTM REF. TO AASHTO & ADDED BAR DIAGRAM		
10-12-95	MOVED SOLID SODDING DETAIL TO RCB-2		
6-2-94	ADDED SOLID SODDING PLAN DETAIL		STANDARD DRAWING RCB-1
8-5-93	REVISED PIN DIAMETER TO SPECS.		
8-15-91	DRAWN AND ISSUED		
DATE	REVISION	DATE FILMED	

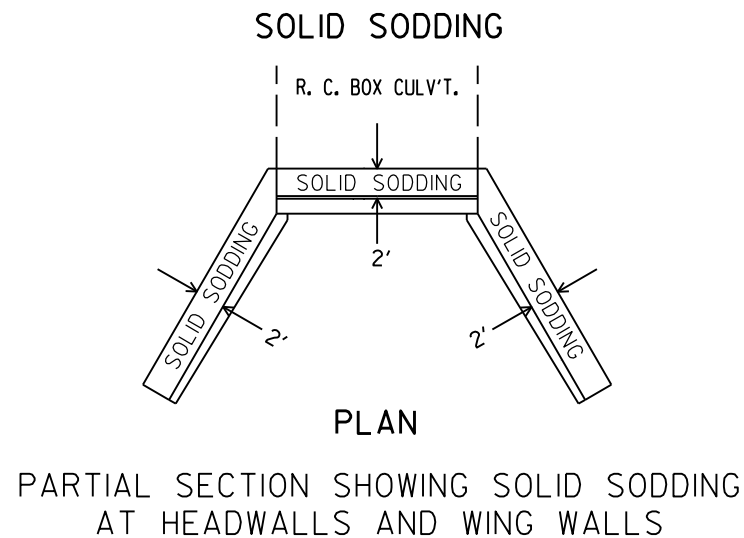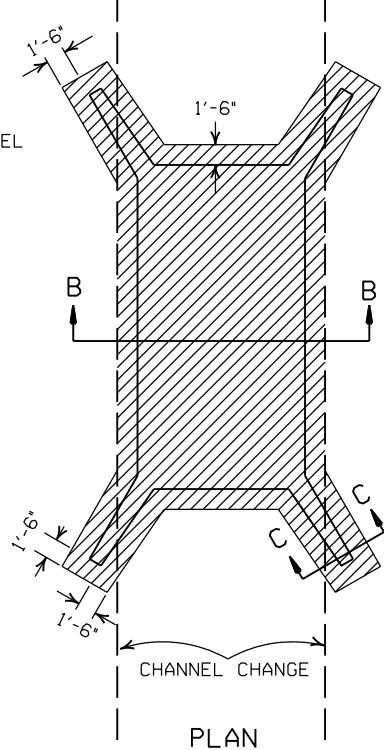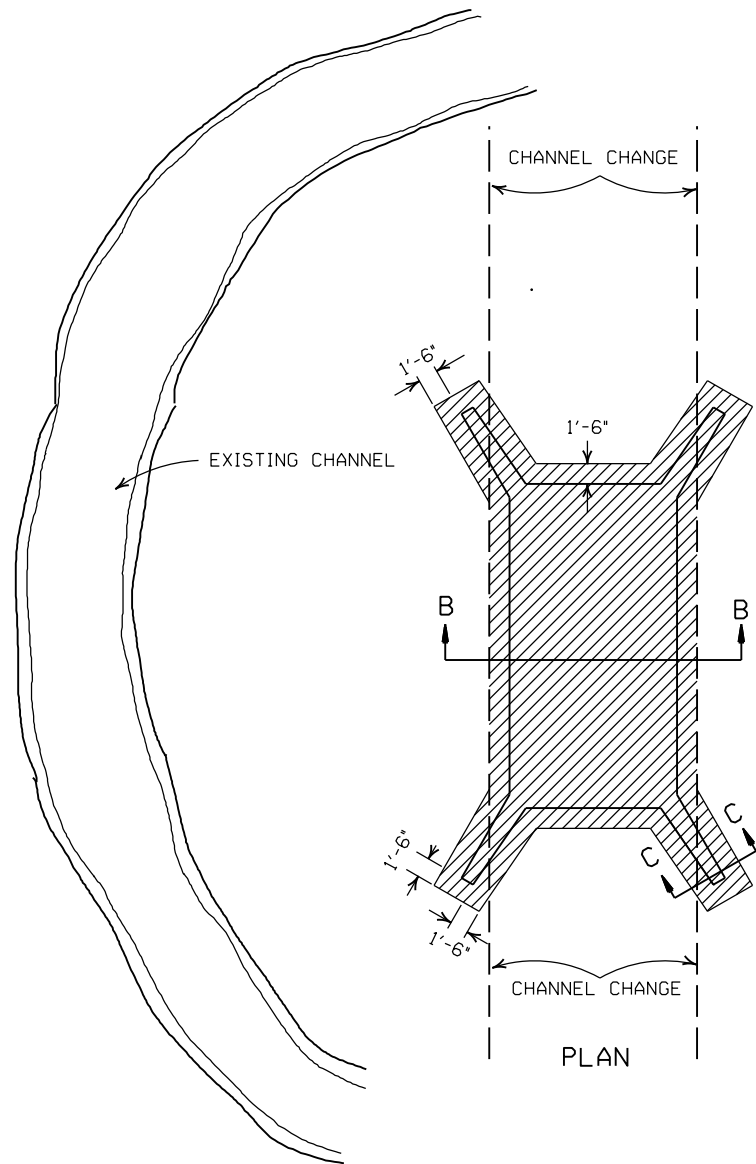


NOTE: LENGTH MEASURED ALONG THE CENTER OF 2' STRIP OF SOLID SODDING.

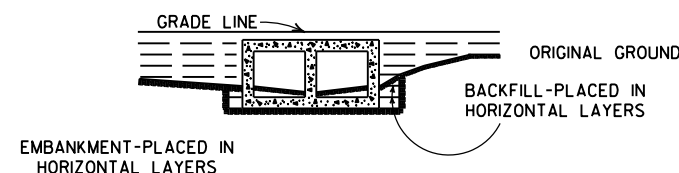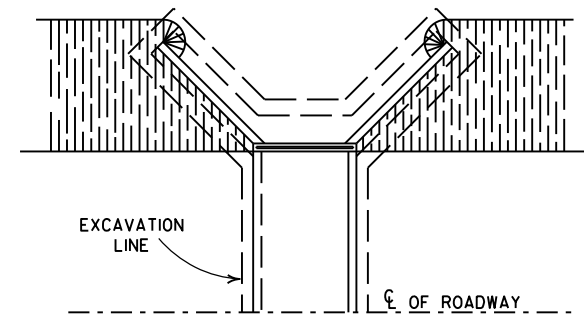


BACKFILL DETAILS FOR BOX CULVERT

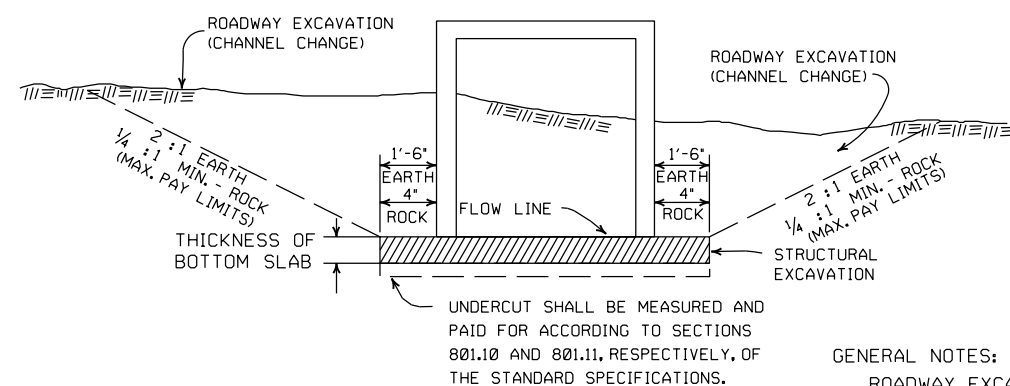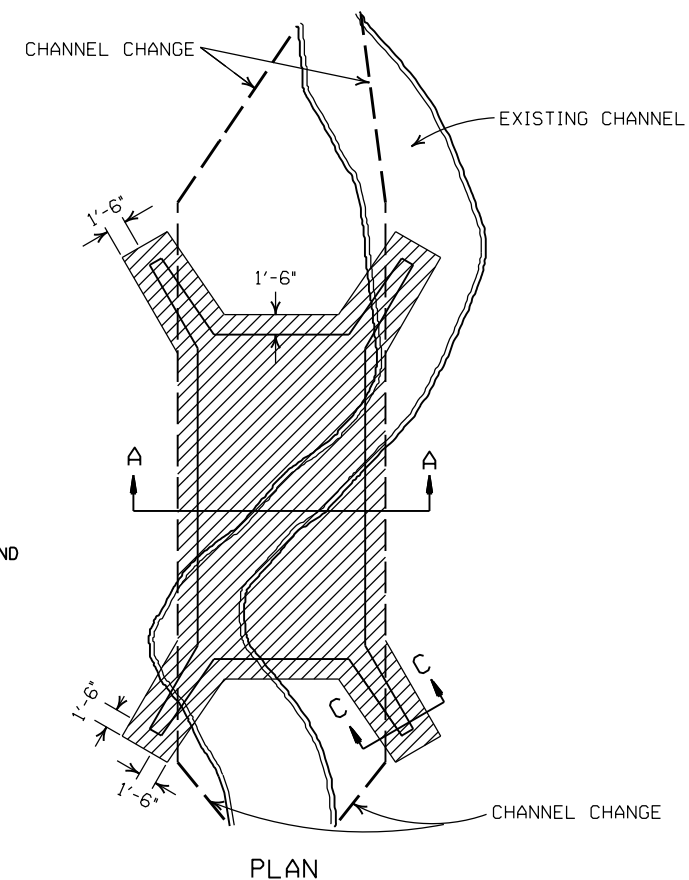

SECTION B-B
DETAILS FOR NEW CHANNELS

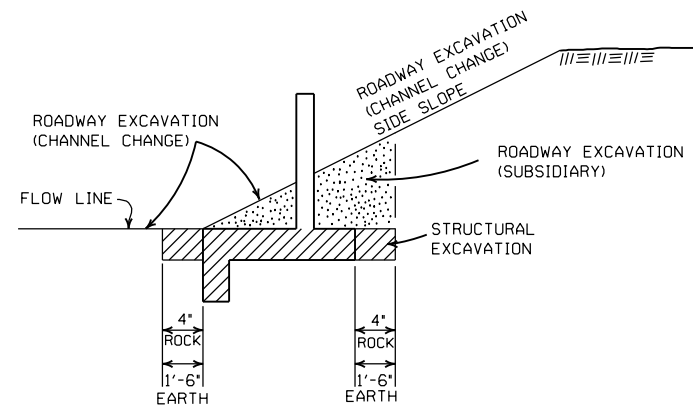

SECTION C-C

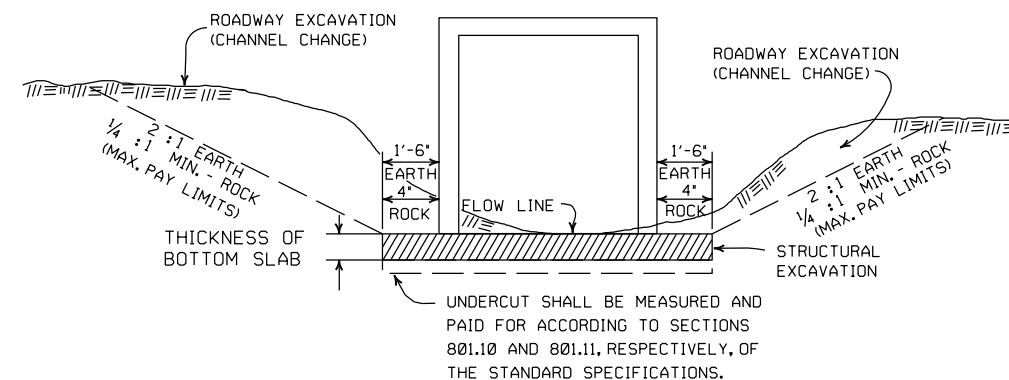

SECTION A-A
DETAILS THROUGH EXISTING CHANNELS

GENERAL NOTES:

ROADWAY EXCAVATION (CHANNEL CHANGE) WILL BE PAID FOR AT R.C. BOX CULVERT LOCATIONS. IT WILL BE PAID TO THE LIMITS ACTUALLY CUT AND WILL BE CONFINED TO THAT PORTION OF THE INDICATED AREA THAT IS ABOVE THE FLOW LINE. ROADWAY EXCAVATION (CHANNEL CHANGE) SHALL BE MEASURED BY CROSS SECTIONS AND VOLUMES COMPUTED BY AVERAGE END AREA METHOD. ALL CHANNEL CHANGES SHALL BE BROUGHT TO GRADE PRIOR TO MAKING ANY EXCAVATION FOR STRUCTURES.

EXCAVATION FOR STRUCTURES WILL BE PAID FOR AT ALL R.C. BOX CULVERT LOCATIONS. IT WILL BE PAID TO THE LIMITS SHOWN AND SHALL BE CONFINED TO THAT PORTION OF THE INDICATED AREA THAT IS BELOW THE CHANNEL FLOW LINE.

ROADWAY EXCAVATION SHOWN IN SECTION C-C ABOVE AS SUBSIDIARY WILL NOT BE MEASURED OR PAID FOR DIRECTLY, BUT PAYMENT WILL BE CONSIDERED TO BE INCLUDED IN THE VARIOUS ITEMS OF EXCAVATION.

DATE	REVISION	FILMED
11-20-03	REVISED SECTION A-A NOTE	
8-22-02	REVISED SECTION B-B NOTE	
10-12-95	COMBINED 1891B AND 1888A	
1-4-83	REVISED GENERAL NOTES AND ADDED MAXIMUM PAY LIMIT NOTES.	674-1-4-83
2-2-76	EXCAV. PAY LIMITS	917-2-2-76
10-2-72	REVISED AND REDRAWN	564-10-16-72

ARKANSAS STATE HIGHWAY COMMISSION

EXCAVATION PAY LIMITS, BACKFILL, & SOLID SODDING FOR BOX CULVERTS

STANDARD DRAWING RCB-2

SUPERELEVATION TABLE FOR TWO - WAY TRAFFIC

DEGREE OF CURVE	30 MPH			35 MPH			40 MPH			45 MPH			50 MPH			55 MPH			60 MPH			65 MPH			70 MPH			75 MPH		
	e	Ls (FT)		e	Ls (FT)		e	Ls (FT)		e	Ls (FT)		e	Ls (FT)		e	Ls (FT)		e	Ls (FT)		e	Ls (FT)		e	Ls (FT)		e	Ls (FT)	
		MINIMUM	DESIRABLE		MINIMUM	DESIRABLE		MINIMUM	DESIRABLE		MINIMUM	DESIRABLE		MINIMUM	DESIRABLE		MINIMUM	DESIRABLE		MINIMUM	DESIRABLE		MINIMUM	DESIRABLE		MINIMUM	DESIRABLE		MINIMUM	DESIRABLE
0° 15'	NC			NC			NC			NC			NC			NC			NC			NC			NC			NC		
0° 30'	NC			NC			NC			NC			NC			NC			RC	96		RC	96		RC	96		RC	96	
0° 45'	NC			NC			NC			NC			RC	96		RC	96		0.024	106		0.026	110		0.030	120		0.030	120	
1° 00'	NC			NC			NC			RC	90		0.022	101		0.026	110		0.030	120		0.034	130		0.038	139		0.038	139	
1° 15'	NC			NC			RC	84		0.022	95		0.028	115		0.032	125		0.038	139		0.042	149		0.046	158		0.046	158	
1° 30'	NC			RC	78		0.022	88		0.028	108		0.032	125		0.038	139		0.044	154		0.050	168		0.056	182		0.056	182	
1° 45'	RC	72		RC	78		0.026	97		0.030	113		0.036	134		0.044	154		0.050	168		0.056	182		0.064	202		0.064	202	
2° 00'	RC	72		0.024	86		0.028	101		0.034	122		0.042	149		0.048	163		0.056	182		0.064	202		0.070	216		0.070	216	
2° 15'	RC	72		0.026	90		0.032	109		0.038	131		0.046	158		0.054	178		0.062	197		0.070	216		0.078	235		0.078	235	
2° 30'	0.022	75		0.028	94		0.034	113		0.042	140		0.050	168		0.058	187		0.068	211		0.076	230		0.086	254		0.086	254	
2° 45'	0.024	79		0.030	98		0.038	122		0.046	149		0.054	178		0.064	202		0.072	221		0.082	245		0.092	269		0.092	269	
3° 00'	0.026	83		0.034	105		0.040	126		0.050	158		0.058	187		0.068	211		0.078	235		0.088	259		0.098	283		0.098	283	
3° 15'	0.028	86		0.036	109		0.044	134		0.052	162		0.062	197		0.072	221		0.082	245		0.092	269		0.100	288		0.100	288	
3° 30'	0.030	90		0.038	113		0.046	139		0.056	171		0.066	206		0.076	230		0.086	254		0.096	278		0.100	288		0.100	288	
3° 45'	0.032	93		0.040	117		0.050	147		0.058	176		0.070	216		0.080	240		0.090	264		0.098	283		0.100	288		0.100	288	
4° 00'	0.034	97		0.042	121		0.052	151		0.062	185		0.072	221		0.084	250		0.094	274		0.100	288		0.100	288		0.100	288	
4° 15'	0.036	100		0.044	125		0.054	155		0.064	189		0.076	230		0.086	254		0.096	278		0.100	288		0.100	288		0.100	288	
4° 30'	0.036	100		0.046	129		0.056	160		0.068	198		0.078	235		0.090	264		0.098	283		0.100	288		0.100	288		0.100	288	
4° 45'	0.038	104		0.048	133		0.060	168		0.070	203		0.082	245		0.092	269		0.098	283		0.100	288		0.100	288		0.100	288	
5° 00'	0.040	108		0.050	137		0.062	172		0.072	207		0.084	250		0.094	274		0.098	283		0.100	288		0.100	288		0.100	288	
5° 30'	0.044	115		0.054	144		0.066	181		0.078	221		0.088	259		0.098	283		0.100	288		0.100	288		0.100	288		0.100	288	
6° 00'	0.046	119		0.058	152		0.070	189		0.082	230		0.092	269		0.098	283		0.100	288		0.100	288		0.100	288		0.100	288	
6° 30'	0.050	126		0.062	160		0.074	198		0.086	239		0.096	278		0.098	283		0.100	288		0.100	288		0.100	288		0.100	288	
7° 00'	0.052	130		0.064	164		0.078	206		0.090	248		0.098	283		0.098	283		0.100	288		0.100	288		0.100	288		0.100	288	
7° 30'	0.054	133		0.068	172		0.080	210		0.092	252		0.098	283		0.098	283		0.100	288		0.100	288		0.100	288		0.100	288	
8° 00'	0.058	140		0.070	176		0.084	219		0.094	257		0.098	283		0.098	283		0.100	288		0.100	288		0.100	288		0.100	288	
8° 30'	0.060	144		0.072	179		0.086	223		0.096	261		0.098	283		0.098	283		0.100	288		0.100	288		0.100	288		0.100	288	
9° 00'	0.062	148		0.076	187		0.088	227		0.096	266		0.098	283		0.098	283		0.100	288		0.100	288		0.100	288		0.100	288	
9° 30'	0.064	151		0.078	191		0.092	235		0.098	270		0.098	283		0.098	283		0.100	288		0.100	288		0.100	288		0.100	288	
10° 00'	0.066	155		0.080	195		0.094	240		0.098	270		0.098	283		0.098	283		0.100	288		0.100	288		0.100	288		0.100	288	
11° 00'	0.070	162		0.084	203		0.096	244		0.098	270		0.098	283		0.098	283		0.100	288		0.100	288		0.100	288		0.100	288	
12° 00'	0.074	169		0.088	211		0.098	248		0.098	270		0.098	283		0.098	283		0.100	288		0.100	288		0.100	288		0.100	288	
13° 00'	0.076	173		0.090	215		0.098	248		0.098	270		0.098	283		0.098	283		0.100	288		0.100	288		0.100	288		0.100	288	
14° 00'	0.080	180		0.094	222		0.098	248		0.098	270		0.098	283		0.098	283		0.100	288		0.100	288		0.100	288		0.100	288	
15° 00'	0.082	184		0.096	226		0.098	248		0.098	270		0.098	283		0.098	283		0.100	288		0.100	288		0.100	288		0.100	288	
16° 00'	0.086	191		0.098	230		0.098	248		0.098	270		0.098	283		0.098	283		0.100	288		0.100	288		0.100	288		0.100	288	
17° 00'	0.088	194		0.100	234		0.100	252		0.100	270		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288	
18° 00'	0.090	198		0.100	234		0.100	252		0.100	270		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288	
19° 00'	0.092	202		0.100	234		0.100	252		0.100	270		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288	
20° 00'	0.094	205		0.100	234		0.100	252		0.100	270		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288	
21° 00'	0.096	209		0.100	234		0.100	252		0.100	270		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288	
22° 00'	0.096	209		0.100	234		0.100	252		0.100	270		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288	
23° 00'	0.098	212		0.100	234		0.100	252		0.100	270		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288	
24° 00'	0.098	212		0.100	234		0.100	252		0.100	270		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288	
25° 00'	0.100	216		0.100	234		0.100	252		0.100	270		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288		0.100	288	

ABBREVIATIONS


NC - NORMAL CROWN
RC - REVERSE CROWN, SUPERELEVATION AT NORMAL CROWN SLOPE
e - RATE OF SUPERELEVATION (FT. PER FT.)
Ls - LENGTH OF SUPERELEVATION TRANSITION (FT.)
L - DISTANCE FROM BEGINNING OF SUPERELEVATION TRANSITION TO ANY POINT (FT.)
d - WIDTH OF PAVEMENT (FT.) OR WIDTH OF SUBGRADE (FT.)
C - NORMAL CROWN (FT.)

- GENERAL NOTES
- ON PAVEMENT WITH TWO-WAY TRAFFIC, THE SUPERELEVATION SHALL BE REVOLVED ON THE INSIDE PAVEMENT EDGE UNLESS OTHERWISE NOTED ON THE PLANS
 - SUPERELEVATION VALUES SHOWN ON THE CROSS SECTIONS ARE VALUES (+) OR (-) TO BE ADDED TO OR SUBTRACTED FROM THE POINT OF CONTROL.
 - LENGTHS FOR L MAY BE ROUNDED IN MULTIPLES OF 25 FT. OR 50 FT. TO PERMIT SIMPLER CALCULATIONS.
 - PAVEMENTS WIDER THAN 2 LANES SHALL HAVE ADDITIONAL TRANSITION LENGTHS AS FOLLOWS:


3 LANE UNDIVIDED - - - - +20%
4 LANE UNDIVIDED - - - - +50%
5 LANE UNDIVIDED - - - - +80%
6 LANE UNDIVIDED - - - - +100%

NOTE: MAINTAIN NORMAL CROWN ON INSIDE UNTIL SUPERELEVATION EXCEEDS 2C.
RATE OF SUPERELEVATION SHALL BE COMPUTED ON STRAIGHT LINE METHOD USING APPLICABLE Ls.
















SUPERELEVATION FORMULA = $\frac{Lde}{Ls}$

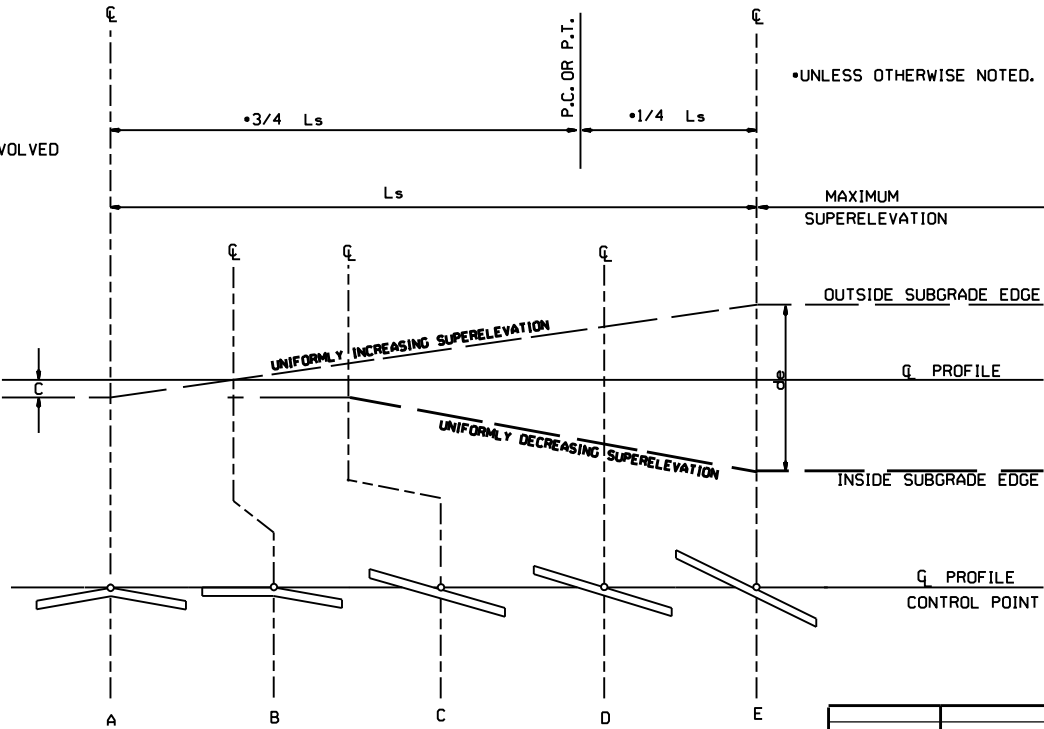

STANDARD METHOD WHEN SUPERELEVATION REVOLVES AROUND CENTER LINE

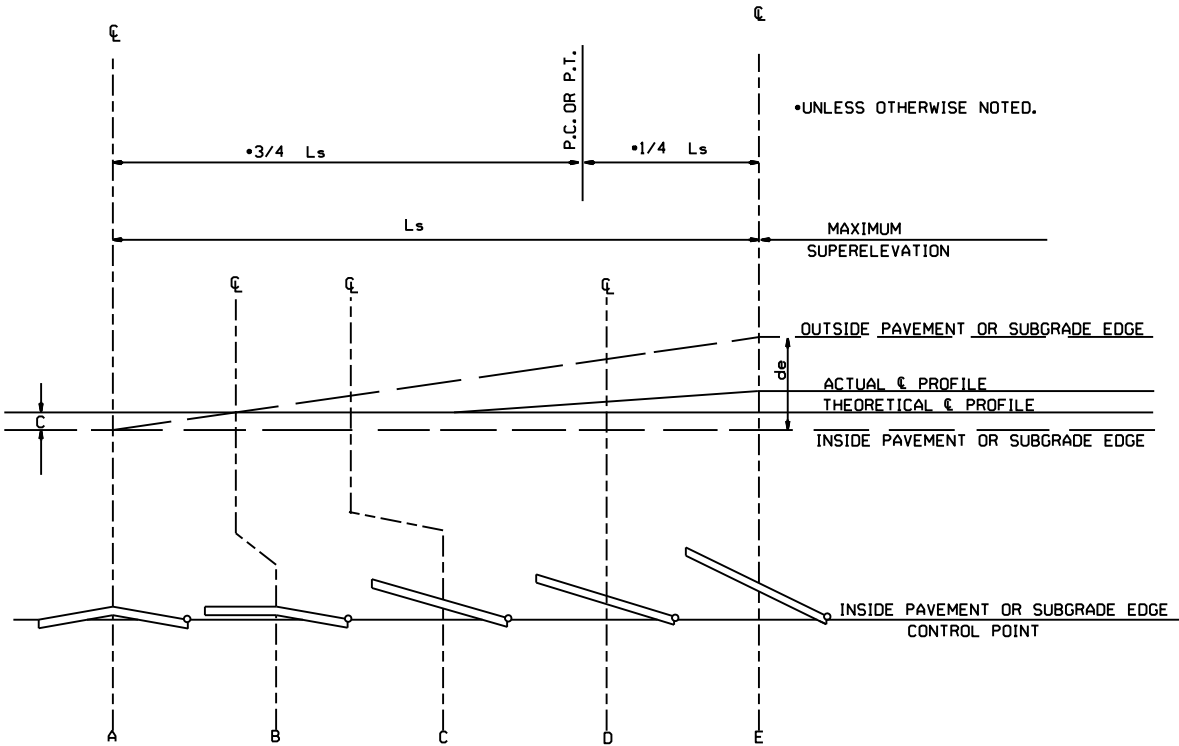


ST


RI-I  STANDARD 30"x30" EXPRESSWAY 36"x36" SPECIAL 48"x48"	RI-2  STD. 36"x36"x36" EXPWY. 48"x48"x48" FWY. 60"x60"x60"	R2-I  STD. 24"x30" EXPWY. 36"x48" FWY. 48"x60"	W3-5  STD. 36"x36" EXPWY. 48"x48" FWY. 48"x48"	W3-5a  STD. 36"x36" EXPWY. 48"x48" FWY. 48"x48"	R4-I  STD. 24"x30" EXPWY. 36"x48" FWY. 48"x60"	R4-2  STD. 24"x30" EXPWY. 36"x48" FWY. 48"x60"	ADVANCE DISTANCES (XXXX) 500 FT 1/2 MILE 1000 FT 3/4 MILE 1500 FT 1 MILE AHEAD GENERAL NOTES: 1. ALL TRAFFIC CONTROL DEVICES USED ON ROAD CONSTRUCTION SHALL CONFORM TO THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, LATEST EDITION, AND TO THE STANDARD HIGHWAY SIGNS, LATEST EDITION, OR AS APPROVED BY THE FEDERAL HIGHWAY ADMINISTRATION. 2. TRAFFIC CONTROL DEVICES SHALL BE SET UP JUST BEFORE THE START OF CONSTRUCTION OPERATIONS AND SHALL BE PROPERLY MAINTAINED DURING THE TIME SUCH CONDITIONS EXIST. THEY SHALL REMAIN IN PLACE ONLY AS LONG AS NEEDED AND REMOVED THEREAFTER. 3. EXISTING SIGNS AND CONSTRUCTION SIGNS SHALL BE KEPT IN PROPER POSITION, AND BE CLEAN AND LEGIBLE AT ALL TIMES. SIGNS THAT DO NOT APPLY TO EXISTING CONDITIONS SHALL BE REMOVED. SIGNS THAT ARE DAMAGED, DEFACED, OR THAT ACCUMULATE DIRT DURING CONSTRUCTION SHALL BE CLEANED, REPAIRED, OR REPLACED. 4. SIGNS ARE USUALLY MOUNTED ON A SINGLE POST, ALTHOUGH THOSE WIDER THAN 36" OR LARGER THAN 10 SQ. FT. SHALL BE MOUNTED ON TWO POSTS OR ABOVE A TYPE III BARRICADE. 5. SIGN POSTS DIRECT BURIED IN SOIL SHALL BE 2 LB. MINIMUM CHANNEL POST OR 4"x4" WOOD POSTS. CHANNEL POSTS SHALL BE PAINTED GREEN. WOOD POSTS SHALL BE PAINTED WHITE. ALL POSTS SHALL BE NEATLY CONSTRUCTED, AND SHALL BE REPLUMBED, CLEANED, OR REPAIRED AS NEEDED FOR THE DURATION OF THE JOB. THERE SHALL NOT BE MORE THAN 2 POSTS IN A 7' PATH FOR WOOD OR CHANNEL POSTS. ANY CHANNEL POST SPLICE SHALL BE IN ACCORDANCE WITH STANDARD DRAWING TC-3. 6. POST MOUNTED SIGNS IN RURAL AREAS SHALL BE CONSTRUCTED WITH THE NEAR EDGE OF THE SIGN FROM 6 TO 12 FEET FROM THE PAVEMENT EDGE. SIGNS IN URBAN AREAS AND BARRICADE MOUNTED SIGNS SHALL BE MOUNTED A MINIMUM OF 2 FEET FROM THE PAVEMENT EDGE. 7. ALL POST AND BARRICADE MOUNTED SIGNS MOUNTED IN URBAN AREAS SHALL BE MOUNTED A MINIMUM DISTANCE OF 7' FROM THE BOTTOM OF THE SIGN TO THE ROADWAY SURFACE. ALL POST AND BARRICADE MOUNTED SIGNS MOUNTED IN RURAL AREAS SHALL BE MOUNTED A MINIMUM DISTANCE OF 7' FROM THE BOTTOM OF THE SIGN TO THE ROADWAY SURFACE, EXCEPT A MINIMUM OF 6' SHALL BE USED WHEN MOUNTING AN ADVISORY SIGN BELOW A WARNING SIGN. TEMPORARY SIGNS MAY BE MOUNTED ON PORTABLE SUPPORTS FOR INTERMEDIATE TERM STATIONARY WORK CONDITIONS. THE SIGNS MINIMUM MOUNTING HEIGHT SHALL BE 5'. RETROREFLECTIVE DEVICES SHALL BE USED. TEMPORARY SIGNS MAY BE MOUNTED ON PORTABLE SUPPORTS FOR SHORT-TERM, SHORT DURATION, AND MOBILE CONDITIONS. THEY SHALL BE NO LESS THAN ONE (1) FOOT ABOVE THE TRAVELED WAY. LONG-TERM STATIONARY SIGNS SHALL BE DIRECT BURIED IN SOIL, UNLESS CONDITIONS NECESSITATE THE USE OF PORTABLE SIGNS, OR AS APPROVED BY THE ENGINEER. CONCRETE PADS, CONCRETE OR ROCK BALLAST, OR OTHER SOLID MATERIALS SHALL NOT BE UTILIZED WITH PORTABLE SIGN SUPPORTS. 8. FLAGGERS SHALL USE REFLECTORIZED STOP-SLOW PADDLES. FLAGS MAY BE USED ONLY FOR EMERGENCY SITUATIONS. 9. MOST OF THE SIGNS SHOWN ARE ORIENTED TO THE RIGHT. HOWEVER, THIS DOES NOT PRECLUDE THE USE OF MIRROR IMAGES OF THESE SIGNS WHERE THE REVERSE ORIENTATION MIGHT BETTER CONVEY TO MOTORISTS THE PROPER DIRECTION OF MOVEMENT. 10. R55-1 SIGNS SHALL BE PLACED AT LEAST 1500' BUT NOT MORE THAN 1 MILE IN ADVANCE OF THE WORK ZONE. IF A SPEED LIMIT REDUCTION IS IN EFFECT, THE SIGN SHALL BE PLACED A MINIMUM OF 500' IN ADVANCE OF THE "REDUCED SPEED AHEAD" SIGN. • NOTE: SUPPORTS FOR SIGNS, BARRICADES, AND VERTICAL PANELS THAT ARE DIFFERENT FROM THE REQUIREMENTS SHOWN IN NOTES 4 & 5, BUT MEET THE REQUIREMENTS OF MANUAL FOR ASSESSING SAFETY HARDWARE (MASH), WILL BE ACCEPTED. COMPLIANCE WITH THE REQUIREMENTS OF MANUAL FOR ASSESSING SAFETY HARDWARE (MASH) IS REQUIRED FOR ALL PROJECTS.
R5-I  STD. 30"x30" EXPWY. 36"x36" SPECIAL 48"x48"	R1I-2  48"x30"	R1I-3A  60"x30"	R1I-4  60"x30"	W2I-5a  STD. 36"x36" FWY. 48"x48"	WI-I  STD. 36"x36" FWY. 48"x48"	WI-2  STD. 36"x36" FWY. 48"x48"	
WI-3  STD. 48"x48"	WI-4  STD. 48"x48"	WI-6  STD. 48"x24" SPECIAL 60"x30"	WI-8  STD. 18"x24" SPECIAL 24"x30" EXPWY. 30"x36" FWY. 36"x48"	W3-I  STD. 36"x36" SPECIAL 48"x48"	W3-2  STD. 36"x36" SPECIAL 48"x48"	W4-2  STD. 36"x36" FWY. 48"x48"	
W5-I  STD. 36"x36" SPECIAL 48"x48"	W6-3  EXPWY. 36"x36" SPECIAL 48"x48"	W8-7  EXPWY. 36"x36" FWY. 48"x48"	W9-2  STD. 36"x36" FWY. 48"x48"	W13-I  STD. 24"x24"	W20-I  STD. 48"x48"	W20-2  STD. 48"x48"	W20-3  STD. 48"x48"
W20-4  STD. 48"x48"	W20-5  STD. 48"x48"	W20-7a  18" 500 FEET 24" W16-2 STD. 36"x36" FWY. 48"x48"	W2I-2  STD. 30"x30" SPECIAL 36"x36"	W2I-5  STD. 30"x30" SPECIAL 36"x36"	W24-I  STD. 36"x36"	WI-4b  STD. 48"x48"	R56-I  STD. 18"x18"
W8-II  STD. 36"x36" FWY. 48"x48"	W8-9  STD. 36"x36" FWY. 48"x48"	G20-I  60"x24"	G20-2  48"x24"	OM-3L OM-3R  12"x36"	M4-9  STD. 30"x24" SPECIAL 48"x36" SPECIAL 60"x48"	M4-10  48"x18"	R55-I  36"x60" • USE 6" C LETTERS •• USE 4" D LETTERS

II-07-19	REVISED FOR MASH	
4-13-17	DELETED RSP-1 & ADDED W2I-5a	
9-2-15	REVISED REDUCED SPEED LIMIT AHEAD SIGNS REVISED ROAD WORK NEXT XX MILES	
12-15-11	REVISED W24-1	
11-17-10	DELETED W8-9a & ADDED W8-9	
10-15-09	ADDED REFERENCE TO MASH & ADDED SIGN W24-1	
4-17-08	REVISED SIGN DESIGNATIONS	
11-18-04	REVISED NOTES	
10-9-03	REVISED NOTE 1	
11-16-01	REVISED NOTE 7	
9-28-00	REVISED NOTE	
11-18-98	ADDED NOTE	
6-26-97	REVISED NOTE 5	
4-03-97	REVISED NOTE 5	
10-18-96	ADDED CONTROLLED ACCESS HWY. SIGN & TO NOTE 7	
10-12-95	ADDED R55-1	
6-8-95	REVISED TO CORRECT SIGN ILLUSTRATIONS	6-8-95
2-2-95	REVISED PER PART VI, MUTCD SEPT. 3, 1993	
8-15-91	DRAWN AND PLACED IN USE	
DATE	REVISION	FILMED


ARKANSAS STATE HIGHWAY COMMISSION
STANDARD TRAFFIC CONTROLS
FOR HIGHWAY CONSTRUCTION
STANDARD DRAWING TC-1

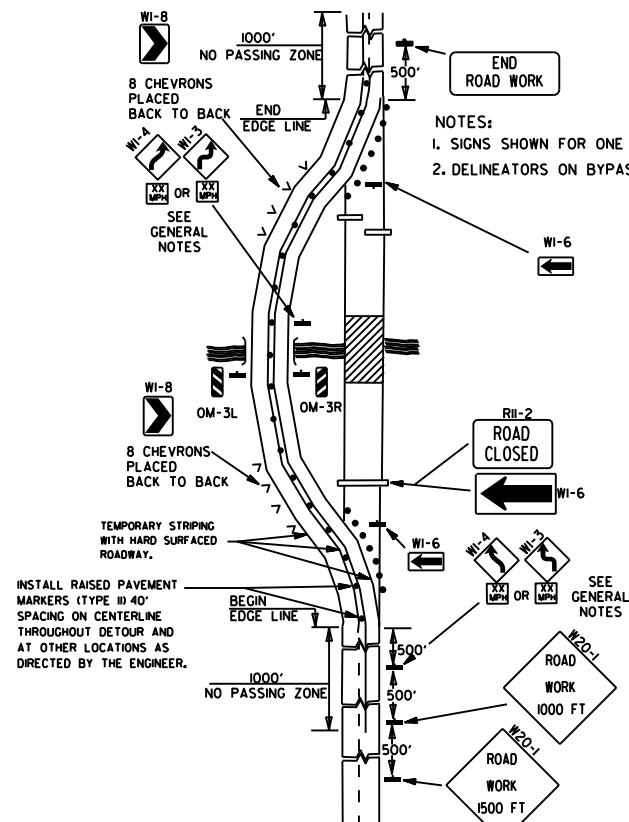


(A) TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES ON A 2-LANE HIGHWAY WHERE THE ENTIRE ROADWAY IS CLOSED AND A BYPASS DETOUR IS PROVIDED.

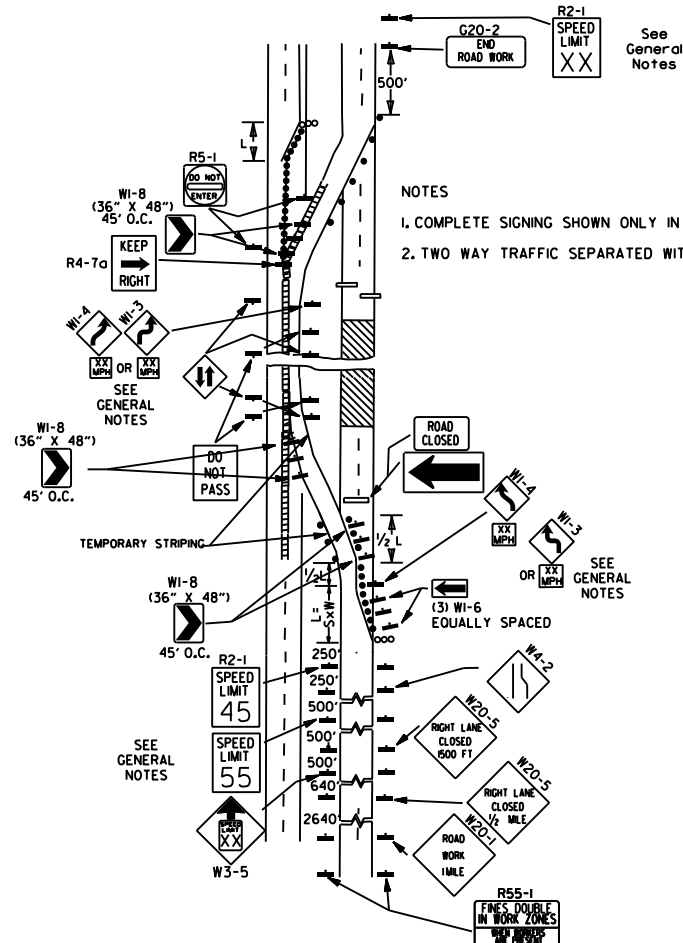


(B) TYPICAL APPLICATION - 4-LANE DIVIDED ROADWAY WHERE ONE ROADWAY IS CLOSED.

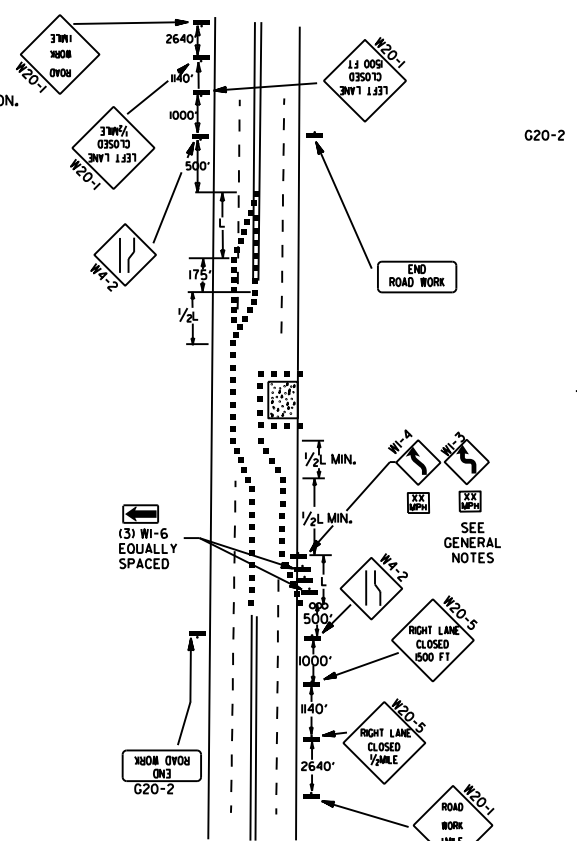


(C) TYPICAL APPLICATION - 4-LANE UNDIVIDED ROADWAY WHERE HALF OF THE ROADWAY IS CLOSED.

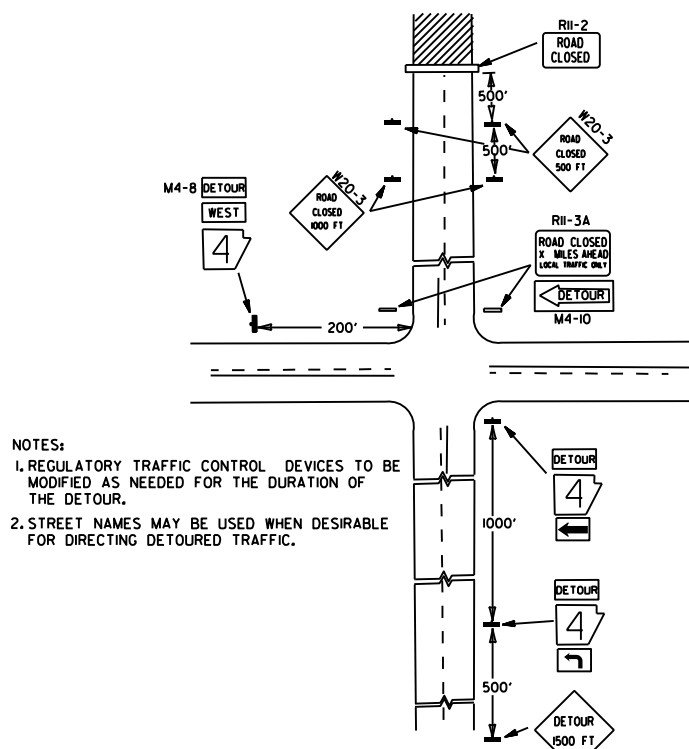


(D) TYPICAL APPLICATION - ROADWAY CLOSED BEYOND DETOUR POINT.

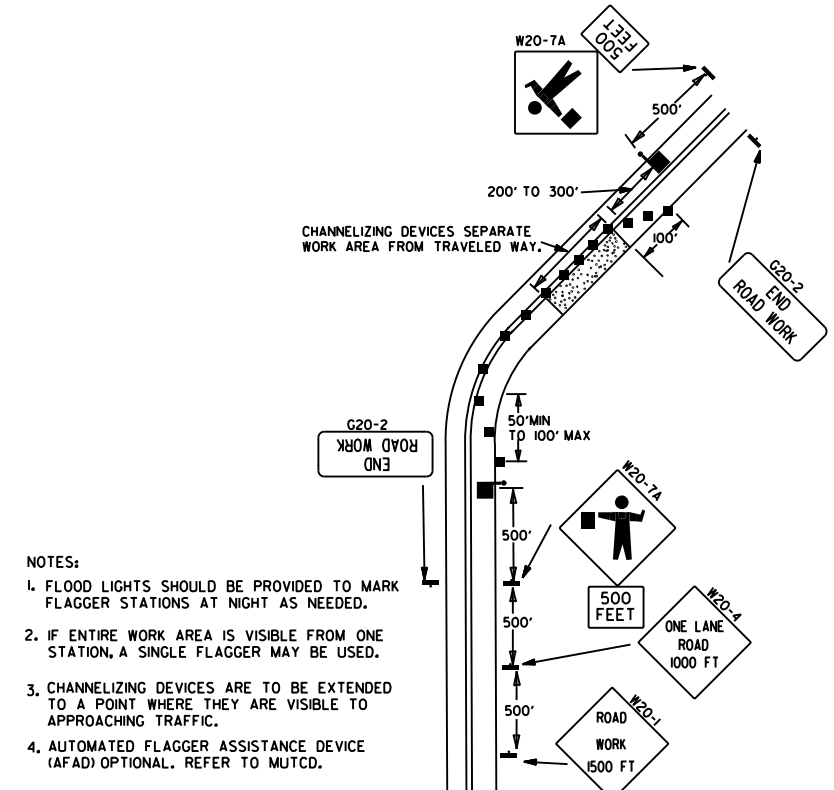

(E) TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES ON 2-LANE HIGHWAY WHERE ONE LANE IS CLOSED AND FLAGGING IS PROVIDED.

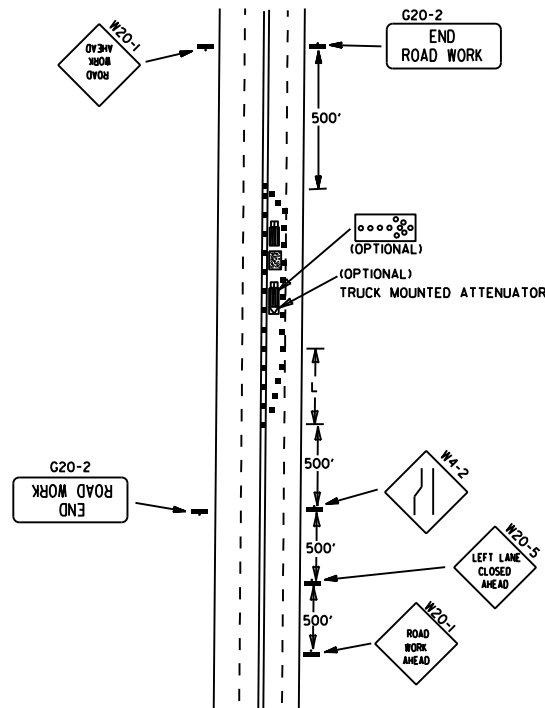

(F) TYPICAL APPLICATION - 4-LANE UNDIVIDED ROADWAY WITH INSIDE LANE CLOSED.

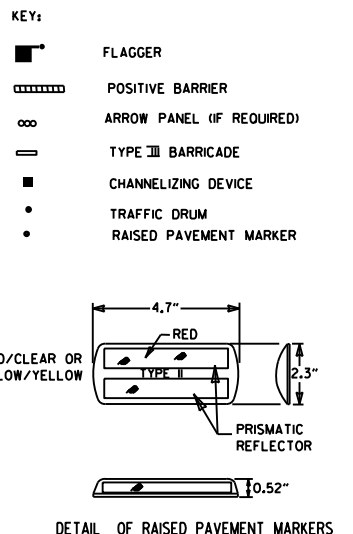

TYPICAL ADVANCE WARNING SIGN PLACEMENT
TAPER FORMULAE:
 $L = SXW$ FOR SPEEDS OF 45MPH OR MORE.
 $L = \frac{WS^2}{60}$ FOR SPEEDS OF 40MPH OR LESS.
WHERE:
L = MINIMUM LENGTH OF TAPER.
S = NUMERICAL VALUE OF POSTED SPEED LIMIT PRIOR TO WORK OR 85TH PERCENTILE SPEED.
W = WIDTH OF OFFSET.

- GENERAL NOTES:
- THE MAINTENANCE DIVISION SHALL CONDUCT A BALL BANK STUDY TO DETERMINE THE ADVISORY SPEED LIMIT PRIOR TO OPENING TO TRAFFIC. THE ADVISORY SPEED WILL BE POSTED ON W1-3 OR W1-4 CURVE WARNING SIGNS. USE W1-4 WHEN SPEED IS GREATER THAN 30MPH AND W1-3 WHEN 30MPH OR LESS.
 - WHEN THE EXISTING SPEED LIMIT IS 55MPH AND THE PLANS REQUIRE A SPEED LIMIT OF 45MPH, THE R2-1(55) SHALL BE OMITTED AND THE W3-5 SHALL BE INSTALLED AT THAT LOCATION. ADDITIONAL R2-1(45)MPH SPEED LIMIT SIGNS SHALL BE INSTALLED AT A MAXIMUM OF 1 MILE INTERVALS. AT THE END OF THE WORK AREA A R2-1(XX) SHALL BE INSTALLED TO MATCH ORIGINAL SPEED LIMIT.
 - WHEN THE EXISTING SPEED LIMIT IS 65MPH AND THE PLANS REQUIRE A SPEED LIMIT OF 55MPH, THE R2-1(65) SHALL BE OMITTED. ADDITIONAL R2-1(55)MPH SPEED LIMIT SIGNS SHALL BE INSTALLED AT A MAXIMUM OF 1 MILE INTERVALS. AT THE END OF THE WORK AREA A R2-1(XX) SHALL BE INSTALLED TO MATCH ORIGINAL SPEED LIMIT.
 - THE MAXIMUM SPACING BETWEEN CHANNELIZING DEVICES IN A TAPER SHOULD BE APPROXIMATELY EQUAL IN FEET TO THE SPEED LIMIT. BEYOND THE TAPER, MAXIMUM SPACING SHALL BE TWO TIMES THE SPEED LIMIT, OR AS DIRECTED BY THE ENGINEER.
 - WARNING LIGHTS AND/OR FLAGS MAY BE MOUNTED TO SIGNS OR CHANNELIZING DEVICES AT NIGHT AS NEEDED.
 - PAVEMENT MARKINGS NO LONGER APPLICABLE WHICH MIGHT CREATE CONFUSION IN THE MINDS OF VEHICLE OPERATORS SHALL BE REMOVED OR OBLITERATED AS SOON AS PRACTICABLE.
 - TRAILER MOUNTED DEVICES SUCH AS ARROW PANELS AND PORTABLE CHANGEABLE MESSAGE SIGNS SHALL BE DELINEATED BY AFFIXING CONSPICUITY MATERIAL IN A CONTINUOUS LINE ON THE FACE OF THE TRAILER. WHEN PLACED ON OR ADJACENT TO THE SHOULDER AND NOT BEHIND A POSITIVE BARRIER, THESE DEVICES SHALL BE DELINEATED BY PLACING FIVE (5) TRAFFIC DRUMS, EQUALLY SPACED ALONG THE TRAFFIC SIDE OF THE DEVICE. PAYMENT FOR TRAFFIC DRUMS SHALL BE CONSIDERED INCLUDED IN THE PRICE BID FOR VARIOUS TRAILER MOUNTED DEVICES.
 - DIMENSIONS SHOWN FOR RAISED PAVEMENT MARKERS ARE TYPICAL. THE CONTRACTOR MAY SUBSTITUTE SIMILAR MARKERS WITH THE APPROVAL OF THE ENGINEER. REQUESTING APPROVAL FOR SIMILAR MARKERS MAY BE MADE BY REFERRING TO THE ARDOT QUALIFIED PRODUCTS LIST.
 - ALL TRAILER MOUNTED DEVICES SUCH AS ARROW PANELS AND PORTABLE CHANGEABLE MESSAGE SIGNS SHALL MEET THE REQUIREMENTS OF THE MANUAL FOR ASSESSING SAFETY HARDWARE (MASH).

05-20-21	REVISED NOTE 7	
11-07-19	REVISED NOTE 1, ADDED NOTE 9	
9-2-15	REVISED NOTE 2, ADDED NOTE 8, REVISED DRAWING (A) & REPLACED R2-5A WITH W3-5	
9-12-13	REVISED DETAIL OF RAISED PAVEMENT MARKERS	
3-11-10	ADDED (AFAD)	
11-20-08	REVISED SIGN DESIGNATIONS	
11-18-04	ADDED GENERAL NOTE	
10-18-96	ADDED R55-1	
4-26-96	CORRECTED (a) BEHIND G20-2	
6-8-95	CORRECTED SIGN IDENT. ON W1-4A	6-8-95
2-2-95	REVISED PER PART VI, MUTCD, SEPT. 3, 1993	
8-15-91	DRAWN AND PLACED IN USE	
DATE	REVISION	FILMED

(A) TYPICAL APPLICATION - DAYTIME MAINTENANCE OPERATIONS OF SHORT DURATION ON A 4-LANE DIVIDED ROADWAY WHERE HALF OF THE ROADWAY IS CLOSED.

(C) TYPICAL APPLICATION - CONSTRUCTION OPERATIONS OF INTERMEDIATE TO LONG TERM DURATION ON A 4-LANE DIVIDED ROADWAY WHERE HALF OF THE ROADWAY IS CLOSED.





(B) TYPICAL APPLICATION - 3-LANE ONEWAY ROADWAY WHERE CENTER LANE IS CLOSED.

CHANNELIZING DEVICES





• WHEN CONES ARE USED ON FREEWAYS AND MULTI-LANE HIGHWAYS, THEY SHALL BE 28" MIN. DURING HOURS OF DARKNESS, 28" CONES SHALL BE USED ON ALL ROADWAYS, AND SHALL BE REFLECTORIZED IN ACCORDANCE WITH THE M.U.T.C.D.

CONES



VERTICAL PANEL PLACEMENT

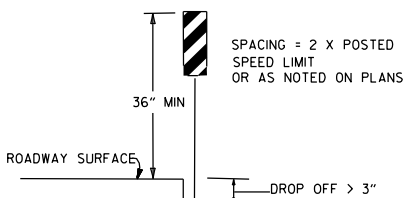

FLAG SHALL BE OF GOOD GRADE RED MATERIAL

KEY:

- ○ ○ ○ ARROW PANEL (IF REQUIRED)
- CHANNELIZING DEVICE
- TRAFFIC DRUM

GENERAL NOTES:

- A SPEED LIMIT REDUCTION MAY BE IMPLEMENTED ONLY WHEN DESIGNATED IN THE PLAN OR WHEN RECOMMENDED BY THE ROADWAY DESIGN DIVISION.
- WHEN THE EXISTING SPEED LIMIT IS 55MPH AND THE PLANS REQUIRE A SPEED LIMIT OF 45MPH, THE R2-(55) SHALL BE OMITTED AND THE W3-5 SHALL BE INSTALLED AT THAT LOCATION. ADDITIONAL R2-1 45MPH SPEED LIMIT SIGNS SHALL BE INSTALLED AT A MAXIMUM OF 1/2 MILE INTERVALS. AT THE END OF THE WORK AREA A R2-(XX) SHALL BE INSTALLED TO MATCH ORIGINAL SPEED LIMIT.
- WHEN THE EXISTING SPEED LIMIT IS 65MPH AND THE PLANS REQUIRE A SPEED LIMIT OF 55MPH, THE R2-(65) SHALL BE OMITTED. ADDITIONAL R2-1 55MPH SPEED LIMIT SIGNS SHALL BE INSTALLED AT A MAXIMUM OF 1/2 MILE INTERVALS. AT THE END OF THE WORK AREA A R2-(XX) SHALL BE INSTALLED TO MATCH ORIGINAL SPEED LIMIT.
- THE MAXIMUM SPACING BETWEEN CHANNELIZING DEVICES IN A TAPER SHOULD BE APPROXIMATELY EQUAL IN FEET TO THE SPEED LIMIT. BEYOND THE TAPER, MAXIMUM SPACING SHALL BE TWO TIMES THE SPEED LIMIT OR AS DIRECTED BY THE ENGINEER.
- WARNING LIGHTS AND/OR FLAGS MAY BE MOUNTED TO SIGNS OR CHANNELIZING DEVICES AT NIGHT AS NEEDED.
- PAVEMENT MARKINGS NO LONGER APPLICABLE WHICH MIGHT CREATE CONFUSION IN THE MINDS OF VEHICLE OPERATORS SHALL BE REMOVED OR OBLITERATED AS SOON AS PRACTICABLE.
- THE G20-1 SIGN WILL BE REQUIRED ON JOBS OF OVER TWO MILES IN LENGTH. WHEN THE LANE CLOSURE IS NOT AT THE BEGINNING OF THE PROJECT, THE G20-1 SIGN SHALL BE ERECTED 125' IN ADVANCE OF THE JOB LIMIT. ADDITIONAL W20-1 (1/2 MILE) SIGNS ARE NOT REQUIRED IN ADVANCE OF LANE CLOSURES THAT BEGIN INSIDE THE PROJECT LIMITS.
- FLAGGERS SHALL USE STOP/SLOW PADDLES FOR CONTROLLING TRAFFIC THROUGH WORK ZONES. FLAGS MAY BE USED ONLY FOR EMERGENCY SITUATIONS.
- ALL PLASTIC DRUMS AND CONES SHALL MEET THE REQUIREMENTS OF MANUAL FOR ASSESSING SAFETY HARDWARE (MASH).
- TRAILER MOUNTED DEVICES SUCH AS ARROW PANELS AND PORTABLE CHANGEABLE MESSAGE SIGNS SHALL BE DELINEATED BY AFFIXING CONSPICUITY MATERIAL IN A CONTINUOUS LINE ON THE FACE OF THE TRAILER. WHEN PLACED ON OR ADJACENT TO THE SHOULDER AND NOT BEHIND A POSITIVE BARRIER, THESE DEVICES SHALL BE DELINEATED BY PLACING FIVE (5) TRAFFIC DRUMS, EQUALLY SPACED ALONG THE TRAFFIC SIDE OF THE DEVICE. PAYMENT FOR TRAFFIC DRUMS SHALL BE CONSIDERED INCLUDED IN THE PRICE BID FOR VARIOUS TRAILER MOUNTED DEVICES.
- ALL TRAILER MOUNTED DEVICES SUCH AS ARROW PANELS AND PORTABLE CHANGEABLE MESSAGE SIGNS SHALL MEET THE REQUIREMENTS OF THE MANUAL FOR ASSESSING SAFETY HARDWARE (MASH).


(D) TYPICAL APPLICATION - CLOSING MULTIPLE LANES OF A MULTILANE HIGHWAY.

TRAFFIC CONTROL DEVICES

VERTICAL DIFFERENTIAL	LOCATION	TRAFFIC CONTROL	
		≤ 45 MPH	> 45 MPH
≤ 1"	CENTERLINE	W8-11	W8-11
> 1"	CENTERLINE	W8-11 AND CENTERLINE LANE STRIPING	W8-11 AND CENTERLINE LANE STRIPING
≤ 3"	CENTERLINE	STANDARD LANE CLOSURE ⁽⁶⁾	STANDARD LANE CLOSURE ⁽⁶⁾
> 3"	CENTERLINE	STANDARD LANE CLOSURE ⁽⁶⁾	STANDARD LANE CLOSURE ⁽⁶⁾
≤ 3"	EDGE OF TRAVELED LANE OR EDGE OF SHOULDER	W8-9 AND TRAFFIC DRUMS ⁽¹⁾	W8-9 AND TRAFFIC DRUMS ⁽¹⁾
> 3"	EDGE OF TRAVELED LANE OR EDGE OF SHOULDER	W8-17, EDGE LINE STRIPING, AND TRAFFIC DRUMS ⁽¹⁾	W8-17, EDGE LINE STRIPING, AND TRAFFIC DRUMS ⁽¹⁾
> 6"	EDGE OF TRAVELED LANE OR EDGE OF SHOULDER	W8-17, EDGE LINE STRIPING, AND TRAFFIC DRUMS ⁽¹⁾	W8-17, EDGE LINE STRIPING, AND TRAFFIC DRUMS ⁽²⁾
> 18"	EDGE OF TRAVELED LANE OR EDGE OF SHOULDER	W8-17, EDGE LINE STRIPING, AND TRAFFIC DRUMS ⁽¹⁾	A STABILIZED WEDGE, W8-17, EDGE LINE STRIPING AND TRAFFIC DRUMS ⁽³⁾
> 24"	EDGE OF TRAVELED LANE OR EDGE OF SHOULDER	PRECAST CONCRETE BARRIER ⁽⁴⁾ & EDGE LINES	PRECAST CONCRETE BARRIER ⁽⁴⁾ & EDGE LINES

INTERSTATE		
VERTICAL DIFFERENTIAL	LOCATION	TRAFFIC CONTROL
≤ 3"	CENTERLINE	W8-11 AND LANE STRIPING
≤ 3"	EDGE OF TRAVELED LANE OR EDGE OF SHOULDER	W8-9, EDGE LINE STRIPING, AND TRAFFIC DRUMS ⁽²⁾
> 3"	EDGE OF TRAVELED LANE OR EDGE OF SHOULDER	W8-17, EDGE LINE STRIPING, AND TRAFFIC DRUMS ⁽²⁾
> 6"	EDGE OF TRAVELED LANE OR EDGE OF SHOULDER	PRECAST CONCRETE BARRIER & EDGE LINES

INTERSTATE AND NON-INTERSTATE		
FORESLOPE	HEIGHT	TRAFFIC CONTROL
1:1	> 2 FT	PRECAST CONCRETE BARRIER
2:1	≤ 5 FT	TRAFFIC DRUMS
2:1	> 5 FT	PRECAST CONCRETE BARRIER
Flatter than 2:1	N/A	TRAFFIC DRUMS

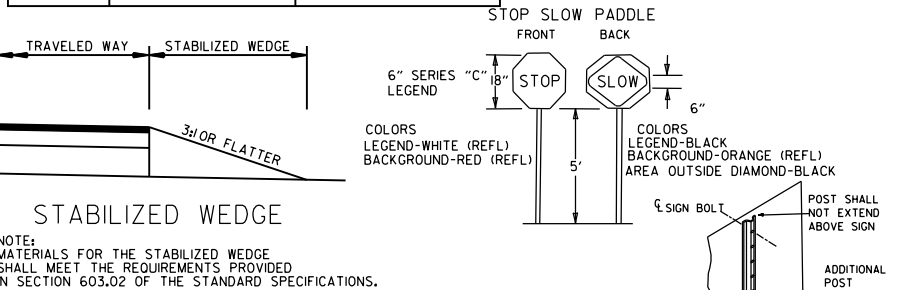


NOTE: MATERIALS FOR THE STABILIZED WEDGE SHALL MEET THE REQUIREMENTS PROVIDED IN SECTION 603.02 OF THE STANDARD SPECIFICATIONS.

NOTES: USE SPLICES ONLY WHEN NECESSARY FOR INSTALLATION. TYPICAL INSTALLATION SHOULD HAVE NO SPLICES (SEE STD. DRAWING NO. SHS-2)

NORMAL INSTALLATIONS WILL REQUIRE 1/4" DIA. BOLTS TO MOUNT SIGNS TO POST AND 5/16" DIA. BOLTS TO ASSEMBLE THE VARIOUS POST SUPPORTS. EACH OF THESE BOLTS SHALL BE CARRIAGE BOLTS.

SIGN POSTS SHALL BE PAINTED GREEN; SIGNS SHALL NOT BE PAINTED, AND ALL SIGN POSTS SHALL BE PLUMB.

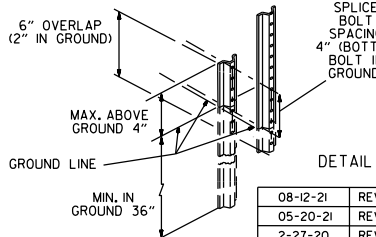


DETAIL OF SPLICES

DATE	REVISION	FILED
08-12-21	REVISED TRAFFIC CONTROL DEVICES AND NOTES	
05-20-21	REVISED NOTE 10	
2-27-20	REVISED TRAFFIC CONTROL DEVICES DETAILS	
11-07-19	REVISED NOTE 9, ADDED NOTE 11	
7-25-19	REVISED TRAFFIC CONTROL DEVICES DETAILS	
9-2-15	REVISED NOTE 2 & REPLACED R2-5A WITH W3-5	
10-15-09	ADDED REFERENCE TO MASH	
11-20-08	REVISED SIGN DESIGNATIONS	
11-18-04	ADDED NOTE	
10-1-98	ADDED NOTE	
4-03-97	ADDED (SP) TO W6-18 & REVISED TRAFFIC CONTROL DEVICES NOTE	
10-18-96	ADDED R55-1	
10-12-95	MOVED UPPER SPLICE	
6-8-95	REVISED SPLICE DETAIL, TEXT	6-8-95
2-2-95	REVISED PER PART VI, MUTCD, SEPT. 3, 1993	
8-15-91	DRAWN AND PLACED IN USE	

ARKANSAS STATE HIGHWAY COMMISSION
STANDARD TRAFFIC CONTROLS
FOR HIGHWAY CONSTRUCTION

STANDARD DRAWING TC-3


- (A) 4 feet or greater preferred. If less than 4 feet, Precast Units shall be connected to slab (SEE BARRIER STABILIZATION DETAIL-BRIDGE DECKS STD. DRWG. TC-4)

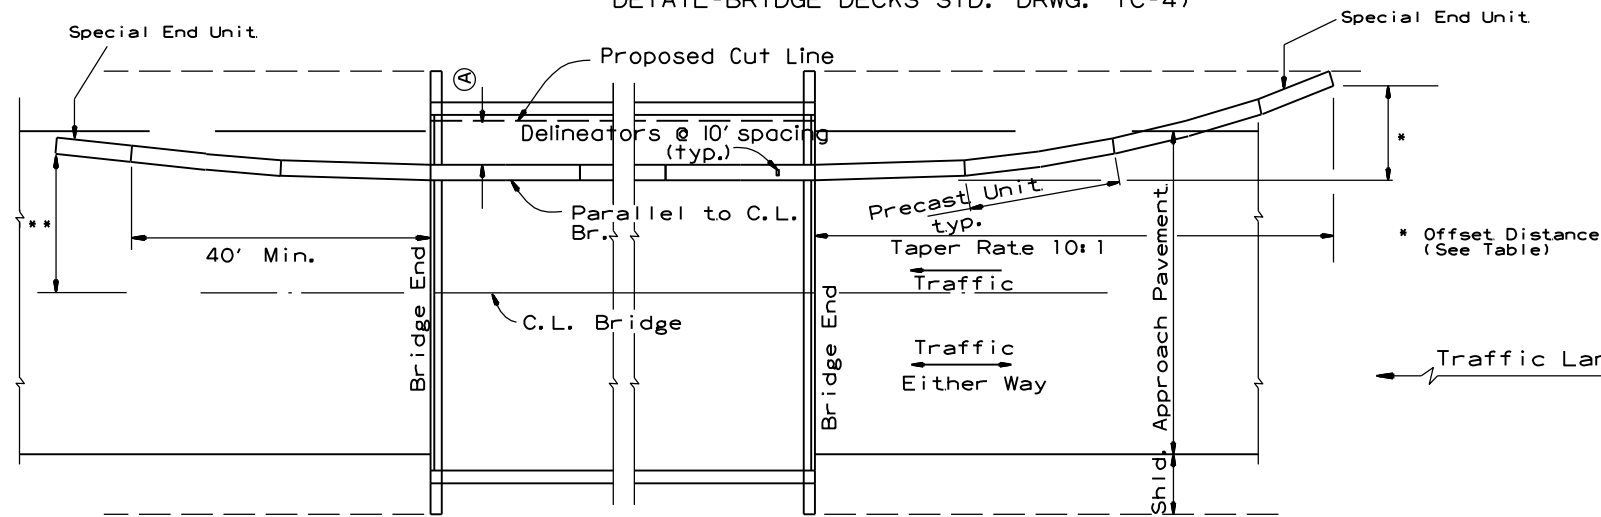

BARRIER PLACEMENT ALONG BRIDGE WITH OFFSET

No Scale

** Offset Distance for Two Way Traffic Only

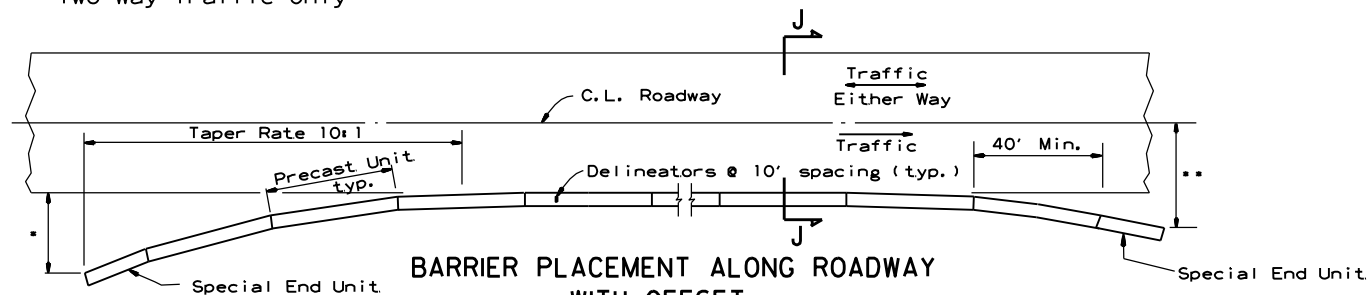

BARRIER PLACEMENT ALONG ROADWAY WITH OFFSET

No Scale


* Offset Distance (See Table)

** Offset Distance For Two Way Traffic Only

Offset Distance Table

Speed (MPH)	Offset Distance (FT.)
≤ 45	12
> 45	18

If offset distance is not attainable, then see "Barrier Placement With Attenuator" Detail shown below.

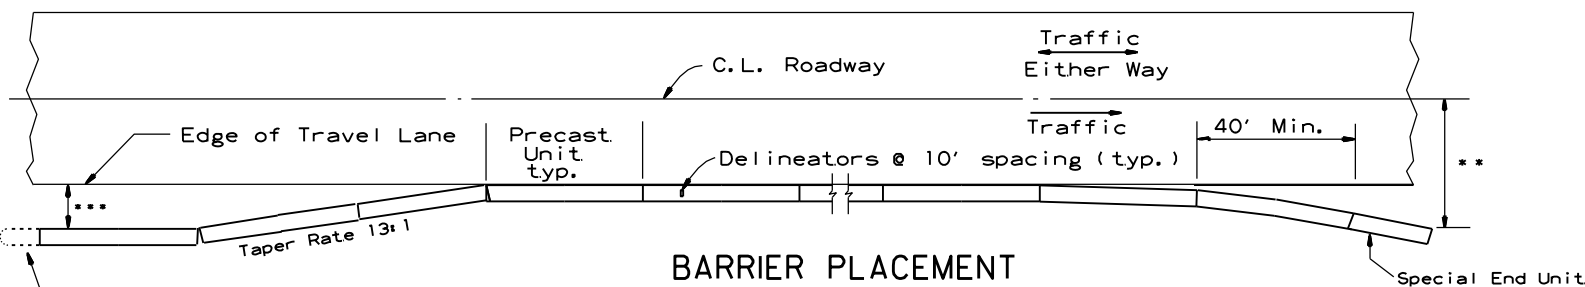


BARRIER PLACEMENT WITH ATTENUATOR

No Scale


** Offset Distance For Two Way Traffic Only

***Min. 3'-0" From Edge of Travel Lane to Nearest Edge of Attenuator

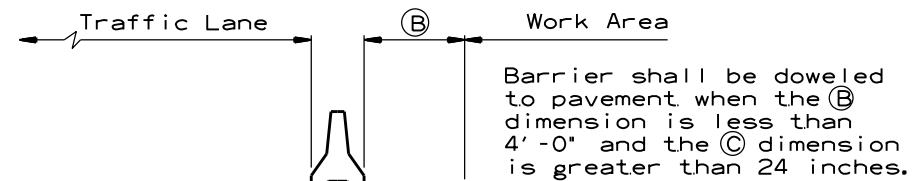

SECTION J-J

No Scale

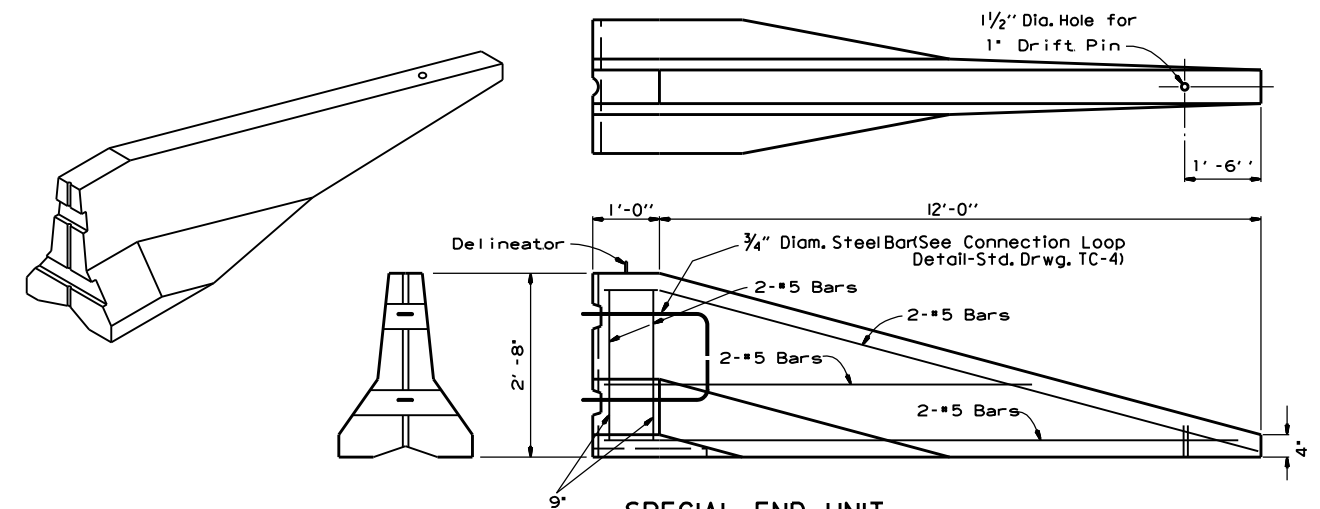










SPECIAL END UNIT

No Scale

General Notes

When shown on the Plans, the ends of the Temporary Precast Concrete Barrier shall be protected with a Manual For Assessing Safety Hardware (MASH) approved Crash Cushion. Payment for Crash Cushions shall be made under the item of "Temporary Impact Attenuation Barrier."

ARIZONA STATE HIGHWAY COMMISSION		
STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION - TEMPORARY PRECAST BARRIER		
DATE	REVISION	FILMED
11-07-19	REVISED NOTE	
10-15-09	ADDED REFERENCE TO MASH	
5-25-06	REVISED BARRIER PLACEMENT	
8-22-02	ISSUED NEW DRAWING	
STANDARD DRAWING TC-5		

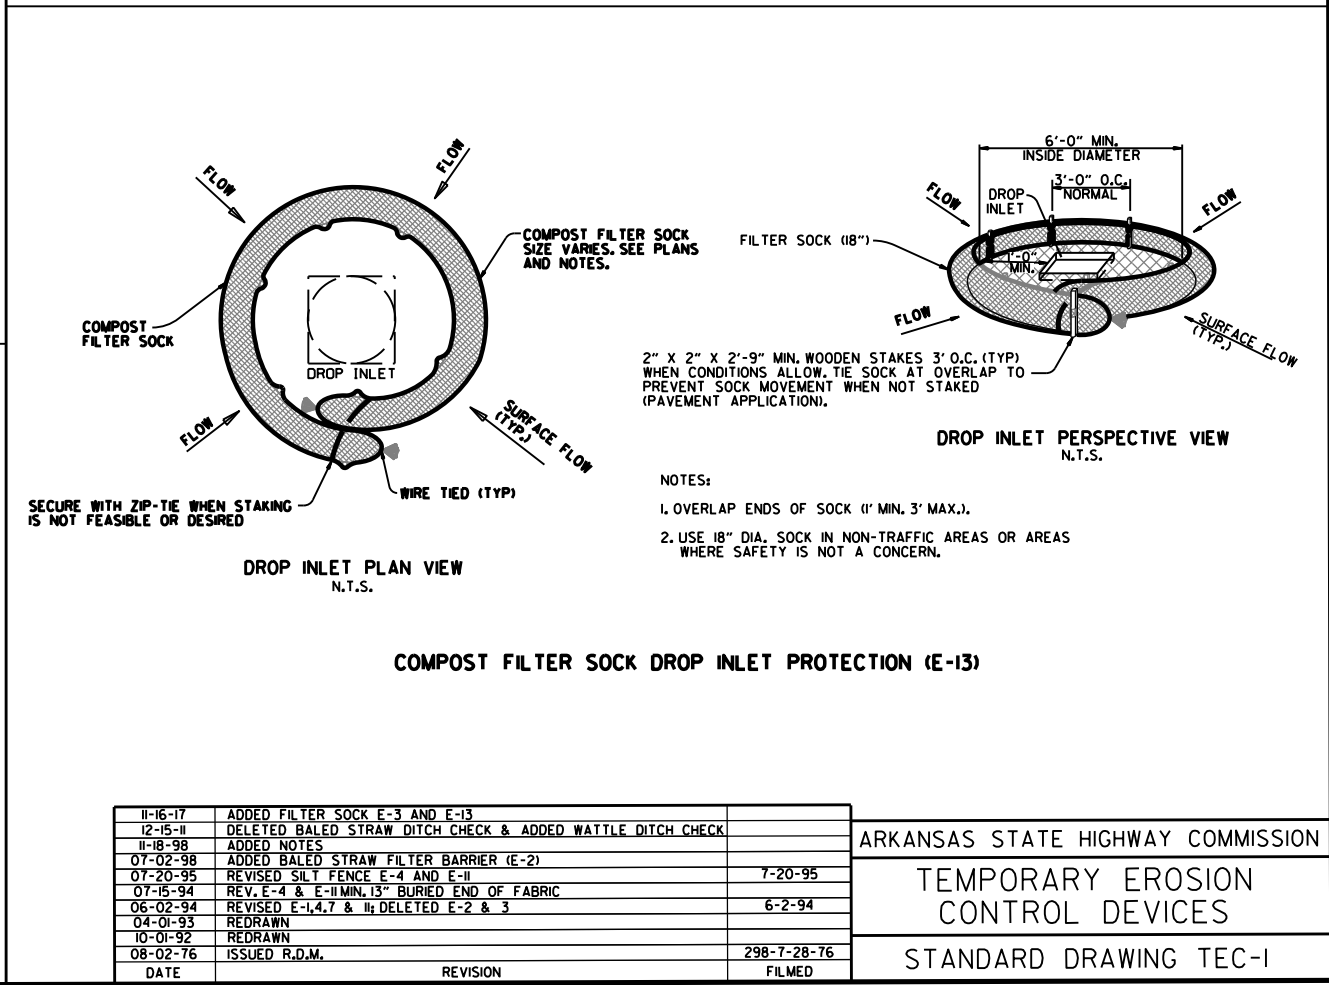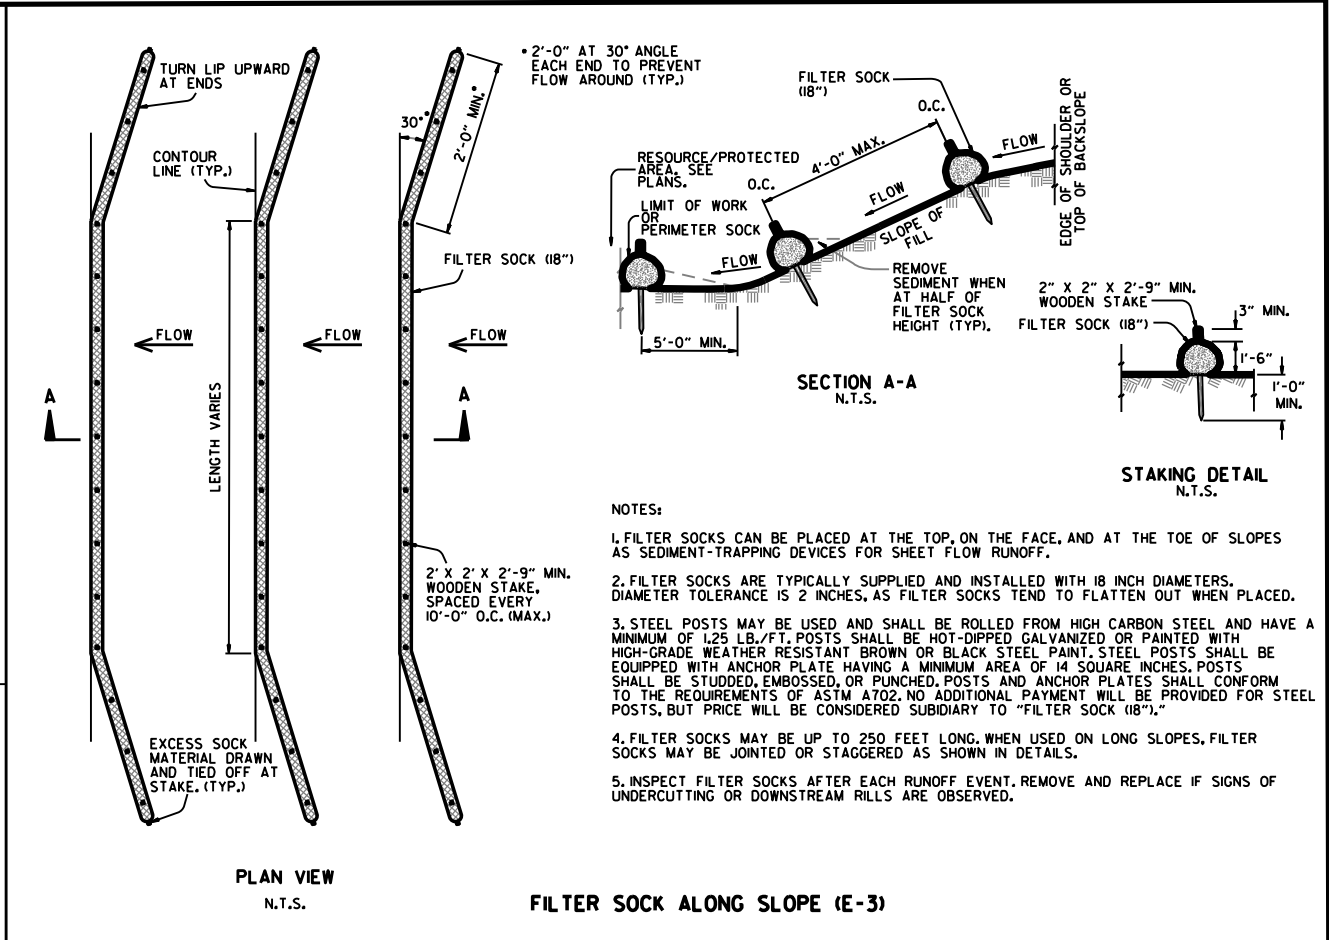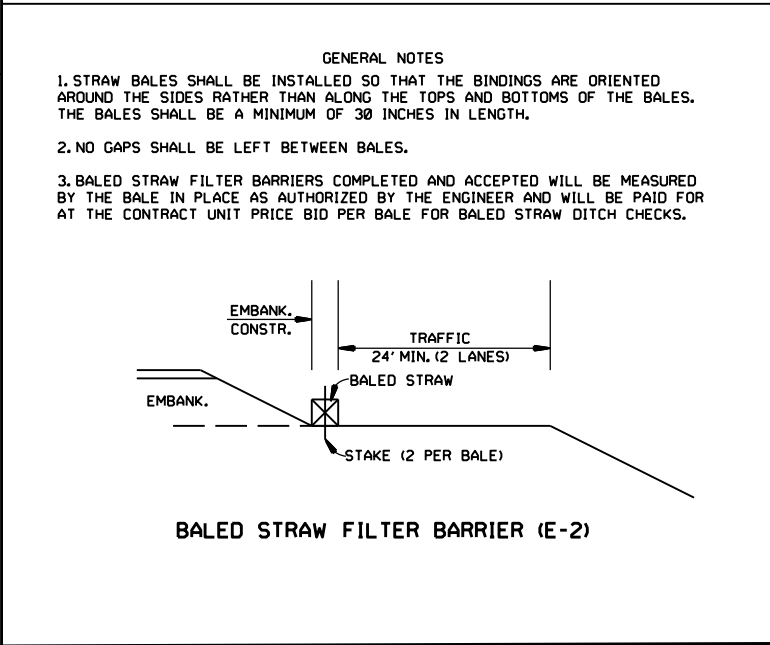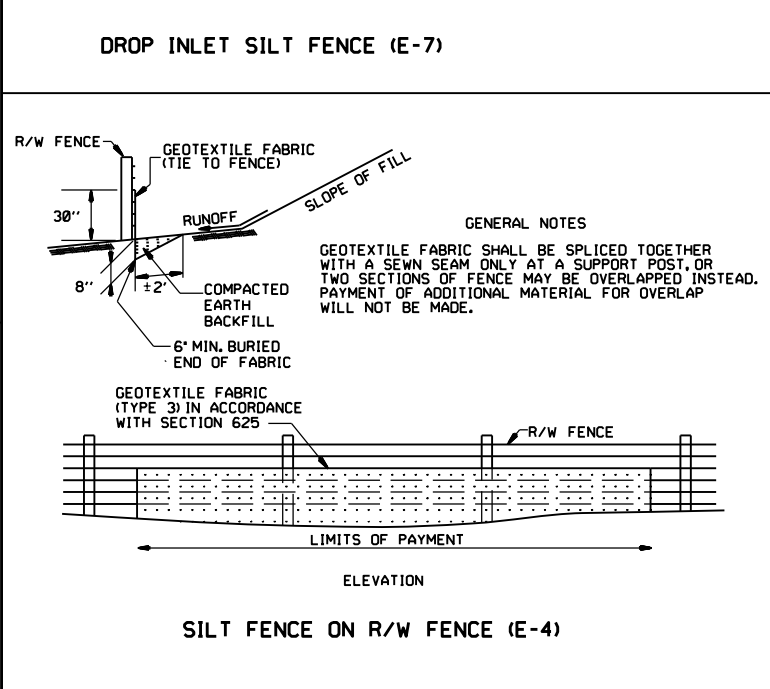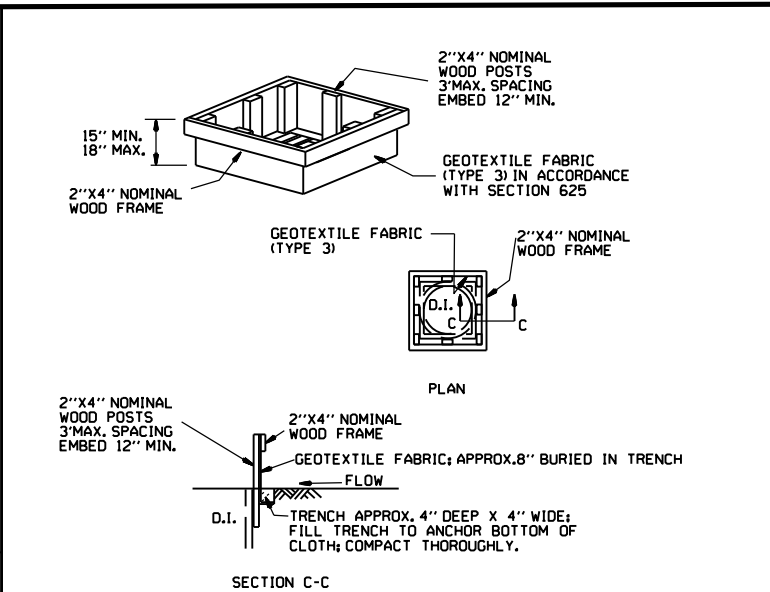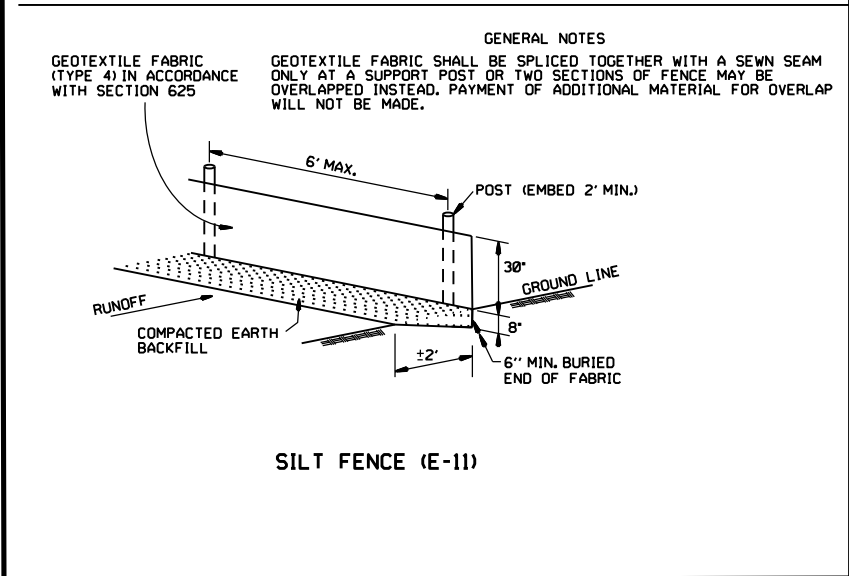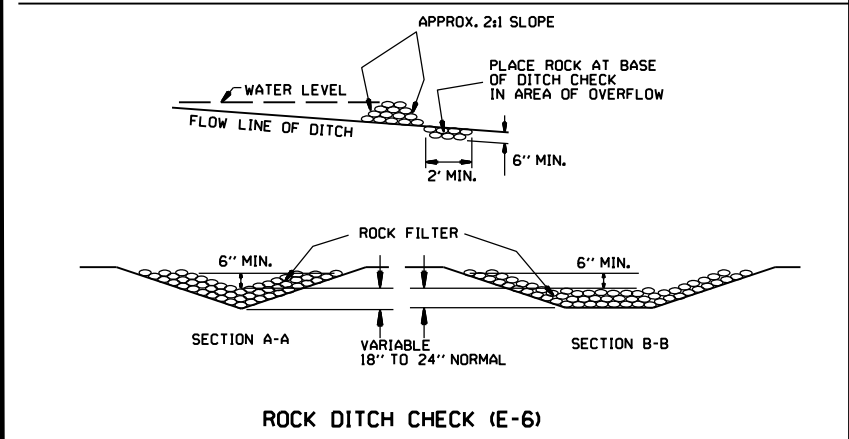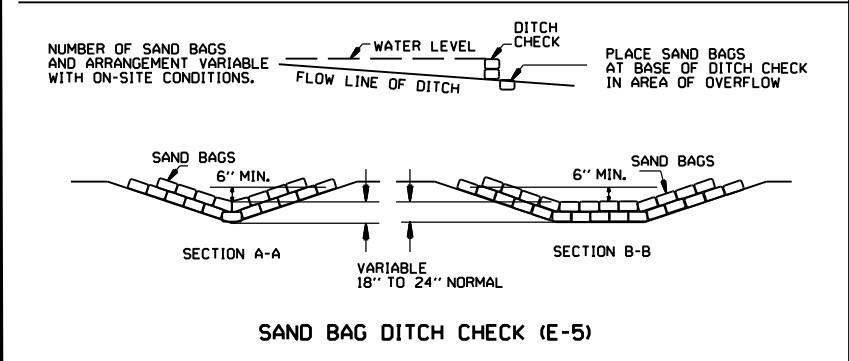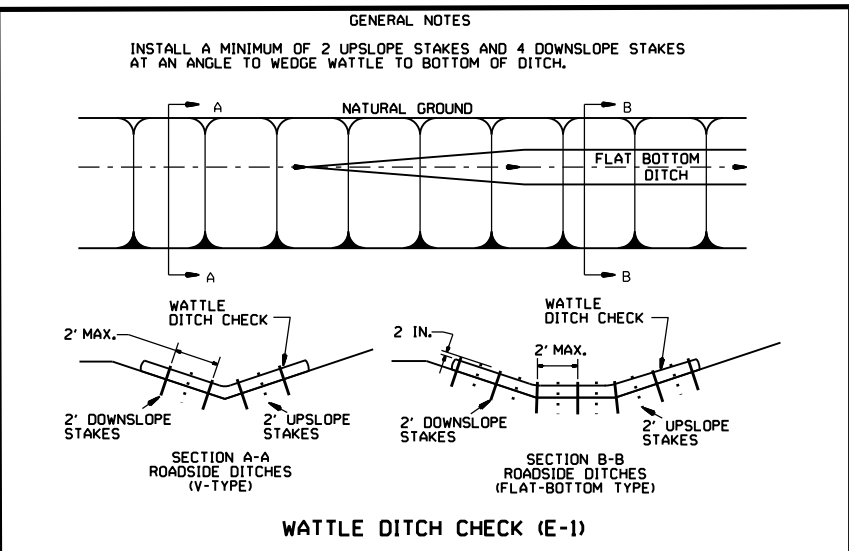


11-16-17	ADDED FILTER SOCK E-3 AND E-13	
12-15-11	DELETED BALED STRAW DITCH CHECK & ADDED WATTLE DITCH CHECK	
11-18-98	ADDED NOTES	
07-02-98	ADDED BALED STRAW FILTER BARRIER (E-2)	
07-20-95	REVISED SILTS FENCE E-4 AND E-11	7-20-95
07-15-94	REV. E-4 & E-11 MIN. 13" BURIED END OF FABRIC	
06-02-94	REVISED E-1, 4, 7 & 11; DELETED E-2 & 3	6-2-94
04-01-93	REDRAWN	
10-01-92	REDRAWN	
08-02-76	ISSUED R.D.M.	298-7-28-76
DATE	REVISION	FILMED


ARKANSAS STATE HIGHWAY COMMISSION

TEMPORARY EROSION CONTROL DEVICES


STANDARD DRAWING TEC-1

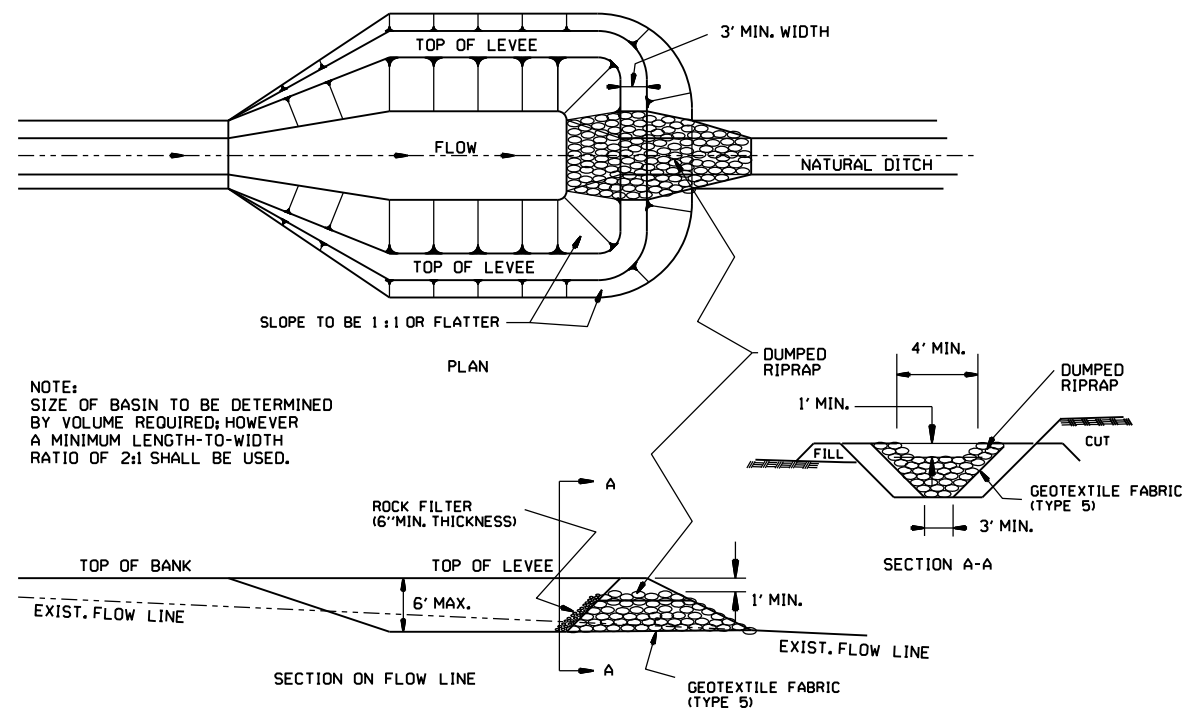


SEDIMENT BASIN WITH RIPRAP OUTLET (E-9)

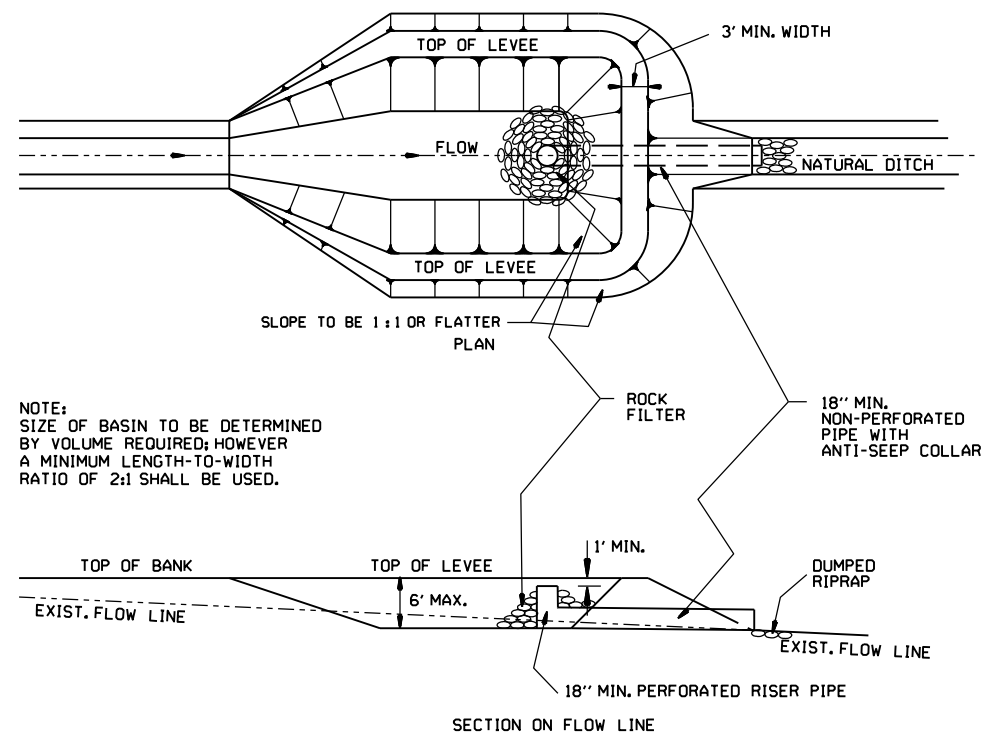


SEDIMENT BASIN WITH PIPE OUTLET (E-10)



DIVERSION DITCH (E-8)

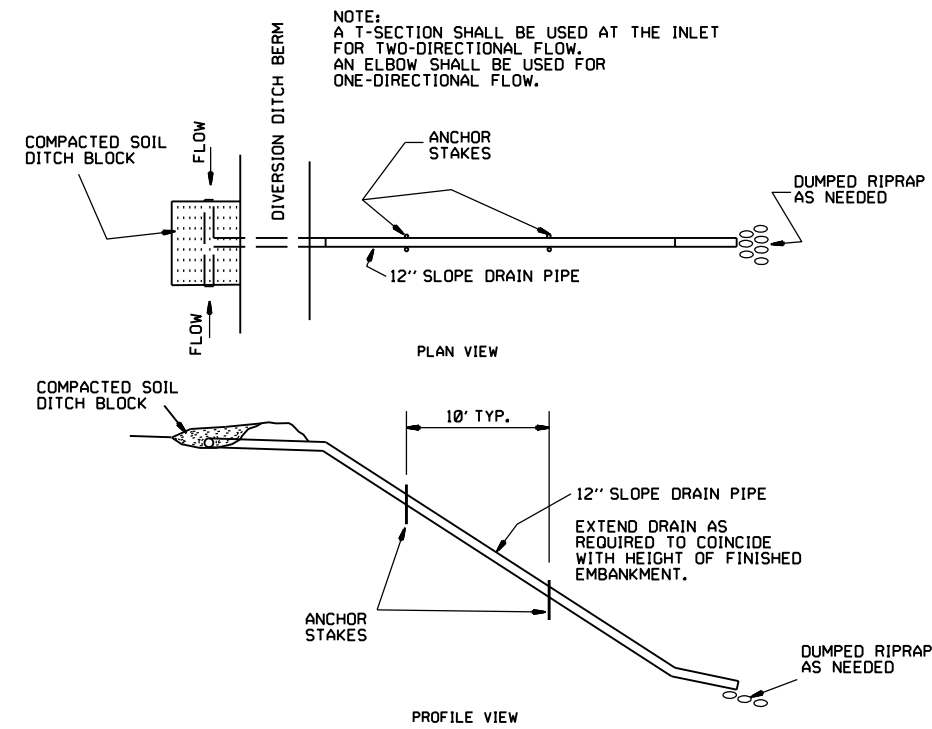

SLOPE DRAIN (E-12)

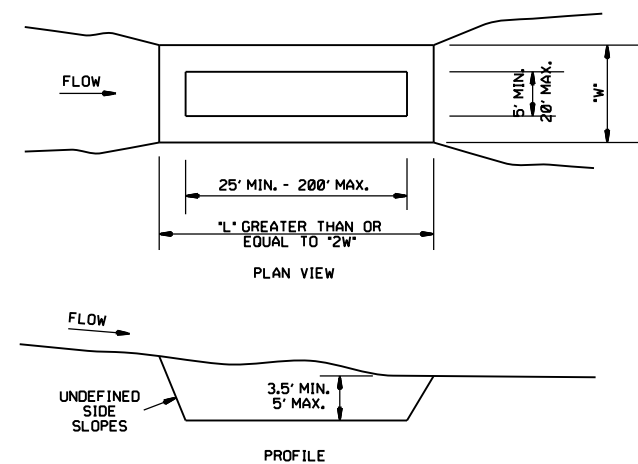


SEDIMENT BASIN (E-14)

			ARKANSAS STATE HIGHWAY COMMISSION
			TEMPORARY EROSION CONTROL DEVICES
6-2-94	Revised E-8 & E-12; Added E-14 & Deleted E-13		STANDARD DRAWING TEC-2
4-1-93	ISSUED		
DATE	REVISION	FILMED	

CLEARING AND GRUBBING

- CONSTRUCTION SEQUENCE
- 1. PLACE PERIMETER CONTROLS (I.E. SILT FENCES ,DIVERSION DITCHES, SEDIMENT BASINS, ETC.)
 - 2. PERFORM CLEARING AND GRUBBING OPERATION.

EXCAVATION

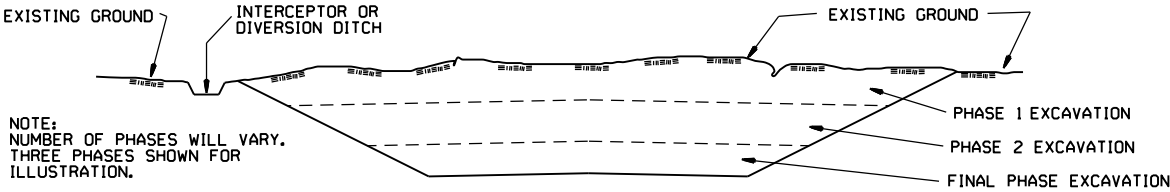


GENERAL NOTE

ALL CUT SLOPES SHALL BE DRESSED, PREPARED, SEEDED, AND MULCHED AS THE WORK PROGRESSES. SLOPES SHALL BE EXCAVATED AND STABILIZED IN EQUAL INCREMENTS NOT TO EXCEED 25 FEET, MEASURED VERTICALLY.

- CONSTRUCTION SEQUENCE
- 1. EXCAVATE AND STABILIZE INTERCEPTOR AND/OR DIVERSION DITCHES.
 - 2. PERFORM PHASE 1 EXCAVATION. PLACE PERMANENT OR TEMPORARY SEEDING.
 - 3. PERFORM PHASE 2 EXCAVATION. PLACE PERMANENT OR TEMPORARY SEEDING.
 - 4. PERFORM FINAL PHASE OF EXCAVATION. PLACE PERMANENT OR TEMPORARY SEEDING. STABILIZE DITCHES. CONSTRUCT DITCH CHECKS, DIVERSION DITCHES, SEDIMENT BASINS, OR OTHER EROSION CONTROL DEVICES AS REQUIRED.

EMBANKMENT

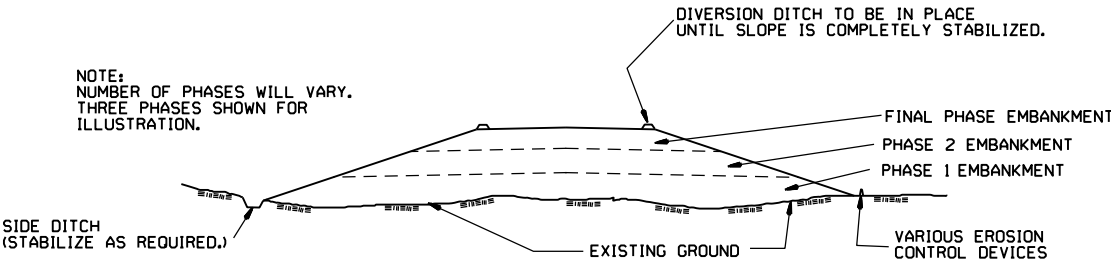

GENERAL NOTE

ALL EMBANKMENT SLOPES SHALL BE DRESSED, PREPARED, SEEDED, AND MULCHED AS THE WORK PROGRESSES. SLOPES SHALL BE CONSTRUCTED AND STABILIZED IN EQUAL INCREMENTS NOT TO EXCEED 25 FEET, MEASURED VERTICALLY.

- CONSTRUCTION SEQUENCE
- 1. CONSTRUCT DIVERSION DITCHES, DITCH CHECKS, SEDIMENT BASINS, SILT FENCES, OR OTHER EROSION CONTROL DEVICES AS SPECIFIED.
 - 2. PLACE PHASE 1 EMBANKMENT WITH PERMANENT OR TEMPORARY SEEDING. PROVIDE DIVERSION DITCHES AND SLOPE DRAINS IF EMBANKMENT CONSTRUCTION IS TO BE TEMPORARILY ABANDONED FOR A PERIOD OF GREATER THAN 21 DAYS.
 - 3. PLACE PHASE 2 EMBANKMENT WITH PERMANENT OR TEMPORARY SEEDING. PROVIDE DIVERSION DITCHES AND SLOPE DRAINS IF EMBANKMENT CONSTRUCTION IS TO BE TEMPORARILY ABANDONED FOR A PERIOD OF GREATER THAN 21 DAYS.
 - 4. PLACE FINAL PHASE OF EMBANKMENT WITH PERMANENT OR TEMPORARY SEEDING. PLACE DIVERSION DITCHES AND SLOPE DRAINS AND MAINTAIN UNTIL ENTIRE SLOPE IS STABILIZED.

			ARKANSAS STATE HIGHWAY COMMISSION
			TEMPORARY EROSION CONTROL DEVICES
11-03-94	CORRECTED SPELLING		STANDARD DRAWING TEC-3
6-2-94	Drawn & Issued	6-2-94	
DATE	REVISION	FILMED	