

ARKANSAS STATE HIGHWAY COMMISSION

PROPOSAL DOCUMENTS

FOR THE CONSTRUCTION OF

STATE JOB NO. A20044

FEDERAL AID PROJECT STPR-0001(103)

HWY. 165 – HWY. 152 (S)

STATE HIGHWAY 130 SECTION 6

IN ARKANSAS COUNTY

Bound herein are the Supplemental Specifications, Special Provisions, Proposal Documents and Schedule of Items applicable to this proposed construction contract.

Applicable to this proposed construction contract, but not bound herein, are the Arkansas State Highway Commission Standard Specifications for Highway Construction, Edition of 2014, and the Construction Plans.



CAUTION TO BIDDERS

Please review Section 102 of the Standard Specifications, 2014 Edition for Bidding Requirements and Conditions. Mistakes or omissions can be costly. Important items for you to check are included in, but not limited to, those listed below. This checklist is furnished only to assist you in submitting a proper bid. Check as you read.

- ☐ Have you contacted ARDOT (pmd@ardot.gov or 501-569-2261) to become an eligible bidder? This is required to submit a bid in the letting and must occur by 4:30pm the day prior to the letting.
- ☐ Have you acknowledged all Addenda by email or fax?
- ☐ Is the unit price entered appropriate for the item?
- ☐ Have you entered a unit price for each bid item except in the case of authorized alternate pay items? (A zero bid (\$0.00) is a valid price and will be considered.)
- ☐ Have you checked the Schedule of Items for various pay items that may have a minimum or maximum unit bid price? (Refer to the Standard Specifications for further information concerning these items)
 - ✓ Asphalt Binder
 - ✓ Relocating Precast Concrete Barrier
 - ✓ Water
 - ✓ Mobilization
- ☐ Have you limited your bid for Mobilization to five percent (5%) of the subtotal?
- ☐ For Federal-aid projects, did you complete the Certification for Federal aid Contracts?
- ☐ Prior to submitting your bid, did you check for error messages, and are all the folders "green"?
- ☐ If submitting a paper copy of the Proposal Guaranty (Bid Bond) is it signed by an officer of your company **AND** the Surety Agent?
- ☐ Did you ensure your Proposal Guaranty (if you are submitting a paper bond) will arrive prior to the time and date stated on Page 2 of the Proposal Documents?

1-17-08
Revised: 6-1-09
Revised: 2-15-12
Revised: 1-15-15
Revised: 5-26-16
Revised: 11-17-17
Revised: 7-5-23
Revised: 8-4-25
Revised: 12-18-25
Revised: 9-24-26

Arkansas Department of Transportation

Notice of Nondiscrimination

The Arkansas Department of Transportation (ARDOT) complies with all civil rights provisions of federal statutes and related authorities that prohibit discrimination in programs and activities receiving federal financial assistance. Therefore, ARDOT does not discriminate on the basis of race, sex, color, age, national origin, religion (not applicable as a protected group under the FMCSA Title VI Program), or disability in the admission, access to and treatment in ARDOT's programs and activities, as well as ARDOT's hiring or employment practices. Complaints of alleged discrimination and inquiries regarding ARDOT's nondiscrimination policies may be directed to the Civil Rights Division at P.O. Box 2261, Little Rock, AR 72203, (501) 569-2298, (Voice/TTY 711); or Civil.Rights@ardot.gov.

Free language assistance may be available upon request.

This notice is available from the ADA/504/Title VI Coordinator in large print, on audiotape, and in Braille.

TITLE VI CONTRACT PROVISIONS

APPENDIX A

During the performance of this contract, the contractor, for itself, its assignees and successors in interest (hereinafter referred to as the “contractor”) agrees as follows:

(1) Compliance with Regulations: The contractor (hereinafter includes consultants) will comply with the Acts and the Regulations relative to Non-discrimination in Federally-assisted programs of the U.S. Department of Transportation, Federal Highway Administration, as they may be amended from time to time, which are herein incorporated by reference and made a part of this contract.

(2) Nondiscrimination: The contractor, with regard to the work performed by it during the contract, will not discriminate on the grounds of race, color, or national origin in the selection and retention of subcontractors, including procurements of materials and leases of equipment. The contractor will not participate directly or indirectly in the discrimination prohibited by the Acts and the Regulations, including employment practices when the contract covers any activity, project, or program set forth in Appendix B of 49 CFR Part 21.

(3) Solicitations for Subcontracts, Including Procurements of Materials and Equipment: In all solicitations, either by competitive bidding, or negotiation made by the contractor for work to be performed under a subcontract, including procurements of materials, or leases of equipment, each potential subcontractor or supplier will be notified by the contractor of the contractor's obligations under this contract and the Acts and the Regulations relative to Nondiscrimination on the grounds of race, color, or national origin.

(4) Information and Reports: The contractor will provide all information and reports required by the Acts, the Regulations, and directives issued pursuant thereto and will permit access to its books, records, accounts, other sources of information, and its facilities as may be determined by the Recipient or the Federal Highway Administration to be pertinent to ascertain compliance with such Acts, Regulations, and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish the information, the contractor will so certify to the Recipient or the Federal Highway Administration, as appropriate, and will set forth what efforts it has made to obtain the information.

(5) Sanctions for Noncompliance: In the event of a contractor's noncompliance with the Nondiscrimination provisions of this contract, the Recipient will impose such contract sanctions as it or the Federal Highway Administration may determine to be appropriate, including, but not limited to:

- (a) Withholding of payments to the contractor under the contract until the contractor complies, and/or
- (b) Cancelling, terminating or suspending a contract, in whole or in part.

(6) Incorporation of Provisions: The contractor will include the provisions of paragraphs one through six in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations and directives issued pursuant thereto. The contractor will take action with respect to any subcontract or procurement as the Recipient or the Federal Highway Administration may direct as a means of enforcing such provisions including sanctions for noncompliance. Provided, that if the contractor becomes involved in, or is threatened with litigation by a subcontractor, or supplier because of such direction, the contractor may request the Recipient to enter into any litigation to protect the interests of the Recipient. In addition, the contractor may request the United States to enter into the litigation to protect the interests of the United States.

TITLE VI CONTRACT PROVISIONS

APPENDIX E

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees to comply with the following non-discrimination statutes and authorities; including but not limited to:

Pertinent Non-Discrimination Authorities:

- Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d et seq., 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin); and 49 CFR Part 21.
- The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, (42 U.S.C. § 4601), (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);
- Federal-Aid Highway Act of 1973, (23 U.S.C. § 324 et seq.), (prohibits discrimination on the basis of sex);
- Section 504 of the Rehabilitation Act of 1973, (29 U.S.C. § 794 et seq.), as amended, (prohibits discrimination on the basis of disability); and 49 CFR Part 27;
- The Age Discrimination Act of 1975, as amended, (42 U.S.C. § 6101 et seq.), (prohibits discrimination on the basis of age);
- Airport and Airway Improvement Act of 1982, (49 USC§ 471, Section 47123), as amended, (prohibits discrimination based on race, creed, color, national origin, or sex);
- The Civil Rights Restoration Act of 1987, (PL 100-209), (Broadened the scope, coverage and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975 and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms "programs or activities" to include all of the programs or activities of the Federal-aid recipients, sub-recipients and contractors, whether such programs or activities are Federally funded or not);
- Titles II and III of the Americans with Disabilities Act, which prohibit discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§ 12131-12189) as implemented by Department of Transportation regulations at 49 C.F.R. parts 37 and 38;
- The Federal Aviation Administration's Non-discrimination statute (49 U.S.C. § 47123) (prohibits discrimination on the basis of race, color, national origin, and sex);
- Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which ensures Non-discrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;
- Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of Limited English proficiency (LEP). To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100);
- Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating because of sex in education programs or activities (20 U.S.C. 1681et seq).

Arkansas Department of Transportation
Supplemental Specifications and Special Provisions Listing
State Job Number A20044

The following supplemental specifications and special provisions for this project supplement the standard specifications, edition of 2014. In case of conflict, the supplemental specifications and special provisions shall govern.

ERRATA	ERRATA FOR THE BOOK OF STANDARD SPECIFICATIONS
FHWA-1273	REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - NOTICE TO CONTRACTORS
FHWA-1273	SUPPLEMENT - SPECIFIC EQUAL EMPLOYMENT OPPORTUNITY RESPONSIBILITIES (23 U.S.C. 140)
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - GOALS AND TIMETABLES
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - FEDERAL STANDARDS
FHWA-1273	SUPPLEMENT - POSTERS AND NOTICES REQUIRED FOR FEDERAL-AID PROJECTS
FHWA-1273	SUPPLEMENT - WAGE RATE DETERMINATION
FHWA-1273	SUPPLEMENT - TRAINING PROGRAM - JOB A20044
JOB SP	CARGO PREFERENCE ACT REQUIREMENTS
JOB SP	PROHIBITION OF CERTAIN TELECOMMUNICATIONS AND VIDEO SURVEILLANCE SERVICES OR EQUIPMENT
JOB SP	BUY AMERICA - CONSTRUCTION MATERIALS
JOB SP	VENDOR REGISTRATION REQUIREMENT
JOB SP	DOCUMENTATION OF PAYMENTS MADE – PROMPT PAYMENT (SIGNET)
JOB SP	BIDDING REQUIREMENTS AND CONDITIONS
JOB SP	MANDATORY ELECTRONIC CONTRACT
JOB SP	MANDATORY ELECTRONIC DOCUMENT SUBMITTAL
JOB SP	LIQUIDATED DAMAGES PROCEDURE FOR BID LETTINGS
JOB SP	ELECTRONIC TICKETING SYSTEMS (E-TICKETING)
JOB SP	DESIGN AND QUALITY CONTROL OF ASPHALT MIXTURES
JOB SP	LONGITUDINAL JOINT DENSITIES FOR ACHM SURFACE COURSES
JOB SP	SUBMISSION OF ASPHALT CONCRETE HOT MIX ACCEPTANCE TEST RESULTS
JOB SP	PRICE ADJUSTMENT FOR ASPHALT BINDER
JOB SP	PRICE ADJUSTMENT FOR FUEL
JOB SP	WARM MIX ASPHALT
JOB SP	COLD MILLING - COUNTY PROPERTY
JOB SP	CONSTRUCTION PROJECT INFORMATION SIGN
JOB SP	ROADWAY CONSTRUCTION CONTROL – PAVEMENT PRESERVATION
JOB SP	RUMBLE STRIPS
JOB SP	PORTABLE TRAFFIC SIGNAL SYSTEM
JOB SP	WATER POLLUTION CONTROL
JOB SP	PRIME CONTRACTOR PERFORMANCE EVALUATION
SP 108-1	LIQUIDATED DAMAGES
SS 100-3	CONTRACTOR'S LICENSE
SS 100-4	DEPARTMENT NAME CHANGE

Arkansas Department of Transportation
Supplemental Specifications and Special Provisions Listing
State Job Number A20044

The following supplemental specifications and special provisions for this project supplement the standard specifications, edition of 2014. In case of conflict, the supplemental specifications and special provisions shall govern.

SS 102-2	ISSUANCE OF PROPOSALS
SS 102-3	PREQUALIFICATION OF BIDDERS
SS 103-2	CONTACT INFORMATION FOR MOTORIST DAMAGE CLAIMS
SS 105-4	MAINTENANCE DURING CONSTRUCTION
SS 107-2	RESTRAINING CONDITIONS
SS 108-2	WORK ALLOWED PRIOR TO ISSUANCE OF WORK ORDER
SS 108-3	WORK ORDER FOR FIXED COMPLETION DATE CONTRACTS
SS 303-1	AGGREGATE BASE COURSE
SS 306-1	QUALITY CONTROL AND ACCEPTANCE
SS 307-2	CEMENT TREATED BASE COURSE
SS 308-2	CEMENT STABILIZED CRUSHED STONE BASE COURSE
SS 400-1	TACK COATS
SS 400-4	DESIGN AND QUALITY CONTROL OF ASPHALT MIXTURES
SS 400-5	PERCENT AIR VOIDS FOR ACHM MIX DESIGNS
SS 400-6	LIQUID ANTI-STRIP ADDITIVE
SS 400-7	TRACKLESS TACK
SS 404-3	DESIGN OF ASPHALT MIXTURES
SS 409-2	ASPHALT LABORATORY FACILITY
SS 410-1	CONSTRUCTION REQUIREMENTS AND ACCEPTANCE OF ASPHALT CONCRETE PLANT MIX COURSES
SS 410-2	DEVICES FOR MEASURING DENSITY FOR ROLLING PATTERNS
SS 410-4	EVALUATION OF ACHM SUBLOT REPLACEMENT MATERIAL
SS 416-1	RECYCLED ASPHALT PAVEMENT
SS 501-3	PORTLAND CEMENT CONCRETE PAVEMENT
SS 600-2	INCIDENTAL CONSTRUCTION
SS 603-1	LANE CLOSURE NOTIFICATION
SS 604-1	RETROREFLECTIVE SHEETING FOR TRAFFIC CONTROL DEVICES IN CONSTRUCTION ZONES
SS 604-3	TRAFFIC CONTROL DEVICES IN CONSTRUCTION ZONES (MASH)
SS 604-4	CLASSIFICATION AND APPLICATION OF MARKINGS
SS 617-1	GUARDRAIL TERMINAL (TYPE 2)
SS 617-2	GUARDRAIL DELINEATORS
SS 620-1	MULCH COVER
SS 734-1	BRIDGE END TERMINAL
SS 802-5	CONCRETE FOR STRUCTURES
SS 804-2	REINFORCING STEEL FOR STRUCTURES

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
ERRATA FOR THE BOOK OF STANDARD SPECIFICATIONS

Errors noted in the printed book of Standard Specifications for Highway Construction, Edition of 2014, are listed below and this publication is hereby revised as follows:

- Page 124: The third sentence of the first paragraph of Subsection 110.03(c) should read: The Engineer will make a decision within 10 business days concerning the necessity or practicability of the request.
- Page 195: The sixth paragraph of subsection 303.02 should read: For Classes 1 through 8 materials, the fraction passing the #200 (0.075 mm) sieve shall not be greater than three-fourths of the fraction passing the #40 (0.0425 mm) sieve. For Classes 3 through 8, the fraction passing the #40 (0.425 mm) sieve shall have a liquid limit not greater than 25.
- Page 363: In the second paragraph of Subsection 502.02, the reference to ASTM 775 should be replaced by “ASTM A 775”.
- Page 636: In the second paragraph of Subsection 730.02, the references to AASHTO M 183 should be replaced with ASTM A36.
- Page 637: The last sentence of the second paragraph of Subsection 730.03 should read: All bolts, nuts, and washers shall be galvanized according to AASHTO M 232 or ASTM B 695, Class 40 or 50.
- Page 767: In the fourth paragraph of Subsection 807.06(a), the reference to ASTM B595 should be replaced by “ASTM B695”.
- Page 841: Subsection 817.04(a) should read: The treatment of lumber and timber shall meet the applicable requirements of the current edition of the AWP, Standards U1, Commodity Specification E, Use Category UC4C.

CONTRACT PROVISIONS FOR FEDERAL-AID CONSTRUCTION CONTRACTS

- I. General
- II. Nondiscrimination
- III. Davis-Bacon and Related Act Provisions
- IV. Contract Work Hours and Safety Standards Act Provisions
- V. Subletting or Assigning the Contract
- VI. Safety: Accident Prevention
- VII. False Statements Concerning Highway Projects
- VIII. Implementation of Clean Air Act and Federal Water Pollution Control Act
- IX. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion
- X. Certification Regarding Use of Contract Funds for Lobbying
- XI. Use of United States-Flag Vessels

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only).

I. GENERAL

1. Historically, contracting agencies using Federal-aid highway funds were required to ensure Form FHWA-1273 was physically incorporated into all contracts and subcontracts. Effective June 10, 2026, this requirement was eliminated [91 FR 25492]. Future use of Form FHWA-1273 is now optional on the part of the contracting agency using Federal-aid highway funds. FHWA continues to make Form FHWA-1273 available as a convenience to contracting agencies. Contracting agencies must continue to ensure compliance with the provisions cited in Form FHWA-1273 in accordance with the provisions regardless of the use of Form FHWA-1273. Accordingly, the contracting agency retains the authority to determine whether the contractor must use Form FHWA-1273 to physically incorporate required contract provisions in each subcontract and in lower tier contracts. Where permitted by the contracting agency, the contractor may choose other ways to include required contract provisions in each subcontract, besides incorporating Form FHWA-1273. Contract provisions in Form FHWA-1273 are not required to be physically included in subcontracts for design services on Federal-aid design-build contracts, or in purchase orders, rental agreements and other agreements for supplies or services.

The applicable provisions of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor or design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in solicitation-for-bids or request-for-proposals documents.

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's

immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. 23 U.S.C. 114(b). The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors. 23 U.S.C. 101(a).

II. NONDISCRIMINATION

The contractor and all subcontractors must comply with the following policies: 29 CFR Parts 1625-1627, 23 U.S.C. 140, Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. 794), Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C. 2000d et seq.), and related regulations including 49 CFR Parts 21, 26, and 27, including any amendments thereto.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with 29 CFR Parts 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with 23 U.S.C. 140, Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. 794), and Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C. 2000d et seq.), and related regulations including 49 CFR Parts 21, 26, and 27, including any amendments thereto.

The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR Part 35 and 29 CFR Part 1630 are incorporated by reference in this contract.

1. Assurances Required:

a. The requirements of 49 CFR Part 26, including any amendments thereto, and the State DOT's FHWA-approved Disadvantaged Business Enterprise (DBE) program are incorporated by reference.

b. The contractor, subrecipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR part 26, including any amendments thereto, in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate, which may include, but is not limited to:

- (1) Withholding monthly progress payments;
- (2) Assessing sanctions;
- (3) Liquidated damages; and/or
- (4) Disqualifying the contractor from future bidding as non-responsible.

c. The Title VI and nondiscrimination provisions of U.S. DOT Order 1050.2A at Appendixes A and E, including any amendments thereto, are incorporated by reference. 49 CFR Part 21.

III. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding \$2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size), in accordance with 29 CFR 5.5. The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. 23 U.S.C. 113. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. 23 U.S.C. 101. Where applicable law requires that projects be treated as a project on a Federal-aid highway, the provisions of this subpart will apply regardless of the location of the project. Examples include: Surface Transportation Block Grant Program projects funded under 23 U.S.C. 133 [excluding recreational trails projects], the Nationally Significant Freight and Highway Projects funded under 23 U.S.C. 117, and National Highway Freight Program projects funded under 23 U.S.C. 167.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages (29 CFR 5.5)

a. *Wage rates and fringe benefits.* All laborers and mechanics employed or working upon the site of the work (or otherwise working in construction or development of the project under a development statute), will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act ([29 CFR part 3](#))), the full amount of basic hourly wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics. As provided in paragraphs (d) and (e) of 29 CFR 5.5, the appropriate wage determinations are effective by operation of law even if they have not been attached to the contract. Contributions made or costs reasonably anticipated for bona fide fringe benefits under the Davis-Bacon Act ([40 U.S.C. 3141\(2\)\(B\)](#)) on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.e. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics must be paid the appropriate wage rate and fringe benefits on the wage determination for the classification(s) of work actually performed, without regard to skill, except as provided in

paragraph 4. of this section. Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: *Provided*, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classifications and wage rates conformed under paragraph 1.c. of this section) and the Davis-Bacon poster (WH-1321) must be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b. *Frequently recurring classifications.* (1) In addition to wage and fringe benefit rates that have been determined to be prevailing under the procedures set forth in [29 CFR part 1](#), a wage determination may contain, pursuant to § 1.3(f), wage and fringe benefit rates for classifications of laborers and mechanics for which conformance requests are regularly submitted pursuant to paragraph 1.c. of this section, provided that:

(i) The work performed by the classification is not performed by a classification in the wage determination for which a prevailing wage rate has been determined;

(ii) The classification is used in the area by the construction industry; and

(iii) The wage rate for the classification bears a reasonable relationship to the prevailing wage rates contained in the wage determination.

(2) The Administrator will establish wage rates for such classifications in accordance with paragraph 1.c.(1)(iii) of this section. Work performed in such a classification must be paid at no less than the wage and fringe benefit rate listed on the wage determination for such classification.

c. *Conformance.* (1) The contracting officer must require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract be classified in conformance with the wage determination. Conformance of an additional classification and wage rate and fringe benefits is appropriate only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(ii) The classification is used in the area by the construction industry; and

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) The conformance process may not be used to split, subdivide, or otherwise avoid application of classifications listed in the wage determination.

(3) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the

classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken will be sent by the contracting officer by email to DBAconformance@dol.gov. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(4) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer will, by email to DBAconformance@dol.gov, refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Administrator for determination. The Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(5) The contracting officer must promptly notify the contractor of the action taken by the Wage and Hour Division under paragraphs 1.c.(3) and (4) of this section. The contractor must furnish a written copy of such determination to each affected worker or it must be posted as a part of the wage determination. The wage rate (including fringe benefits where appropriate) determined pursuant to paragraph 1.c.(3) or (4) of this section must be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

d. Fringe benefits not expressed as an hourly rate. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor may either pay the benefit as stated in the wage determination or may pay another bona fide fringe benefit or an hourly cash equivalent thereof.

e. Unfunded plans. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, *Provided*, That the Secretary of Labor has found, upon the written request of the contractor, in accordance with the criteria set forth in § 5.28, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

f. Interest. In the event of a failure to pay all or part of the wages required by the contract, the contractor will be required to pay interest on any underpayment of wages.

2. Withholding (29 CFR 5.5)

a. Withholding requirements. The contracting agency may, upon its own action, or must, upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor so much of the accrued payments or advances as may be considered

necessary to satisfy the liabilities of the prime contractor or any subcontractor for the full amount of wages and monetary relief, including interest, required by the clauses set forth in this section for violations of this contract, or to satisfy any such liabilities required by any other Federal contract, or federally assisted contract subject to Davis-Bacon labor standards, that is held by the same prime contractor (as defined in § 5.2). The necessary funds may be withheld from the contractor under this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract that is subject to Davis-Bacon labor standards requirements and is held by the same prime contractor, regardless of whether the other contract was awarded or assisted by the same agency, and such funds may be used to satisfy the contractor liability for which the funds were withheld. In the event of a contractor's failure to pay any laborer or mechanic, including any apprentice or helper working on the site of the work all or part of the wages required by the contract, or upon the contractor's failure to submit the required records as discussed in paragraph 3.d. of this section, the contracting agency may on its own initiative and after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

b. Priority to withheld funds. The Department has priority to funds withheld or to be withheld in accordance with paragraph 2.a. of this section or Section IV, paragraph 3.a., or both, over claims to those funds by:

- (1) A contractor's surety(ies), including without limitation performance bond sureties and payment bond sureties;
- (2) A contracting agency for its repurchase costs;
- (3) A trustee(s) (either a court-appointed trustee or a U.S. trustee, or both) in bankruptcy of a contractor, or a contractor's bankruptcy estate;
- (4) A contractor's assignee(s);
- (5) A contractor's successor(s); or
- (6) A claim asserted under the Prompt Payment Act, [31 U.S.C. 3901](#)–3907.

3. Records and certified payrolls (29 CFR 5.5)

a. Basic record requirements (1) Length of record retention. All regular payrolls and other basic records must be maintained by the contractor and any subcontractor during the course of the work and preserved for all laborers and mechanics working at the site of the work (or otherwise working in construction or development of the project under a development statute) for a period of at least 3 years after all the work on the prime contract is completed.

(2) Information required. Such records must contain the name; Social Security number; last known address, telephone number, and email address of each such worker; each worker's correct classification(s) of work actually performed; hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in [40 U.S.C. 3141\(2\)\(B\)](#) of the Davis-Bacon Act); daily and weekly number

of hours actually worked in total and on each covered contract; deductions made; and actual wages paid.

(3) *Additional records relating to fringe benefits.* Whenever the Secretary of Labor has found under paragraph 1.e. of this section that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in [40 U.S.C. 3141\(2\)\(B\)](#) of the Davis-Bacon Act, the contractor must maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits.

(4) *Additional records relating to apprenticeship.* Contractors with apprentices working under approved programs must maintain written evidence of the registration of apprenticeship programs, the registration of the apprentices, and the ratios and wage rates prescribed in the applicable programs.

b. *Certified payroll requirements* (1) *Frequency and method of submission.* The contractor or subcontractor must submit weekly, for each week in which any DBA- or Related Acts-covered work is performed, certified payrolls to the contracting agency. The prime contractor is responsible for the submission of all certified payrolls by all subcontractors. A contracting agency or prime contractor may permit or require contractors to submit certified payrolls through an electronic system, as long as the electronic system requires a legally valid electronic signature; the system allows the contractor, the contracting agency, and the Department of Labor to access the certified payrolls upon request for at least 3 years after the work on the prime contract has been completed; and the contracting agency or prime contractor permits other methods of submission in situations where the contractor is unable or limited in its ability to use or access the electronic system.

(2) *Information required.* The certified payrolls submitted must set out accurately and completely all of the information required to be maintained under paragraph 3.a.(2) of this section, except that full Social Security numbers and last known addresses, telephone numbers, and email addresses must not be included on weekly transmittals. Instead, the certified payrolls need only include an individually identifying number for each worker (e.g., the last four digits of the worker's Social Security number). The required weekly certified payroll information may be submitted using Optional Form WH-347 or in any other format desired. Optional Form WH-347 is available for this purpose from the Wage and Hour Division website at <https://www.dol.gov/sites/dolgov/files/WHD/legacy/files/wh347.pdf> or its successor website. It is not a violation of this section for a prime contractor to require a subcontractor to provide full Social Security numbers and last known addresses, telephone numbers, and email addresses to the prime contractor for its own records, without weekly submission by the subcontractor to the contracting agency.

(3) *Statement of Compliance.* Each certified payroll submitted must be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor, or the contractor's or subcontractor's agent who pays or supervises the payment of the persons working on the contract, and must certify the following:

(i) That the certified payroll for the payroll period contains the information required to be provided under paragraph 3.b. of this section, the appropriate information and basic records are being maintained under paragraph 3.a. of this section, and such information and records are correct and complete;

(ii) That each laborer or mechanic (including each helper and apprentice) working on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in [29 CFR part 3](#); and

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification(s) of work actually performed, as specified in the applicable wage determination incorporated into the contract.

(4) *Use of Optional Form WH-347.* The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 will satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(3) of this section.

(5) *Signature.* The signature by the contractor, subcontractor, or the contractor's or subcontractor's agent must be an original handwritten signature or a legally valid electronic signature.

(6) *Falsification.* The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under [18 U.S.C. 1001](#) and [31 U.S.C. 3729](#).

(7) *Length of certified payroll retention.* The contractor or subcontractor must preserve all certified payrolls during the course of the work and for a period of 3 years after all the work on the prime contract is completed.

c. *Contracts, subcontracts, and related documents.* The contractor or subcontractor must maintain this contract or subcontract and related documents including, without limitation, bids, proposals, amendments, modifications, and extensions. The contractor or subcontractor must preserve these contracts, subcontracts, and related documents during the course of the work and for a period of 3 years after all the work on the prime contract is completed.

d. *Required disclosures and access* (1) *Required record disclosures and access to workers.* The contractor or subcontractor must make the records required under paragraphs 3.a. through 3.c. of this section, and any other documents that the contracting agency, the State DOT, the FHWA, or the Department of Labor deems necessary to determine compliance with the labor standards provisions of any of the applicable statutes referenced by § 5.1, available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and must permit such representatives to interview workers during working hours on the job.

(2) *Sanctions for non-compliance with records and worker access requirements.* If the contractor or subcontractor fails to submit the required records or to make them available, or refuses to permit worker interviews during working hours on the job, the Federal agency may, after written notice to the contractor, sponsor, applicant, owner, or other entity, as the case may be, that maintains such records or that employs such workers, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available, or to permit worker interviews during working hours on the job, may be grounds for debarment action pursuant to § 5.12. In addition, any contractor or other person that fails to submit the required records or make those records available to WHD within the time WHD requests that the records be produced will be precluded from introducing as evidence in an administrative proceeding under [29 CFR part 6](#) any of the required records that were not provided or made available to WHD. WHD will take into consideration a reasonable request from the contractor or person for an extension of the time for submission of records. WHD will determine the reasonableness of the request and may consider, among other things, the location of the records and the volume of production.

(3) *Required information disclosures.* Contractors and subcontractors must maintain the full Social Security number and last known address, telephone number, and email address of each covered worker, and must provide them upon request to the contracting agency, the State DOT, the FHWA, the contractor, or the Wage and Hour Division of the Department of Labor for purposes of an investigation or other compliance action.

4. Apprentices and equal employment opportunity (29 CFR 5.5)

a. *Apprentices (1) Rate of pay.* Apprentices will be permitted to work at less than the predetermined rate for the work they perform when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship (OA), or with a State Apprenticeship Agency recognized by the OA. A person who is not individually registered in the program, but who has been certified by the OA or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice, will be permitted to work at less than the predetermined rate for the work they perform in the first 90 days of probationary employment as an apprentice in such a program. In the event the OA or a State Apprenticeship Agency recognized by the OA withdraws approval of an apprenticeship program, the contractor will no longer be permitted to use apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

(2) *Fringe benefits.* Apprentices must be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringe benefits must be paid in accordance with that determination.

(3) *Apprenticeship ratio.* The allowable ratio of apprentices to journeyworkers on the job site in any craft classification must not be greater than the ratio permitted to the contractor as to the entire work force under the registered program or the ratio applicable to the locality of the project pursuant to paragraph 4.a.(4) of this section. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated in paragraph 4.a.(1) of this section, must be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under this section must be paid not less than the applicable wage rate on the wage determination for the work actually performed.

(4) *Reciprocity of ratios and wage rates.* Where a contractor is performing construction on a project in a locality other than the locality in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyworker's hourly rate) applicable within the locality in which the construction is being performed must be observed. If there is no applicable ratio or wage rate for the locality of the project, the ratio and wage rate specified in the contractor's registered program must be observed.

b. *Equal employment opportunity.* The use of apprentices and journeyworkers under this part must be in conformity with [29 CFR part 30](#), including any amendments thereto.

c. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section III. 23 CFR 230.111(e)(2). The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeyworkers shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract as provided in 29 CFR 5.5.

6. Subcontracts. The contractor or subcontractor must insert in any subcontracts the clauses set forth in paragraphs (1) through (11) of this section, along with the applicable wage determination(s) and such other clauses or contract modifications as the contracting agency may by appropriate instructions require, and a clause requiring the subcontractors to include these clauses and wage determination(s) in any lower tier subcontracts. The prime contractor is responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in this section. In the event of any violations of these clauses, the prime contractor and any subcontractor(s) responsible will be liable for any unpaid wages and monetary relief, including interest from the date of the underpayment or loss, due to any workers of lower-tier subcontractors, and may be subject to debarment, as appropriate. 29 CFR 5.5.

7. Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the

contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract as provided in 29 CFR 5.5.

9. Disputes concerning labor standards. As provided in 29 CFR 5.5, disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility. a. By entering into this contract, the contractor certifies that neither it nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of [40 U.S.C. 3144\(b\)](#) or § 5.12(a).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of [40 U.S.C. 3144\(b\)](#) or § 5.12(a).

c. The penalty for making false statements is prescribed in the U.S. Code, Title 18 Crimes and Criminal Procedure, [18 U.S.C. 1001](#).

11. Anti-retaliation. It is unlawful for any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, or to cause any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, any worker or job applicant for:

a. Notifying any contractor of any conduct which the worker reasonably believes constitutes a violation of the DBA, Related Acts, this part, or [29 CFR part 1](#) or [3](#);

b. Filing any complaint, initiating or causing to be initiated any proceeding, or otherwise asserting or seeking to assert on behalf of themselves or others any right or protection under the DBA, Related Acts, this part, or [29 CFR part 1](#) or [3](#);

c. Cooperating in any investigation or other compliance action, or testifying in any proceeding under the DBA, Related Acts, this part, or [29 CFR part 1](#) or [3](#); or

d. Informing any other person about their rights under the DBA, Related Acts, this part, or [29 CFR part 1](#) or [3](#).

IV. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

Pursuant to 29 CFR 5.5(b), the following clauses apply to any Federal-aid construction contract in an amount in excess of \$100,000 and subject to the overtime provisions of the

Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchpersons and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek. 29 CFR 5.5.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph 1. of this section the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages and interest from the date of the underpayment. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchpersons and guards, employed in violation of the clause set forth in paragraph 1. of this section, in the sum currently provided in 29 CFR 5.5(b)(2)* for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph 1. of this section.

* \$33 as of January 15, 2025 (See 90 FR 1859) as may be adjusted annually by the Department of Labor, pursuant to the Federal Civil Penalties Inflation Adjustment Act of 1990.

3. Withholding for unpaid wages and liquidated damages

a. *Withholding process.* The FHWA or the contracting agency may, upon its own action, or must, upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor so much of the accrued payments or advances as may be considered necessary to satisfy the liabilities of the prime contractor or any subcontractor for any unpaid wages; monetary relief, including interest; and liquidated damages required by the clauses set forth in this section on this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract subject to the Contract Work Hours and Safety Standards Act that is held by the same prime contractor (as defined in § 5.2). The necessary funds may be withheld from the contractor under this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract that is subject to the Contract Work Hours and Safety Standards Act and is held by the same prime contractor, regardless of whether the other contract was awarded or assisted by the same agency, and such funds may be used to satisfy the contractor liability for which the funds were withheld.

b. *Priority to withheld funds.* The Department has priority to funds withheld or to be withheld in accordance with Section III paragraph 2.a. or paragraph 3.a. of this section, or both, over claims to those funds by:

(1) A contractor's surety(ies), including without limitation performance bond sureties and payment bond sureties;

(2) A contracting agency for its procurement costs;

(3) A trustee(s) (either a court-appointed trustee or a U.S. trustee, or both) in bankruptcy of a contractor, or a contractor's bankruptcy estate;

(4) A contractor's assignee(s);

(5) A contractor's successor(s); or

(6) A claim asserted under the Prompt Payment Act, [31 U.S.C. 3901](#)–3907.

4. Subcontracts. The contractor or subcontractor must insert in any subcontracts the clauses set forth in paragraphs 1. through 5. of this section and a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor is responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs 1. through 5. In the event of any violations of these clauses, the prime contractor and any subcontractor(s) responsible will be liable for any unpaid wages and monetary relief, including interest from the date of the underpayment or loss, due to any workers of lower-tier subcontractors, and associated liquidated damages and may be subject to debarment, as appropriate.

5. Anti-retaliation. It is unlawful for any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, or to cause any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, any worker or job applicant for:

a. Notifying any contractor of any conduct which the worker reasonably believes constitutes a violation of the Contract Work Hours and Safety Standards Act (CWHSSA) or its implementing regulations in this part;

b. Filing any complaint, initiating or causing to be initiated any proceeding, or otherwise asserting or seeking to assert on behalf of themselves or others any right or protection under CWHSSA or this part;

c. Cooperating in any investigation or other compliance action, or testifying in any proceeding under CWHSSA or this part; or

d. Informing any other person about their rights under CWHSSA or this part.

V. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System pursuant to 23 CFR 635.116.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of

the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term "perform work with its own organization" in paragraph 1. of this section refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions: (based on longstanding interpretation)

(1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;

(2) the prime contractor remains responsible for the quality of the work of the leased employees;

(3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and

(4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract. 23 CFR 635.102.

2. Pursuant to 23 CFR 635.116(a), the contract amount upon which the requirements set forth in paragraph 1. of this section is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. Pursuant to 23 CFR 635.116(c), the contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract. (based on longstanding interpretation of 23 CFR 635.116).

5. The 30-percent self-performance requirement of paragraph (1) is not applicable to design-build contracts; however,

contracting agencies may establish their own self-performance requirements. 23 CFR 635.116(d).

VI. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR Part 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract. 23 CFR 635.108.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR Part 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704). 29 CFR 1926.10.

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

VII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR Part 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the

character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 11, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

VIII. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT (42 U.S.C. 7606; 2 CFR 200.88; EO 11738)

This provision is applicable to all Federal-aid construction contracts in excess of \$150,000 and to all related subcontracts. 48 CFR 2.101; 2 CFR 200.327.

By submission of this bid/proposal or the execution of this contract or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, subcontractor, supplier, or vendor agrees to comply with all applicable standards, orders or regulations issued pursuant to the Clean Air Act (42 U.S.C. 7401-7671q) and the Federal Water Pollution Control Act, as amended (33 U.S.C. 1251-1387). Violations must be reported to the Federal Highway Administration and the Regional Office of the Environmental Protection Agency. 2 CFR Part 200, Appendix II.

The contractor agrees to include or cause to be included the requirements of this Section in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements. 2 CFR 200.327.

IX. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost \$25,000 or more – as defined in 2 CFR Parts 180 and 1200. 2 CFR 180.220 and 1200.220.

1. Instructions for Certification – First Tier Participants:

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this

covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction. 2 CFR 180.320.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default. 2 CFR 180.325.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances. 2 CFR 180.345 and 180.350.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180, Subpart I, 180.900-180.1020, and 1200. "First Tier Covered Transactions" refers to any covered transaction between a recipient or subrecipient of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a recipient or subrecipient of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction. 2 CFR 180.330.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold. 2 CFR 180.220 and 180.300.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. 2 CFR 180.300; 180.320, and 180.325. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. 2 CFR 180.335. To verify the eligibility of its principals, as well as the

eligibility of any lower tier prospective participants, each participant may, but is not required to, check the System for Award Management website (<https://www.sam.gov/>). 2 CFR 180.300, 180.320, and 180.325.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default. 2 CFR 180.325.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency, 2 CFR 180.335;

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State, or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property, 2 CFR 180.800;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification, 2 CFR 180.700 and 180.800; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default. 2 CFR 180.335(d).

(5) Are not a corporation that has been convicted of a felony violation under any Federal law within the two-year period preceding this proposal (USDOT Order 4200.6 implementing appropriations act requirements); and

(6) Are not a corporation with any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted, or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability (USDOT Order 4200.6 implementing appropriations act requirements).

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant should attach an explanation to this proposal. 2 CFR 180.335 and 180.340.

* * * * *

3. Instructions for Certification - Lower Tier Participants:

(Applicable to all subcontracts, purchase orders, and other lower tier transactions requiring prior FHWA approval or estimated to cost \$25,000 or more - 2 CFR Parts 180 and 1200). 2 CFR 180.220 and 1200.220.

a. By signing and submitting this proposal, the prospective lower tier participant is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances. 2 CFR 180.365.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180, Subpart I, 180.900 – 180.1020, and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. "First Tier Covered Transactions" refers to any covered transaction between a recipient or subrecipient of Federal funds and a participant (such as the prime or general contractor). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a recipient or subrecipient of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers to any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated. 2 CFR 1200.220 and 1200.332.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold. 2 CFR 180.220 and 1200.220.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered

transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the System for Award Management website (<https://www.sam.gov/>), which is compiled by the General Services Administration. 2 CFR 180.300, 180.320, 180.330, and 180.335.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment. 2 CFR 180.325.

* * * * *

4. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

a. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals:

(1) is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency, 2 CFR 180.355;

(2) is a corporation that has been convicted of a felony violation under any Federal law within the two-year period preceding this proposal (USDOT Order 4200.6 implementing appropriations act requirements); and

(3) is a corporation with any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted, or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability. (USDOT Order 4200.6 implementing appropriations act requirements)

b. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant should attach an explanation to this proposal.

* * * * *

X. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000. 49 CFR Part 20, App. A.

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

XI. USE OF UNITED STATES-FLAG VESSELS:

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, or any other covered transaction. 46 CFR Part 381.

This requirement applies to material or equipment that is acquired for a specific Federal-aid highway project. 46 CFR 381.7. It is not applicable to goods or materials that come into inventories independent of an FHWA funded-contract.

When oceanic shipments (or shipments across the Great Lakes) are necessary for materials or equipment acquired for a specific Federal-aid construction project, the bidder, proposer, contractor, subcontractor, or vendor agrees:

1. To utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the

extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels. 46 CFR 381.7.

2. To furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, 'on-board' commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph (b)(1) of this section to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Office of Cargo and Commercial Sealift (MAR-620), Maritime Administration, Washington, DC 20590. (MARAD requires copies of the ocean carrier's (master) bills of lading, certified onboard, dated, with rates and charges. These bills of lading may contain business sensitive information and therefore may be submitted directly to MARAD by the Ocean Transportation Intermediary on behalf of the contractor). 46 CFR 381.7.

**ATTACHMENT A - EMPLOYMENT AND MATERIALS
PREFERENCE FOR APPALACHIAN DEVELOPMENT
HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS
ROAD CONTRACTS** (40 U.S.C. sections 14501(d) and 14701
and the Appalachian Regional Commission Code as
authorized under 40 U.S.C. section 14302)

This provision is applicable to all Federal-aid projects funded
under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor
undertaking to do work which is, or reasonably may be, done
as on-site work, shall give preference to qualified persons who
regularly reside in the labor area as designated by the DOL
wherein the contract work is situated, or the subregion, or the
Appalachian counties of the State wherein the contract work is
situated, except:

a. To the extent that qualified persons regularly residing in
the area are not available.

b. For the reasonable needs of the contractor to employ
supervisory or specially experienced personnel necessary to
assure an efficient execution of the contract work.

c. For the obligation of the contractor to offer employment to
present or former employees as the result of a lawful collective
bargaining contract, provided that the number of nonresident
persons employed under this subparagraph (1c) shall not
exceed 20 percent of the total number of employees employed
by the contractor on the contract work, except as provided in
subparagraph (4) below.

2. The contractor shall place a job order with the State
Employment Service indicating (a) the classifications of the
laborers, mechanics and other employees required to perform
the contract work, (b) the number of employees required in
each classification, (c) the date on which the participant
estimates such employees will be required, and (d) any other
pertinent information required by the State Employment
Service to complete the job order form. The job order may be
placed with the State Employment Service in writing or by
telephone. If during the course of the contract work, the
information submitted by the contractor in the original job order
is substantially modified, the participant shall promptly notify
the State Employment Service.

3. The contractor shall give full consideration to all qualified
job applicants referred to him by the State Employment
Service. The contractor is not required to grant employment to
any job applicants who, in his opinion, are not qualified to
perform the classification of work required.

4. If, within one week following the placing of a job order by
the contractor with the State Employment Service, the State
Employment Service is unable to refer any qualified job
applicants to the contractor, or less than the number
requested, the State Employment Service will forward a
certificate to the contractor indicating the unavailability of
applicants. Such certificate shall be made a part of the
contractor's permanent project records. Upon receipt of this
certificate, the contractor may employ persons who do not
normally reside in the labor area to fill positions covered by the
certificate, notwithstanding the provisions of subparagraph (1c)
above.

5. The provisions of 40 U.S.C. 14501 allow the contracting
agency to provide a contractual preference for the use of
mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1
through 4 of this Attachment A in every subcontract for work
which is, or reasonably may be, done as on-site work.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SUPPLEMENTAL SPECIFICATION

EQUAL EMPLOYMENT OPPORTUNITY - NOTICE TO CONTRACTORS

Elsewhere in this contract are three Supplemental Specifications on Equal Employment Opportunity designated as PR-1273 Supplements. They are (1) Specific Equal Employment Opportunity Responsibilities (23 U.S.C. 140), (2) Equal Employment Opportunity - Goals and Timetables, and (3) Equal Employment Opportunity - Federal Standards. This notice is to clarify the responsibilities for review of compliance and enforcement for these separate supplemental specification requirements.

The first of the Supplemental Specifications cited above covers the requirements for the equal employment opportunity program under Title 23 for which the Arkansas Department of Transportation (ARDOT) is responsible. The ARDOT performs the necessary compliance review and enforcement of this Supplemental Specification which is applicable to all contractors holding Federal-aid highway contracts.

The latter two Supplemental Specifications are for the specific equal opportunity requirements for Executive Order 11246 which is the sole responsibility of the Office of Federal Contract Compliance Programs (OFCCP), Department of Labor. Review and enforcement under these Supplemental Specifications is performed by OFCCP.

OFCCP has, under Paragraph 8 of the EEO Federal Standards Supplemental Specification, recognized the Arkansas AGC Heavy Highway Affirmative Action Plan as meeting the provisions of that Supplemental Specification and Supplemental Specification (2) cited above. With this recognition, those contractors signatory to the AGC Plan have been waived from individual review by OFCCP. However, OFCCP retains the right to review any such contractors whenever circumstances warrant. Also, contractors non-signatory to the AGC Plan are subject to OFCCP review under EO 11246.

ARDOT and OFCCP have agreed to work towards eliminating duplicative reviews on individual contractors; however, each agency may make reviews at any time notwithstanding the cited agreement.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

SPECIFIC EQUAL EMPLOYMENT OPPORTUNITY RESPONSIBILITIES
(23 U.S.C. 140)**1. General.**

a. Equal employment opportunity requirements not to discriminate and to take affirmative action to assure equal employment opportunity as required by Executive Order 11246 and Executive Order 11375 are set forth in Required Contract Provisions (Form FHWA-1273 and Supplements) and these Special Provisions which are imposed pursuant to Section 140 of Title 23, U.S.C., as established by Section 22 of the Federal-Aid Highway Act of 1968. The requirements set forth in these Special Provisions shall constitute the specific affirmative action requirements for project activities under this contract and supplement the equal employment opportunity requirements set forth in the Required Contract Provisions. The initial measure of the contractor's good faith efforts to comply with these Special Provisions shall be its efforts to meet the goals set forth in the "Notice of Requirement for Affirmative Action to Ensure Equal Employment Opportunity (Executive Order 11246)" for minority and female participation expressed in percentage terms for the contractor's work force in each trade on this project.

b. The contractor will work with the Department and the Federal Government in carrying out equal employment opportunity obligations and in their review of his/her activities under the contract.

c. The contractor and all his/her subcontractors holding subcontracts not including material suppliers, of \$10,000 or more, will comply with the following minimum specific requirement activities of equal employment opportunity: (The equal employment opportunity requirements of Executive Order 11246, as set forth in Volume 6, Chapter 4, Section 1, Subsection 1 of the Federal-Aid Highway Program Manual, are applicable to material suppliers as well as contractors and subcontractors.) The contractor will include these requirements in every subcontract of \$10,000 or more with such modification of language as is necessary to make them binding on the subcontractor.

2. Equal Employment Opportunity Policy.

The contractor will accept as his operating policy the following statement which is designed to further the provision of equal employment opportunity to all persons without regard to their race, color, religion, sex, age, disability, or national origin, and to promote the full realization of equal employment opportunity through a positive continuing program:

It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment without regard to their race, color, religion, sex, age, disability, or national origin. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, preapprenticeship, and/or on-the-job training.

3. Equal Employment Opportunity Officer.

The contractor will designate and make known to the Department contracting officers an equal employment opportunity officer (hereinafter referred to as the EEO Officer) who will have the responsibility for and must be capable of effectively administering and promoting an active contractor program of equal employment opportunity and who must be assigned adequate authority and responsibility to do so.

4. Dissemination of Policy.

a. All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's equal employment opportunity policy and contractual responsibilities to provide equal employment opportunity in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

(1) Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's equal employment opportunity policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer or other knowledgeable company official.

(2) All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer or other knowledgeable company official covering all major aspects of the contractor's equal employment opportunity obligations within thirty days following their reporting for duty with the contractor.

(3) All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer or appropriate company official in the contractor's procedures for locating and hiring minority and female employees.

b. In order to make the contractor's equal employment opportunity policy known to all employees, prospective employees and potential sources of employees, i.e., schools, employment agencies, labor unions (where appropriate), college placement officers, etc., the contractor will take the following actions:

(1) Notices and posters setting forth the contractor's equal employment opportunity policy will be placed in areas readily accessible to employees, applicants for employment, and potential employees.

(2) The contractor's equal employment opportunity policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

5. Recruitment.

a. When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be published in newspapers or other publications having a large circulation among minority groups in the area from which the project work force would normally be derived.

b. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minority and female applicants, including, but not limited to, State employment agencies, schools, colleges, and minority group organizations. To meet this requirement, the contractor will, through his EEO Officer, identify sources of potential minority and female employees, and establish with such identified sources procedures whereby minority and female applicants may be referred to the contractor for employment consideration.

In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, he is expected to observe the provisions of that agreement to the extent that the system permits the contractor's compliance with equal employment opportunity contract provisions. (The U.S. Department of Labor has held that where implementation of such agreements has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Executive Order 11246, as amended.)

c. The contractor will encourage his present employees to refer minority and female applicants for employment by posting appropriate notices or bulletins in areas accessible to all such employees. In addition, information and procedures with regard to referring minority and female applicants will be discussed with employees.

6. Personnel Actions.

Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, age, disability, or national origin. The following procedures shall be followed:

a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with his obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of his avenues of appeal.

7. Training and Promotion.

a. The contractor will assist in locating, qualifying, and increasing the skills of minority group and women employees and applicants for employment.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship and on-the-job training programs for the geographical area of contract performance. Where feasible, 25 percent of apprentices or trainees in each occupation shall be in their first year of apprenticeship or training. In the event the Optional Training Special Provision is provided under this contract, this subparagraph will be superseded by that Special Provision.

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of minority group and women employees and will encourage eligible employees to apply for such training and promotion.

8. Unions.

If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use his/her best efforts to obtain the cooperation of such unions to increase opportunities for minority groups and women within the unions, and to effect referrals by such unions of minority and female employees. Actions by the contractor either directly or through a contractor's association acting as agent will include the procedures set forth below:

a. The contractor will use best efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minority group members and women for membership in the unions and increasing the skills of minority group employees and women so that they may qualify for higher paying employment.

b. The contractor will use best efforts to incorporate an equal employment opportunity clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, age, disability, or national origin.

c. The contractor is to obtain information as to the referral practices and policies of the labor union, except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the State Highway Department and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of minority and women referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, age, disability, or national origin, making full efforts to obtain qualified and/or qualifiable minority group persons and women. (The U.S. Department of Labor has held that it shall be no excuse that the union with which the contractor has a collective bargaining agreement providing for exclusive referral failed to refer minority employees.) In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the Department.

9. Subcontracting.

a. The contractor's attention is called to the Special Provision on Disadvantaged Business Enterprises in Federal-Aid Highway Construction.

b. The contractor will use his best efforts to ensure subcontractor compliance with their equal employment opportunity obligations.

10. Records and Reports.

a. The contractor will keep such records as are necessary to determine compliance with the contractor's equal employment opportunity obligations. The records kept by the contractor will be designed to indicate:

(1) the number of minority and non-minority group members and women employed in each work classification on the project,

(2) the progress and efforts being made in cooperation with unions to increase employment opportunities for minorities and women (applicable only to contractors who rely in whole or in part on unions as a source of their work force),

(3) the progress and efforts being made in locating, hiring, training, qualifying, and upgrading minority and female employees, and

(4) the progress and efforts being made in securing the services of Disadvantaged Business Enterprises or subcontractors or subcontractors with meaningful minority and female representation among their employees.

b. All such records must be retained for a period of three years following completion of the contract work and shall be available at reasonable times and places for inspection by authorized representatives of the Department and the Federal Highway Administration.

c. The contractors will submit an annual report to the State Highway agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form PR 1391.

11. Corrective Action Plans.

The contractor understands that a designated representative of the Department will periodically review compliance by the contractor with all contractual provisions incorporated pursuant to Executive Order 11246, as amended, and Federal Highway Administration Equal Employment Opportunity Special Provisions implementing the Federal-Aid Highway Act of 1968, where applicable.

In the event that the designated representative of the Department finds that the contractor has failed to comply with any of the aforementioned contractual provisions, he will notify the contractor of this finding in writing. A declaration of default will result in the suspension of all future payments. No declaration of default will be made if the Department and the contractor formally agree to enter into a corrective action plan setting out the specified steps and timetables the contractor will be contractually obligated to perform in order to re-establish his compliance. This corrective action plan, in order to be accepted by the Department, shall include the following mandatory enforcement language:

"If, at any time in the future, the Office of Federal Contract Compliance Programs or the Federal Highway Administration or the Arkansas State Highway Commission or their successor(s) believe that (name of contractor) has violated any portion of this agreement, (name of contractor) shall be promptly notified of the fact in writing. This notification shall include a statement of the facts and circumstances relied upon in forming that belief. In addition, the notification shall provide (name of contractor) with 15 days to respond in writing to the notification except where the Office of Federal Contract Compliance Programs, the Federal Highway Administration or the Arkansas State Highway Commission alleges that such delay would result in irreparable injury. It is understood that enforcement proceedings for violation of this agreement may be initiated at any time after the 15-day period has elapsed (or sooner if irreparable injury is alleged) without issuance of a show cause notice."

"It is recognized that where the Office of Federal Contract Compliance Programs and/or the Federal Highway Administration and/or the Arkansas State Highway Commission believes that (name of contractor) has breached this agreement, evidence regarding the entire scope of (name of contractor) alleged noncompliance from which this agreement resulted, in addition to evidence regarding (name of contractor) alleged violation of this agreement, may be introduced at the enforcement proceeding."

"Violation of this agreement may subject (name of contractor) to sanctions pursuant to the Arkansas State Highway Commission contract administration procedures. It is further recognized that liability for violation of this agreement may also subject (name of contractor) to sanctions set forth in Section 209 of Executive Order 11246, as amended, and/or appropriate relief."

The contractor will submit quarterly reports to the Department as a result of any deficiencies cited during an equal employment opportunity compliance review. The reports will indicate the affirmative action steps taken to correct the deficiencies. Instructions for submission of the reports will be furnished by the Equal Employment Opportunity Section.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SUPPLEMENTAL SPECIFICATION

EQUAL EMPLOYMENT OPPORTUNITY - GOALS AND TIMETABLES

NOTICE OF REQUIREMENT FOR AFFIRMATIVE
ACTION TO ENSURE EQUAL EMPLOYMENT
OPPORTUNITY (EXECUTIVE ORDER 11246)

1. The Bidder's attention is called to the "Equal Opportunity Clause" and the "Standard Federal Equal Employment Specifications" set forth herein.

2. The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate workforce in each trade on all construction work in the covered area, are as follows:

MINORITIESCOUNTY

Arkansas	16.4%	Lee	26.5%
Ashley	16.4%	Lincoln	16.4%
Baxter	3.3%	Little River	19.7%
Benton	3.3%	Logan	6.6%
Boone	3.3%	Lonoke	16.4%
Bradley	16.4%	Madison	3.3%
Calhoun	16.4%	Marion	3.3%
Carroll	3.3%	Miller	19.7%
Chicot	16.4%	Mississippi	26.5%
Clark	16.4%	Monroe	16.4%
Clay	26.5%	Montgomery	16.4%
Cleburne	16.4%	Nevada	20.2%
Cleveland	16.4%	Newton	3.3%
Columbia	20.2%	Ouachita	16.4%
Conway	16.4%	Perry	16.4%
Craighead	26.5%	Phillips	26.5%
Crawford	5.6%	Pike	20.2%
Crittenden	32.3%	Poinsett	26.5%
Cross	26.5%	Polk	6.6%
Dallas	16.4%	Pope	16.4%
Desha	16.4%	Prairie	16.4%
Drew	16.4%	Pulaski	15.7%
Faulkner	16.4%	Randolph	26.5%
Franklin	6.6%	Saline	15.7%
Fulton	16.4%	Scott	6.6%
Garland	16.4%	Searcy	3.3%
Grant	16.4%	Sebastian	5.6%
Greene	26.5%	Sevier	20.2%
Hempstead	20.2%	Sharp	16.4%
Hot Spring	16.4%	Stone	16.4%
Howard	20.2%	St. Francis	26.5%
Independence	16.4%	Union	16.4%
Izard	16.4%	Van Buren	16.4%
Jackson	16.4%	Washington	3.3%
Jefferson	31.2%	White	16.4%
Johnson	16.4%	Woodruff	16.4%
Lafayette	20.2%	Yell	16.4%
Lawrence	26.5%		

FEMALES

Statewide - 6.9%

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally assisted) performed in the covered area. If the Contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the Contractor also is subject to the goals for both its federally involved and nonfederally involved construction.

The Contractor's compliance with the Executive Order and the regulations in 41 CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3(a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the Contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the Executive Order and the regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

3. The Contractor shall provide written notification to the Director of the Office of Federal Contract Compliance Programs within 10 working days of award of any construction subcontract in excess of \$10,000 at any tier for construction work under the contract resulting from this solicitation. The notification shall list the name, address and telephone number of the subcontractor; employer identification number of the subcontractor; estimated dollar amount of the subcontract; estimated starting and completion dates of the subcontract; and the geographical area in which the subcontract is to be performed.

4. As used in this Notice, and in the contract resulting from this solicitation, the "covered area" is as described in the Proposal Form for this report.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SUPPLEMENTAL SPECIFICATION

EQUAL EMPLOYMENT OPPORTUNITY -FEDERAL STANDARDS

STANDARD FEDERAL EQUAL EMPLOYMENT OPPORTUNITY
CONSTRUCTION CONTRACT SPECIFICATIONS
(EXECUTIVE ORDER 11246)

1. As used in these specifications:

a. "Covered area" means the geographical area described in the solicitation from which this contract resulted;

b. "Director" means Director, Office of Federal Contract Compliance Programs, United States Department of Labor, or any person to whom the Director delegates authority;

c. "Employer identification number" means the Federal Social Security number used on the Employer's Quarterly Federal Tax Return, U.S. Treasury Department Form 941.

d. "Minority" includes:

- i. Black (all persons having origins in any of the Black African racial groups not of Hispanic origin);
- ii. Hispanic (all persons of Mexican, Puerto Rican, Cuban, Central or South American or other Spanish Culture or origin, regardless of race);
- iii. Asian and Pacific Islander (all persons having origins in any of the original peoples of the Far East, Southeast Asia, the Indian Subcontinent, or the Pacific Islands); and
- iv. American Indian or Alaskan Native (all persons having origins in any of the original peoples of North American and maintaining identifiable tribal affiliations through membership and participation or community identification).

2. Whenever the Contractor, or any Subcontractor at any tier, subcontracts a portion of the work involving any construction trade, it shall physically include in each subcontract in excess of \$10,000 the provisions of these specifications and the Notice which contains the applicable goals for minority and female participation and which is set forth in the solicitations from which this contract resulted.

3. If the Contractor is participating (pursuant to 41 CFR 60-4.5) in a Hometown Plan approved by the U.S. Department of Labor in the covered area either individually or through an association, its affirmative action obligations on all work in the Plan area (including goals and timetables) shall be in accordance with that Plan for those trades which have unions participating in the Plan. Contractors must be able to demonstrate their participation in and compliance with the provisions of any such Hometown Plan. Each Contractor or Subcontractor participating in an approved

Plan is individually required to comply with its obligations under the EEO clause, and to make a good faith effort to achieve each goal under the Plan in each trade in which it has employees. The overall good faith performance by other Contractors or Subcontractors toward a goal in an approved Plan does not excuse any covered Contractor's or Subcontractor's failure to take good faith efforts to achieve the Plan goals and timetables.

4. The Contractor shall implement the specific affirmative action standards provided in paragraphs 7a through p of these specifications. The goals set forth in the solicitation from which this contract resulted are expressed as percentages of the total hours of employment and training of minority and female utilization the Contractor should reasonably be able to achieve in each construction trade in which it has employees in the covered area. Covered construction contractors performing construction work in geographical areas where they do not have a Federal or federally assisted construction contract shall apply the minority and female goals established for the geographical area where the work is being performed. Goals are published periodically in the Federal Register in notice form, and such notices may be obtained from any Office of Federal Contract Compliance Programs office or from Federal procurement contracting officers. The Contractor is expected to make substantially uniform progress in meeting its goals in each craft during the period specified.

5. Neither the provisions of any collective bargaining agreement, nor the failure by a union with whom the Contractor has a collective bargaining agreement, to refer either minorities or women shall excuse the Contractor's obligations under these specifications, Executive Order 11246, or the regulations promulgated pursuant thereto.

6. In order for the nonworking training hours of apprentices and trainees to be counted in meeting the goals, such apprentices and trainees must be employed by the Contractor during the training period, and the Contractor must have made a commitment to employ the apprentices and trainees at the completion of their training, subject to the availability of employment opportunities. Trainees must be trained pursuant to training programs approved by the U.S. Department of Labor.

7. The Contractor shall take specific affirmative actions to ensure equal employment opportunity. The evaluation of the Contractor's compliance with these specifications shall be based upon its effort to achieve maximum results from its actions. The

Contractor shall document these efforts fully, and shall implement affirmative action steps at least as extensive as the following:

a. Ensure and maintain a working environment free of harassment, intimidation, and coercion at all sites, and in all facilities at which the Contractor's employees are assigned to work. The Contractor, where possible, will assign two or more women to each construction project. The Contractor shall specifically ensure that all foremen, superintendents, and other on-site supervisory personnel are aware of and carry out the Contractor's obligation to maintain such a working environment, with specific attention to minority or female individuals working at such sites or in such facilities.

b. Establish and maintain a current list of minority and female recruitment sources, provide written notification to minority and female recruitment sources and to community organizations when the Contractor or its unions have employment opportunities available, and maintain a record of the organizations' responses.

c. Maintain a current file of the names, addresses and telephone numbers of each minority and female off-the-street applicant and minority or female referral from a union, a recruitment source or community organization and of what action was taken with respect to each such individual. If such individual was sent to the union hiring hall for referral and was not referred back to the Contractor by the union or, if referred, not employed by the Contractor, this shall be documented in the file with the reason therefor, along with whatever additional actions the Contractor may have taken.

d. Provide immediate written notification to the Director when the union or unions with which the Contractor has a collective bargaining agreement has not referred to the Contractor a minority person or woman sent by the Contractor, or when the Contractor has other information that the union referral process has impeded the Contractor's efforts to meet its obligations.

e. Develop on-the-job training opportunities and/or participate in training programs for the area which expressly include minorities and women, including upgrading programs and apprenticeship and trainee programs relevant to the Contractor's employment needs, especially those programs funded or approved by the Department of Labor. The Contractor shall provide notice of these programs to the sources compiled under 7b above.

f. Disseminate the Contractor's EEO policy by providing notice of the policy to unions and training programs and requesting their cooperation in assisting the Contractor in meeting its EEO obligations; by including it in any policy manual and collective bargaining agreement; by publicizing it in the company newspaper, annual report, etc.; by specific review of the policy with all management personnel and with all minority and female employees before the start of work and then not less often than once every six months; and by posting the company EEO policy on bulletin boards accessible to all employees at each location where construction work is performed.

g. Review the company's EEO policy and affirmative action obligations under these specifications with all employees having any responsibility for hiring, assignment, layoff, termination or other employment decisions including specific review of these items with on-site supervisory personnel such as Superintendents, General Foreman, etc., prior to the initiation of construction work at any job site and then not less often than once every six months. A written record shall be made and maintained identifying the time and place of these meetings, persons attending, subject matter discussed, and disposition of the subject matter.

h. Disseminate the Contractor's EEO policy externally by including it in any advertising in the news media, specifically including minority and female news media, and providing written notification to and discussing the Contractor's EEO policy with other Contractors and Subcontractors with whom the Contractor does or anticipates doing business.

i. Direct its recruitment efforts, both oral and written, to minority, female and community organizations, to schools with minority and female students and to minority and female recruitment and training organizations serving the Contractor's recruitment area and employment needs. Not later than one month prior to the date for the acceptance of applications for apprenticeship or other training by any recruitment source, the Contractor shall send written notification to organizations such as the above describing the openings, screening procedures, and test to be used in the selection process.

j. Encourage present minority and female employees to recruit other minority persons and women and, where reasonable, provide after school, summer and vacation employment to minority and female youth both on the site and in other areas of a Contractor's workforce.

k. Validate all tests and other selection requirements where there is an obligation to do so under 41 CFR Part 60-3.

l. Conduct, at least annually, an inventory and evaluation at least of all minority and female personnel for promotional opportunities and encourage these employees to seek or to prepare for, through appropriate training, etc., such opportunities.

m. Ensure that seniority practices, job classifications, work assignments and other personnel practices, do not have a discriminatory effect by continually monitoring all personnel and employment related activities to ensure that the EEO policy and the Contractor's obligations under these specifications are being carried out.

n. Ensure that all facilities and company activities are non-segregated except that separate or single-user toilet and necessary changing facilities shall be provided to assure privacy between sexes.

o. Document and maintain a record of all solicitations of offers for subcontractors for disadvantaged business

enterprise construction contractors and suppliers, including circulation of solicitations to minority and female contractor associations and other business associations.

p. Conduct a review, at least annually, of all supervisors' adherence to and performance under the Contractor's EEO policies and affirmative action obligations.

8. Contractors are encouraged to participate in voluntary associations which assist in fulfilling one or more of their affirmative action obligations (7a through p). The efforts of a contractor association, joint contractor-union, contractor-community, or other similar group of which the contractor is a member and participant, may be asserted as fulfilling any one or more of its obligations under 7a through p of these Specifications provided that the contractor actively participates in the group, makes every effort to assure that the group has a positive impact on the employment of minorities and women in the industry, ensures that the concrete benefits of the program are reflected in the Contractor's minority and female workforce participation, makes a good faith effort to meet its individual goals and timetables, and can provide access to documentation which demonstrates the effectiveness of actions taken on behalf of the Contractor. The obligation to comply, however, is the Contractor's and failure of such a group to fulfill an obligation shall not be a defense for the Contractor's non-compliance.

9. A single goal for minorities and a separate single goal for women have been established. The Contractor, however, is required to provide equal employment opportunity and to take affirmative action for all minority groups, both male and female, and all women, both minority and non-minority. Consequently, the Contractor may be in violation of the Executive Order if a particular group is employed in a substantially disparate manner (for example, even though the Contractor has achieved its goals for women generally, the Contractor may be in violation of the Executive Order if a specific minority group of women is underutilized).

10. The Contractor shall not use the goals and timetables or affirmative action standards to discriminate against any person because of race, color, religion, sex, national origin, age or disability.

11. The Contractor shall not enter into any Subcontract with any person or firm debarred from Government contracts pursuant to Executive Order 11246.

12. The Contractor shall carry out such sanctions and penalties for violation of these specifications and of the Equal Employment Opportunity Clause, including suspension, termination and cancellation of existing subcontracts as may be imposed or ordered pursuant to Executive Order 11246, as amended, and its implementing regulations, by the Office of Federal Contract Compliance Programs. Any Contractor who fails to carry out such sanctions and penalties shall be in violation of these specifications and Executive Order 11246, as amended.

13. The Contractor, in fulfilling its obligations under these specifications, shall implement specific affirmative action steps, at least as extensive as those standards prescribed in paragraph 7 of

these specifications, so as to achieve maximum results from its efforts to ensure equal employment opportunity. If the Contractor fails to comply with the requirements of the Executive Order, the implementing regulations, or these specifications, the Director shall proceed in accordance with 41CFR60-4.8.

14. The Contractor shall designate a responsible official to monitor all employment related activity to ensure that the company EEO policy is being carried out, to submit reports relating to the provisions hereof as may be required by the Government and to keep records. Records shall at least include for each employee the name, address, telephone numbers, construction trade, union affiliation if any, employee identification number when assigned, social security number, race, sex, status (e.g., mechanic, apprentice, trainee, helper, or laborer), dates of changes in status, hours worked per week in the indicated trade, rate of pay, and locations at which the work was performed. Records shall be maintained in an easily understandable and retrievable form; however, to the degree that existing records satisfy this requirement, contractors shall not be required to maintain separate records.

15. Nothing herein provided shall be construed as a limitation upon the application of other laws which establish different standards of compliance or upon the application of requirements for the hiring of local or other area residents (e.g., those under the Public Works Employment Act of 1977 and the Community Development Block Grant Program).

16. In addition to the reporting requirements set forth elsewhere in this contract, the contractor and the subcontractors holding subcontracts not including material suppliers, of \$10,000 or more, shall submit for every month of July during which work is performed employment data as contained under Form PR-1391 (Appendix C to 23 CFR, Part 230), and in accordance with the instructions included thereon.

FHWA-1273 SUPPLEMENTAL SPECIFICATION

POSTERS AND NOTICES REQUIRED FOR FEDERAL-AID PROJECTS

POSTER OR DOCUMENT REQUIRED	REQUIRED BY	WHERE TO OBTAIN
-----------------------------	-------------	-----------------

1. Equal Employment Opportunity – Know Your Rights	U.S. Department of Labor (OFCCP)	ARDOT Resident Engineer
--	-------------------------------------	-------------------------

2. Company EEO Policy (prepared by the Contractor on the Company's letterhead)	U. S. Department of Labor (OFCCP)	Contractor to Prepare:
---	--------------------------------------	------------------------

- | |
|---|
| <ul style="list-style-type: none"> a. EEO policy statement. b. Notice encouraging employees to refer minority and female applicants for employment. c. Notice informing employees of an available training program and the entrance requirements. d. Complaint procedures. e. Notice identifying company EEO officer by name, including address and telephone number where EEO officer can be located. f. Work environment statement. g. Certification of nonsegregated facilities. *h. Notice to unions disseminating EEO commitments and responsibilities and requesting their cooperation. |
|---|

*Union Contractors Only

3. Current Wage Rates (PR-1273 Supplement) or SS Revisions of PR-1273 for Off-System Projects	U. S. Department of Labor	Contained in contract. Extra copies may be obtained from Program Management - ARDOT
---	---------------------------	--

7/26/96
Rev. 2/11/98
Rev. 2/20/03
Rev. 7/27/06
Rev. 10/24/06
Rev. 9/16/13
Rev. 8/22/17
Rev. 12/13/23

FHWA-1273 SUPPLEMENTAL SPECIFICATION
POSTERS AND NOTICES REQUIRED FOR FEDERAL-AID PROJECTS

POSTER OR DOCUMENT REQUIRED	REQUIRED BY	WHERE TO OBTAIN
4. "Employee Rights Under the Davis-Bacon Act" (WH 1321)	U. S. Department of Labor	ARDOT Resident Engineer
5. "Employee Rights Under the Davis-Bacon Act" (WH 1321 SPA)	U. S. Department of Labor	ARDOT Resident Engineer
6. Minimum Wage Rate (WH 1088)	U. S. Department of Labor	ARDOT Resident Engineer
7. "NOTICE" Federal Aid Projects (PR-1022)	U. S. Department of Transportation (FHWA)	ARDOT Resident Engineer
8. Job Safety and Health Protection OSHA 3165	U. S. Department of Labor (OSHA)	ARDOT Resident Engineer
9. Job Safety and Health Protection OSHA 3167 SPA	U. S. Department of Labor (OSHA)	ARDOT Resident Engineer
10. Emergency Phone Numbers of Doctors, Hospital and Ambulance near Job Site for referring injured employees.	U. S. Department of Labor (OSHA)	ARDOT Resident Engineer
11. WCC Form AR-P Workers Compensation Notice and Instructions to Employers and Employees	State of Arkansas	Insurance Carrier
Self-Insurer	State of Arkansas	Administrator - Self-Insured Group

7/26/96

Rev. 2/11/98

Rev. 2/20/03

Rev. 7/27/06

Rev. 10/24/06

Rev. 9/16/13

Rev. 8/22/17

Rev. 12/13/23

FHWA-1273 SUPPLEMENTAL SPECIFICATION

POSTERS AND NOTICES REQUIRED FOR FEDERAL-AID PROJECTS

POSTER OR DOCUMENT REQUIRED	REQUIRED BY	WHERE TO OBTAIN
12. Log and Summary of Occupational Injuries and Illnesses (OSHA Form 300) The Summary portion must be posted from February 1 to April 30, of the year following the year covered by the form.	U. S. Department of Labor (OSHA) Public Law 91-596	ARDOT Resident Engineer
13. Family and Medical Leave Act of 1993 (WH-1420) Employers who employ 50 or more employees for at least 20 workweeks in the current or preceding calendar year.	U. S. Department of Labor	ARDOT Resident Engineer
14. Employee Polygraph Protection Act (WH-1462)	U. S. Department of Labor	ARDOT Resident Engineer
15. Your Rights Under USERRA (The Uniformed Services Employment and Reemployment Rights Act)	U. S. Department of Labor	ARDOT Resident Engineer
16. Arkansas Department of Labor Notice to Employer & Employee	Arkansas Department of Labor	ARDOT Resident Engineer
17. Pay Transparency Nondiscrimination Provision	U. S. Department of Labor (OFCCP)	ARDOT Resident Engineer

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
WAGE RATE DETERMINATION

FHWA-1273 Supplemental
Page 1 of 4

"General Decision Number: AR20260154 05/18/2026

State: Arkansas

Construction Types: Highway

Counties: Arkansas Counties of
Arkansas, Ashley, Bradley and Desha

Modification Number	Publication Date
0	01/02/2026
1	05/18/2026

SUAR2014-026 07/21/2014

	Rates	Fringes
TRUCK DRIVER: SEMI/TRAILER TRUCK.....	\$ 10.75	0.00
TRUCK DRIVER: WATER TRUCK.....	\$ 19.00	0.00
TRUCK DRIVER: LOWBOY TRUCK.....	\$ 18.50	0.00
TRUCK DRIVER: FLATBED TRUCK.....	\$ 12.75	0.00
TRUCK DRIVER: DUMP TRUCK.....	\$ 16.73	0.00
TRAFFIC CONTROL: LABORER-CONES/ BARRICADES/BARRELS - SETTER/MOVER/SWEEPER.....	\$ 11.15	0.00
TRAFFIC CONTROL: FLAGGER.....	\$ 10.75	0.00
OPERATOR: SCREED.....	\$ 17.20	0.00
OPERATOR: SCRAPER.....	\$ 14.22	0.00
OPERATOR: ROLLER.....	\$ 14.96	0.00
OPERATOR: POST DRIVER (GUARDRAIL/FENCES).....	\$ 18.49	0.00
OPERATOR: PAVER (ASPHALT, AGGREGATE, AND CONCRETE).....	\$ 22.57	0.00
OPERATOR: OILER.....	\$ 16.99	0.00
OPERATOR: MILLING MACHINE.....	\$ 20.95	0.00
OPERATOR: MECHANIC.....	\$ 19.88	0.00
OPERATOR: LOADER.....	\$ 18.50	0.00
OPERATOR: GRADER/BLADE.....	\$ 17.98	0.00
OPERATOR: GRADE CHECKER.....	\$ 16.71	0.00
OPERATOR: CRANE.....	\$ 20.08	0.00
OPERATOR: BULLDOZER.....	\$ 16.90	0.00
OPERATOR: BROOM/SWEEPER.....	\$ 14.94	0.00
OPERATOR: BOBCAT/SKID STEER/SKID LOADER.....	\$ 21.60	0.00
OPERATOR: BACKHOE/EXCAVATOR/TRACKHOE.....	\$ 16.95	0.00
OPERATOR: ASPHALT PLANT.....	\$ 17.67	0.00
LABORER: MASON TENDER - CEMENT/CONCRETE.....	\$ 11.41	0.00
LABORER: COMMON OR GENERAL.....	\$ 11.43	0.00
LABORER: ASPHALT, INCLUDES RAKER, SHOVELER, SPREADER AND DISTRIBUTOR.....	\$ 13.42	0.00
IRONWORKER, STRUCTURAL.....	\$ 17.21	0.00
IRONWORKER, REINFORCING.....	\$ 15.31	0.00
HIGHWAY/PARKING LOT STRIPING: OPERATOR (STRIPING MACHINE).....	\$ 12.96	0.00
FORM WORKER.....	\$ 16.16	0.00

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
WAGE RATE DETERMINATION

FHWA-1273 Supplemental
Page 2 of 4

CEMENT MASON/CONCRETE FINISHER.....	\$ 16.60	0.00
CARPENTER, EXCLUDES FORM WORK.....	\$ 15.78	0.00

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

=====

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at <https://www.dol.gov/agencies/whd/government-contracts>.

Note: Executive Order 13658 generally applies to contracts subject to the Davis-Bacon Act that were awarded on or between January 1, 2015 and January 29, 2022, and that have not been renewed or extended on or after January 30, 2022. Executive Order 13658 does not apply to contracts subject only to the Davis-Bacon Related Acts regardless of when they were awarded. If a contract is subject to Executive Order 13658, the contractor must pay all covered workers at least \$13.65 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract from May 11, 2026, through December 31, 2026. The applicable Executive Order minimum wage rate will be adjusted annually. Additional information on contractor requirements and worker protections under Executive Order 13658 is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (iii)).

The body of each wage determination lists the classifications and wage rates that have been found to be prevailing for the type(s) of construction and geographic area covered by the wage determination. The classifications are listed in alphabetical order under rate identifiers indicating whether the particular rate is a union rate (current union negotiated rate), a survey rate, a weighted union average rate, a state adopted rate, or a supplemental classification rate.

Union Rate Identifiers

A four-letter identifier beginning with characters other than **US**, **UAVG**, **SA**, or **SC** denotes that a union rate was prevailing for that classification in the survey. Example:

PLUM0198-005 07/01/2024. PLUM is an identifier of the union whose collectively bargained rate prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2024 in the example, is the effective date of the most current negotiated rate.

Union prevailing wage rates are updated to reflect all changes over time that are reported to WHD in the rates in the collective bargaining agreement (CBA) governing the classification.

Union Average Rate Identifiers

The UAVG identifier indicates that no single rate prevailed for those classifications, but that 100% of the data reported for the classifications reflected union rates. EXAMPLE: UAVG-OH-0010 01/01/2024. UAVG indicates that the rate is a weighted union average rate. OH indicates the State of Ohio. The next number, 0010 in the example, is an internal number used in producing the wage determination. The date, 01/01/2024 in the example, indicates the date the wage determination was updated to reflect the most current union average rate.

A UAVG rate will be updated once a year, usually in January, to reflect a weighted average of the current rates in the collective bargaining agreements on which the rate is based.

Survey Rate Identifiers

The **◆SU◆** identifier indicates that either a single non-union rate prevailed (as defined in 29 CFR 1.2) for this classification in the survey or that the rate was derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As a weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SUFL2022-007 6/27/2024. SU indicates the rate is a single non-union prevailing rate or a weighted average of survey data for that classification. FL indicates the State of Florida. 2022 is the year of the survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 6/27/2024 in the example, indicates the survey completion date for the classifications and rates under that identifier.

◆SU◆ wage rates typically remain in effect until a new survey is conducted. However, the Wage and Hour Division (WHD) has the discretion to update such rates under 29 CFR 1.6(c)(1).

State Adopted Rate Identifiers

The **◆SA◆** identifier indicates that the classifications and prevailing wage rates set by a state (or local) government were adopted under 29 C.F.R 1.3(g)-(h). Example: SAME2023-007 01/03/2024. SA reflects that the rates are state adopted. ME refers to the State of Maine. 2023 is the year during which the state completed the survey on which the listed classifications

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
WAGE RATE DETERMINATION

FHWA-1273 Supplemental
Page 4 of 4

and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 01/03/2024 in the example, reflects the date on which the classifications and rates under the **SA** identifier took effect under state law in the state from which the rates were adopted.

WAGE DETERMINATION APPEALS PROCESS

1) Has there been an initial decision in the matter? This can be:

- a) a survey underlying a wage determination
- b) an existing published wage determination
- c) an initial WHD letter setting forth a position on a wage determination matter
- d) an initial conformance (additional classification and rate) determination

On survey related matters, initial contact, including requests for summaries of surveys, should be directed to the WHD Branch of Wage Surveys. Requests can be submitted via email to davisbaconinfo@dol.gov or by mail to:

Branch of Wage Surveys
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

Regarding any other wage determination matter such as conformance decisions, requests for initial decisions should be directed to the WHD Branch of Construction Wage Determinations. Requests can be submitted via email to BCWD-Office@dol.gov or by mail to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2) If an initial decision has been issued, then any interested party (those affected by the action) that disagrees with the decision can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Requests for review and reconsideration can be submitted via email to dba.reconsideration@dol.gov or by mail to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210.

=====
END OF GENERAL DECISION"

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB A20044

TRAINING PROGRAM

This Special Provision supersedes subparagraph 7b of the Special Provision entitled "Specific Equal Employment Opportunity Responsibilities" and implements 23 USC 140(a).

The contractors shall provide on-the-job training aimed at developing full journeymen in the type of trade or job classification involved.

The number of training slots to be trained under the special provision will be 1. A training slot will consist of 520 to 1040 hours.

As part of the contractor's equal employment opportunity/affirmative action program, training shall be provided as follows:

Training and upgrading of minorities, females and disadvantaged individuals toward journey level status is the primary objective of this Special Provision. A "disadvantaged individual" is an individual that meets the criteria established by the Department of Health and Human Services Poverty Guidelines. Training in classifications such as clerk-typist, secretary, bookkeeper, fire fighter, office engineer, estimator, timekeeper, laborer, or flag person **shall not** be approved for participation under this Special Provision.

The goals for minority and female participation established in accordance with 41 CFR 60-4 and listed elsewhere in this contract in the FHWA-1273 Supplement titled "Equal Employment Opportunity Goals and Timetables" subtitled "Notice of Requirement for Affirmative Action to Ensure Equal Opportunity (Executive Order 11246)" apply to all training performed by the contractor in the covered area.

In the event that the contractor subcontracts a portion of the contract work, the contractor may not further assign a portion of the training requirements established herein without the consent of the subcontractor(s). Any assignment of these training requirements by the contractor shall be submitted in writing to the Department and an appropriately amended commitment form shall be made applicable to such subcontract. Where feasible, 25 percent of apprentices or trainees in each occupation shall be in their first year of apprenticeship or training.

The contractor shall submit to the Department's Resident Engineer at the preconstruction conference a completed Training Commitment Form (TCF). Refer to Page four of four. The TCF should specify the training program, number of trainees, training classification, estimated starting date and training hours required per training classification to be used to fulfill the training requirement of this Special Provision. The Department must approve this form within 20 working days after the preconstruction conference. The contractor may enroll additional individuals in the training program based on approval of the Resident Engineer and there is sufficient time on the project or subsequent projects to complete the training.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB A20044

TRAINING PROGRAM

If the contractor fails to submit the TCF at the preconstruction conference, work will not be allowed to start on the project until the TCF is submitted to the Resident Engineer.

Only training programs approved by the Department with FHWA concurrence, the Department of Labor, its agencies, or by a State Apprenticeship Agency or Council recognized by the U.S. Department of Labor may be used to fulfill training requirements under this Special Provision.

The contractor, upon the start of training under the contract, shall provide the Resident Engineer the following information for each trainee:

Name

Address

Telephone Number

Social Security Number

Race/Ethnic Origin

Gender

Training Classification

Training Starting Date

Classification(s) previously trained and date training was completed (if applicable)

The contractor shall furnish to the Resident Engineer the number of training hours the trainee has accumulated each month. A Trainee Termination Form shall be completed when a trainee terminates from the training program. The Resident Engineer shall receive a copy.

The contractor, prior to the start of training, shall provide written notice to each individual to be trained under this Special Provision of that individual's designation as a trainee, the training program and classification under which training will be provided, the length of the training program, and the hourly wage rate to be paid to the trainee. Each month, while enrolled in the training program, the contractor shall inform the trainee of the number of hours accumulated in the training program. Upon graduation, each trainee shall be issued a permanent certification designating the bearer as a graduate journey person of the appropriate training program.

No employee shall be employed as a trainee in any classification in which the employee has successfully completed a training course leading to journey level status or in which the employee has been employed at the journey level. Individuals may be trained a maximum of three times as long as the training is for the purpose of upgrading that individual. If the trainee is enrolled more than once on this project, the trainee will only count as one in satisfying the number that is required to be enrolled in this contract. The contractor shall satisfy this requirement by including appropriate questions in the employee application or by other suitable means. The contractor's findings in each case shall be documented.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB A20044

TRAINING PROGRAM

Except as otherwise noted below, the contractor will be paid \$2.00 per hour of training provided to minorities, women and disadvantaged individuals on this contract under an approved training program. As approved by the Department, payment will be made to the contractor for training persons in excess of the number of hours specified herein. This payment may be made even though the contractor receives additional training program funds from other sources, provided such other source does not specifically prohibit the contractor from receiving other payment. Payment for off-site training may be made only if the approved training program being used by the contractor includes provisions for off-site training, the trainees are concurrently employed on a Federal-aid project, and the contractor contributes to the cost of the training, provides the instruction to the trainee, or pays the trainee's wage during the off-site training.

No payment will be made due to failure to provide the training required as stated in the approved training program and a good faith effort has not been made to retain the trainee upon completion of the training program, if work continues to be available in that classification. It is normally expected that a trainee will begin training on the project as soon as feasible after start of work utilizing the skill involved and remain on the project as long as training opportunities exist in the work classification or until the trainee has completed the training program. It is desired that all trainees be on board for the entire length of the contract. Responsibilities will have been fulfilled under this Special Provision if acceptable training has been provided on the basis of the total number enrolled on the contract for a significant period or the contractor has made a good faith effort to fulfill its obligations.

Trainees will be paid at least 60 percent of the appropriate minimum journey level rate specified in the contract or no less than the common laborer rate for the first half of the training period, 75 percent for the third quarter of the training period, and 90 percent for the last quarter of the training period, unless apprentices or trainees in an approved existing program are enrolled as trainees on this project. In that case, the appropriate rates approved by the Departments of Labor or Transportation in connection with the existing program shall apply to all trainees being trained for the same classification who are covered by this Special Provision.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB A20044

TRAINING PROGRAM

TRAINING COMMITMENT FORM

In accordance with this Training Special Provision, the undersigned bidder will provide training in the following crafts and in the amount of hours indicated below.

Training Program _____

<u>Number of Trainees</u>	<u>Training Classification</u>	<u>Estimated Starting Date</u>	<u>Minimum Number of Training Hours Required Per Trainee</u>
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____

Company Representative

Title

Date

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

CARGO PREFERENCE ACT REQUIREMENTS

The requirements of the Cargo Preference Act (CPA) and implementing regulations (46 CFR 381.7(a)-(b)) are applicable to this contract. For additional information, see the FHWA's web page:

<https://www.fhwa.dot.gov/construction/cqit/cargo.cfm>

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

**PROHIBITION OF CERTAIN TELECOMMUNICATIONS AND
VIDEO SURVEILLANCE SERVICES OR EQUIPMENT**

In accordance with the requirements of 2 CFR 200.216, equipment utilized on this project for telecommunications and video surveillance services or equipment shall not be produced by:

- 1) Huawei Technologies Company or ZTE Corporation (or any subsidiary or affiliate of such entities).
- 2) Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, or Dahua Technology Company (or any subsidiary or affiliate of such entities).

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

BUY AMERICA - CONSTRUCTION MATERIALS

Description: **Section 106, Control of Material**, of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The following is added as **Subsection 106.01(c) Construction Materials**

Buy America – Construction Materials. (1) General. The Bipartisan Infrastructure Law (BIL) was enacted on November 15, 2021 (BIL Build America, Buy America Act Publication L. No. 117-58). This provision expands the Buy America requirements beyond what was only required for steel and iron products. The steel and iron provisions have not changed with the new law. Buy America requirements are in effect only on Federal-Aid contracts and all construction materials shall be produced/manufactured in the United States. Items specifically excluded from this requirement are cement and cementitious materials; aggregates such as stone, sand, or gravel; aggregate binding agents or additives (including asphalt binders). All other materials permanently incorporated into the project will be subject to Buy America requirements.

(2) Definitions. A construction material includes an article, material, or supply that is or consists primarily of:

- non-ferrous metals;
- plastic and polymer-based products (including polyvinylchloride, composite building materials, and polymers used in fiber optic cable);
- glass (including optic glass);
- lumber; or
- drywall.

All construction materials shall be produced in the United States. This means all manufacturing processes to produce the construction materials shall occur in the United States. All manufacturing processes for construction materials shall mean the final manufacturing process and the immediately preceding manufacturing stage for the construction material.

All manufactured products permanently incorporated into the project must be manufactured in the United States or assembled from components that are mined, produced, or manufactured in the United States. The combined value of the domestic components of a manufactured product must be greater than 55 percent of the total cost of all components of the manufactured product.

(3) Compliance. All prospective bidders should obtain quotes from suppliers that can furnish the required domestic manufactured materials and the cost of such should be included in the contract unit prices bid for the various individual pay items. Waivers will only be considered when there is no domestic manufacturer of the specific item meeting the requirements in the appropriate section of the Standard Specifications. Questions relating to domestic product availability should be made pre-bid and responses, including possible waivers, will be posted on the Department's website.

The Contractor shall ensure that all manufacturing processes for each covered product comply with this Buy America Provision. Non-conforming products shall be replaced at no expense to the Department. It is the contractor's responsibility to assure all submittals required

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

BUY AMERICA - CONSTRUCTION MATERIALS

for Buy America are submitted to the Engineer prior to the products and or materials being incorporated into the project.

Buy America requirements do not apply to temporary elements not permanently incorporated into a project. This includes falsework, temporary sheet piling, detour bridges, temporary elements left in place at the contractor's convenience, unless the contract plans and specifications require steel or iron components or imply that the item be left in place, or items that are simply moved from one place to another within the same project. Buy America only applies to construction materials that are consumed in, incorporated into, or affixed to an infrastructure project. As such, it does not apply to tools, equipment, and supplies, such as temporary scaffolding, removed at or before completion of the project.

(4) Certification. The contractor shall provide a certification from the supplier for each construction material, stating that it meets the provisions of this specification or the Build America/Buy America act, prior to incorporating any construction material into the project. The supplier certifying may be the original manufacturer, fabricator, or vendor provided the supplier has sufficient control and knowledge of the manufacturing process to accept responsibility and certify full and complete conformance with the certification. In lieu of the manufacturer's certification, the Contractor or supplier may provide the Domestic Materials Self-Certification Form for the specific product from AASHTO's Product Evaluation & Audit Solution's datamine (www.transportation.org/product-evaluation-and-audit-solutions) or from the NEMA Make it American BABA Registry (<https://www.makeitelectric.org/nema-programs/make-it-american/nema-make-it-american/>).

(5) Examples of Pay Items Affected. The following are items from the Standard Specifications and common special provisions that must meet the requirements of this specification. This list is provided for bidders' information and is not to be considered as all-inclusive as other items covered by the standard specifications, supplemental specifications, and special provisions may also fall under these requirements:

Non-Ferrous Metals	
Item	Specification Section
Aluminum Pipe Culverts	606
Aluminum Chain Link Fence	619
Aluminum Gates	619
Mailboxes	637
Electrical Conductors	700, 708
Controller Cabinet (cabinet assembly)	701, 702, 703
Ground Rods	701, 712, 714, 715
System Local Controller/Actuated Controller components (surge protector, conflict monitor, switches, flashers, relays, wiring harness, clocks, etc.)	701. Job SP
Pre-Timed Controller (cabinet and internal equipment)	702
Flashing Beacon Controller (cabinet and all internal equipment)	703

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

BUY AMERICA - CONSTRUCTION MATERIALS

Loop Wiring	704
Vehicle Detectors (including all electrical components and mounting racks)	704
Feeder Wire	704
Preformed Detector Loops	704
Loop Wiring in Duct	705
Traffic Signal Heads (all types)	706, Job SP
Pedestrian Signal Heads	707
Traffic Signal Cable	708
Sign Supports - all types (including clips and fasteners)	724, 730
Sign Panels (including clips and fasteners)	723, 725, 726, 727, 728
Video Detectors (detector, processor, and other equipment)	733
Video Cable	733
Metal Bridge Railing	806
Bronze or Copper Alloy Bearing and Expansions Plates	807
Bridge Name Plates	812
Accessible Pedestrian Signals (APS)	Job SP
Electrical Conductors for Luminaires	Job SP
Electrical Conductors-in-Conduit	Job SP
LED Roadway Illumination Poles	Job SP
Luminaires	Job SP
Pedestal Type Service Point Assembly	Job SP
Retroreflective Backplates	Job SP
Wrong Way Detection System Controller Cabinet	Job SP
Copper plumbing lines and fittings	Job SP

Plastic/Polymer Based Products	
Item	Specification Section
Joint Sealers (Types 3 and 4)	501,503, 504,507,509
Epoxy Coating for Dowel Bars and Reinforcing Steel	501, 502, 507, 804
Epoxy Resin Anchoring Systems (Dowel Bars, Hand Rails, Metal Bridge Railing, Anchor Bolts)	507, 633, 806, 807
Polyethylene Pipe Culverts	606
PVC Pipe Culverts	606
RC Pipe Culvert Gaskets	606
Drop Inlet Steps	609, 610, 640
ABS or Polyethylene Pipe for Underdrains	611
PVC Pipe for Underdrain Laterals	611

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

BUY AMERICA - CONSTRUCTION MATERIALS

Filter Fabrics	611, 625, 629, 816
Geotextile Fabrics	625
Tactile Panels for Wheelchair Ramps	641, Job SP
System Local Controller/Actuated Controller components (surge protector, conflict monitor, switches, flashers, relays, wiring harness, clocks, etc.)	701, Job SP
Pre-Timed Controller (internal equipment)	702
Flashing Beacon Controller (all internal equipment)	703
Vehicle Detectors (all electrical components)	704
Traffic Signal Heads (all types)	706, Job SP
Pedestrian Signal Heads	707
Non-Metallic Conduit (PE & PVC)	710
Paint for Reflectorized Paint Pavement Markings	718
Thermoplastic Pavement Markings (all)	719
Permanent Pavement Marking Tape	720
Raised Pavement Markers (markers and epoxy adhesive)	721
Sand Barrels/Lids for Impact Attenuation Barriers	731
Video Detectors (detector, processor, and other equipment)	733
Paint Systems for Structural Steel	807, 820
Preformed Joint Seals	809
Silicone Joint Sealants	809
Accessible Pedestrian Signal (APS) components	Job SP
Cellular Modem	Job SP
Enhanced Thermoplastic Pavement Markings	Job SP
Ethernet Switch (all types)	Job SP
Geogrids (all types)	Job SP
Hybrid Video/Radar Detection System components	Job SP
Latex Modifier in Latex Modified Concrete Overlays	Job SP
Lightweight Panels for Sound Reflecting Noise Barriers	Job SP
Overhead Digital Message Sign Assembly	Job SP
Polymer Resin in Polymer Overlays	Job SP
Polypropylene Pipe Culverts	Job SP
PTZ Camera System	Job SP
Radar Detection System	Job SP
Wrong Way Detection System FLIR Thermal Sensor	Job SP
Wrong Way Detection System Solar Panel	Job SP
PVC piping and fittings for building projects	Job SP

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

BUY AMERICA - CONSTRUCTION MATERIALS

Glass	
Item	Specification Section
Glass Beads (drop on application)	718, 719
Fiber Optic Cable	Job SP
Solar Panels (Wrong Way Detection Systems and other ITS systems)	Job SP
Windows in Building Construction	Job SP

Lumber	
Item	Specification Section
Wood Guard Rail Posts	617, 639
Wood Block Outs for Guardrail	617,639
Wood Posts for Guard Cable	618
Fence Posts and Braces (Type A, B, C and D)	619
Mailbox Supports	637
Treated Wood Poles	716
Treated Lumber	817
Treated Bridge Timbers	817
Timber Piling	818
Framing Lumber, Plywood, Trim Lumber in Building Construction	Job SP

Drywall	
Item	Specification Section
Drywall in Building Construction	Job SP

ARKANSAS DEPARTMENT OF TRANSPORTATION**SPECIAL PROVISION****JOB NO. A20044****VENDOR REGISTRATION REQUIREMENT**

To ensure proper information is on file for all contractors on ARDOT construction projects, prime contractors and subcontractors shall submit vendor registration information using the ARDOT Vendor Registration Form.

The ARDOT Vendor Registration Form is a Microsoft Form developed to allow the Department to collect vendor information electronically and transmit that information into the Department's construction management system (CMS).

The form may be used both for initial registration and for submission of updated vendor information when changes are needed, such as updated contact information.

Contractors may complete the ARDOT Vendor Registration Form at any time to be included in the construction management system as a Vendor. The form allows contractors to indicate if they wish to be considered for Prequalification or for DBE Certification. The form will not complete the Prequalification or DBE Certification process but will instead initiate the process with the proper Divisions in ARDOT. All bidders must submit this form prior to bidding on any Proposal to ensure ARDOT data is correct and complete. Any contractors who will be added as Subcontractors on the Contract shall complete the ARDOT Vendor Registration Form prior to submitting the actual subcontract.

Vendors shall ensure that all information submitted through the ARDOT Vendor Registration Form is complete and accurate. The Department may require correction or resubmission of incomplete or inaccurate information before the registration is considered acceptable.

No direct payment will be made for furnishing and submitting vendor registration information. All costs associated with complying with this Special Provision shall be considered incidental to the contract.

The ARDOT Vendor Registration Form is available at the following link:

<https://forms.office.com/Pages/ResponsePage.aspx?id=k42YmO7x6EGK6v9zsAW4fbNdDoviCDRLsOknaQRB5A9UME5XOVc0T1pKMU84VFQwMUY5Nk5NQTY0MCQIQCN0PWcu>

ARKANSAS DEPARTMENT OF TRANSPORTATION**SPECIAL PROVISION****JOB NO. A20044****DOCUMENTATION OF PAYMENTS MADE – PROMPT PAYMENT (SIGNET)**

In accordance with Section 108.01 of the Standard Specifications, the Contractor shall pay all subcontractors their respective subcontract amount within 10 calendar days after the Contractor receives payment from the Department. Payment is defined as issuing an Electronic Funds Transfer (EFT) or mailing a check to a subcontractor. The 10-day requirement is met on the date that payment is issued to the subcontractor.

First-tier subcontractors have the same obligation to any second-tier subcontractors. Subcontractors must pay their second-tier subcontractors within 10 days of receipt of payment from the Prime Contractor.

ARDOT monitors payments made by prime contractors to both DBE and non-DBE subcontractors to ensure compliance with prompt payment requirements. Prime contractors are required to report payments made to all subcontractors, and subcontractors must report payments made to any lower-tier subcontractors. Subcontractors are required to confirm receipt of payment.

The tracking of subcontractor prompt payment is conducted using the Signet™ application. Signet™ is a third-party service, supported by the software vendor, which is used by both Prime and Subcontractors. Signet™ is a reporting tool only and does not process financial transactions. ARDOT does not provide direct technical support for Signet™. Information about Signet™ may be found at <https://signet-help.zendesk.com> and by clicking the Signet™ tab.

Signet™ shall be required for use on this construction contract.

Upon completion of the first payment estimate on the contract Signet™ will automatically notify the Contractor via email prompting registration in Signet™ for that contract. The Prime Contractor will be required to pay a one-time, fixed fee of \$1,100 for this contract. Payment will be made to the Signet™ vendor. This will activate use of Signet™ for the Prime and all Subcontractors for the duration of that contract, regardless of contract value, number of subcontractors, contract duration, or number of payments reported. Subcontractors will not be charged any fee to register for contracts.

After each estimate, the Prime Contractor will report remitted payment to subcontractors in Signet™. This will trigger notification to each subcontractor via email requesting verification of the reported payment. The subcontractor will be given the opportunity to register with Signet™ at that time (for no cost).

The Prime or Subcontractor reporting payment must report the following information in Signet™:

- The name of the subcontractor or second-tier subcontractor receiving payment.
- The dollar amount of the payment made to the subcontractor or second-tier subcontractor.
- The date the payment was made to the subcontractor or second-tier subcontractor.
- Any retainage, which is only permitted if it was included in the individual subcontract when it was submitted to the Department for acknowledgement.
- The DBE Function performed for this payment (if the subcontractor/second-tier subcontractor is a DBE).
- Other information required by Signet™.

ARKANSAS DEPARTMENT OF TRANSPORTATION**SPECIAL PROVISION****JOB NO. A20044****DOCUMENTATION OF PAYMENTS MADE – PROMPT PAYMENT (SIGNET)**

The contractor must report the return of retainage or other withholdings in separate, standalone payment entries (separate from routine, planned progress payment estimates).

In the event that no subcontract work is included in a payment estimate, such that no payment is due to any subcontractors, the Prime Contractor shall mark the payment complete within Signet™, and no other payments are required to be reported for that estimate.

Subcontractors must verify in the Signet™ application each payment reported by a payer within 10 days of the payment being reported by the payer. This verification includes whether the payment was received and, if so, whether it was as expected.

Basis of Payment. The cost of registration for the Signet™ application will be reimbursed by the Department using a line item in the contract. The reimbursement will be set to match the current cost of the registration fee for Signet™ and will not be bid by the contractor. All costs for usage, time, labor, or other costs for reporting payments to subcontractors through the Signet™ application will be considered incidental and no direct payment will be made for these.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

BIDDING REQUIREMENTS AND CONDITIONS

Section 102 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The fourth sentence of the second paragraph of **Subsection 102.01** is hereby deleted, and the following substituted therefore:

Prospective bidders may file a questionnaire at any time; however, prospective bidders will not be given authorization to submit a proposal unless a rating has been extended based on an acceptable questionnaire.

The following paragraph has been added to **Subsection 102.01**.

A contractor with common officers/owners/partners of any firm, partnerships, joint ventures, or corporations that is seeking prequalification, has been prequalified, or has entered into a previous or current contract with the Commission may have the prequalification denied, limited, or revoked for the reasons listed in Subsection 102.04(a)-(m).

The last paragraph of **Subsection 102.01** is hereby deleted.

The second sentence of **Subsection 102.02** is hereby deleted, and the following substituted therefore:

The Notice to Contractors will contain a description of the proposed work, and information regarding access to proposal documents, plans, specifications, and the amount and nature of the proposal guaranty.

Subsection 102.03 is hereby deleted, renamed **Contents of Proposal Documents**, and the following substituted therefore:

The proposal documents will state the location and description of the contemplated construction and will show the estimate of the various quantities and kinds of work to be performed or materials to be furnished, and will have a schedule of items. The proposal documents will state the time in which the work must be completed, the amount of the proposal guaranty, and the date and time of the letting of work. The documents will also include any special provisions or requirements that vary from or are not contained in the standard specifications.

All forms included in the proposal documents are considered a part thereof. The plans, specifications, and other documents designated in the proposal documents will be considered a part of the proposal whether included or not.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

BIDDING REQUIREMENTS AND CONDITIONS

The first through fourth paragraphs of **Subsection 102.04** are hereby deleted, and the following substituted therefore:

To become an eligible bidder, prospective bidders must be registered to bid in Arkansas with Bid Express. Prospective bidders must also contact the Program Management Division at (501) 569-2261 during regular business hours between the date the project is advertised and 4:30 p.m. on the day prior to the scheduled bid opening to request to become eligible to bid specific projects. Only prequalified contractors or their authorized representative may request to become an eligible bidder.

If the prospective bidder's prequalification rating is not "unlimited", the bidder shall file a certification with the Department citing all contracts in force and the unfinished value of such work. A prospective bidder will not be allowed to submit a proposal until a certification for the current bidding period is on file and the amount of work the contractor may be allowed to undertake is determined. The contractor's prequalification rating, less the unfinished value of all contracts in force, will determine the amount of additional work that the contractor may be allowed to undertake. A contractor will not be allowed to submit a proposal on an individual project for which the estimated cost is more than the amount that the contractor may be allowed to undertake, but the contractor will be allowed to submit a proposal on more than one project, providing that the estimated cost of each project is not more than the amount that the contractor may be allowed to undertake. In the event a contractor submits a low bid on more than one project and the aggregate amount is greater than the amount the contractor may be allowed to undertake, the Commission will exercise its discretion in the award of a particular project or projects.

A charge will be assessed for authorization to submit a proposal, paper copies of the proposal documents, and plans issued. These services are provided during regular business hours until 4:30 p.m. on the day prior to the scheduled bid opening at the Arkansas Department of Transportation, 10324 Interstate 30, Little Rock, Arkansas 72209, (501) 569-2261. Payment shall be made at the time services are provided or upon receipt of statement therefore. No refund will be allowed for bids not submitted or for plans or proposal documents returned.

The second sentence of the first paragraph of **Subsection 102.06** is hereby deleted, and the following substituted therefore:

The bidder is expected to examine carefully the site of the proposed work, the proposal documents, plans, specifications, supplemental specifications, and special provisions before submitting a proposal.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

BIDDING REQUIREMENTS AND CONDITIONS

The first paragraph of **Subsection 102.07** is hereby deleted, and the following substituted therefore:

The proposal shall only be submitted through the internet bidding service, Bid Express. The bidder shall specify a unit price in figures for each pay item for which a quantity is given. A unit price of "zero" (\$0.00) is a valid price and will be considered. A blank unit price is not considered valid. The unit bid price should not be carried beyond 1 cent (\$0.01). Any figures on the unit bid price beyond 1 cent will be dropped.

The second and third paragraphs of **Subsection 102.07** are hereby deleted.

The fifth paragraph of **Subsection 102.07** is hereby deleted, and the following substituted therefore:

The bidder's proposal must be submitted with a digital signature containing the name of the individual, one or more members of the partnership, one or more members or officers of each firm representing a joint venture, or one or more officers of a corporation, or by an agent of the Contractor legally qualified and acceptable to the Department.

The sixth paragraph of **Subsection 102.07** is hereby deleted, and the following substituted therefore:

If the proposal is submitted with a digital signature of any person who is not listed in the bidder's Prequalification Questionnaire (Questionnaire Form) as the individual, as a partner of a partnership, or as an officer of a corporation, authorization for such submittal should be on file with the Department prior to the download of bids. This authorization shall be made before the downloading of bids and be in the form of a Power of Attorney duly executed and signed by an official with power to constitute such authority.

The last sentence of the seventh paragraph of **Subsection 102.07** is hereby deleted, and the following substituted therefore:

Those items of Asphalt Binder that are subject to a minimum bid price will bear the note "(Minimum bid price is \$120.00 per ton)" within the Schedule of Items of the proposal documents.

The first sentence of the ninth paragraph of **Subsection 102.07** is hereby deleted, and the following substituted therefore:

The proposal documents for all federal aid projects will contain a bidders list.

The last sentence of the ninth paragraph of **Subsection 102.07** is hereby deleted, and the following substituted therefore:

The information provided will not be used for contract awarding purposes but must be provided before the Contractor will be given authorization to submit proposals for future lettings.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

BIDDING REQUIREMENTS AND CONDITIONS

Subsection 102.08 Irregular Proposals is hereby deleted, and the following substituted therefore:

- (a) Proposals will be considered irregular and will be rejected for the following reasons:
 - (1) If the proposal does not contain a unit price for each pay item listed except in the case of authorized alternate pay items.
 - (2) If the proposal is not digitally signed by an authorized representative of the firm.
 - (3) If the proposal is not accompanied by the proper proposal guaranty.
 - (4) If a proposal is received from an individual, firm, partnership, or corporation with an interest, as principal, in another proposal for the same project.
 - (5) If the proposal is not accompanied by the Certification to Submit DBE Participation.
- (b) Proposals will be considered irregular and may be rejected for the following reasons:
 - (1) If the proposal is not accompanied by a bid schedule and bid schedule narrative as required in the proposal documents.
 - (2) Unbalanced proposals in which the prices for some items are out of proportion to the reasonable costs representative of those items.
 - (3) If there are irregularities of any kind that may tend to make the proposal incomplete, indefinite, or ambiguous as to its meaning.

The first sentence of **Subsection 102.09** is hereby deleted and the following substituted therefore:

No proposal will be considered by the Commission unless a guaranty in the form of a bank draft, certified check, or cashier's check drawn on a solvent bank or trust company, or a bidder's paper bond executed by an approved surety company has been received by the Program Management Division prior to the download of bids.

The following paragraph is hereby added after the first paragraph of **Subsection 102.09**:

Electronic bid bonds are allowed. The prospective bidder should verify their bid bond in their proposal prior to submission.

Subsection 102.10 is hereby deleted and the following substituted therefore:

The proposal shall only be submitted through the internet bidding service, Bid Express.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

BIDDING REQUIREMENTS AND CONDITIONS

Subsection 102.11 is hereby deleted, and the following substituted therefore:

A bidder may withdraw or modify a proposal after it has been submitted to Bid Express, up to the time set for the deadline for proposals to be received. A proposal may also be withdrawn if the Commission fails to make an award within 40 calendar days after the date of downloading.

Subsection 102.12 is hereby deleted, renamed **Downloading of Proposals**, and the following substituted therefore:

Proposals will be downloaded and then posted on the Department's website at the time and place indicated in the Notice to Contractors.

The last sentence of **Subsection 102.15** is hereby deleted, and the following substituted therefore:

In any case, the prospective bidders will be contacted prior to the download of bids.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

MANDATORY ELECTRONIC CONTRACT

Paper Contract Documents and Forms will not be accepted.

The Department will only accept and execute an electronic contract for this project through Doc Express, a paperless contracting system. Prospective bidders will need to contact Doc Express to set up an account prior to the bid opening date. The toll-free phone number for Doc Express is 1-888-352-2439 and their website address is www.docexpress.com.

Section 103 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows.

The first sentence of **Subsection 103.06(a)** is hereby deleted, and the following substituted therefore:

The Contract shall be electronically signed by the successful bidder and electronically submitted to the Program Management Division, Construction Contract Procurement Section, together with the required bonds and proof of liability insurance, within 10 business days after the notice of award has been issued.

Subsection 103.08(d)(3)d. is hereby deleted, and the following substituted therefore:

Documentation of the bidder's commitment to use a DBE subcontractor whose participation it submits to meet a contract goal; and

Subsection 103.08(d)(3)e. is hereby deleted, and the following substituted therefore:

Document confirmation from the DBE that it is participating in the contract as provided in the Contractor's commitment.

Subsection 103.08(d)(5) is hereby deleted, and the following substituted therefore:

The preceding information shall be submitted directly to the Arkansas Department of Transportation, Program Management Division, via Doc Express.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

MANDATORY ELECTRONIC DOCUMENT SUBMITTAL

Paper Document Submittals will not be accepted.

The Department will only accept electronically-submitted documents for consideration on this project. All correspondence and submittals to the Department shall be submitted through Doc Express, a paperless contracting system. When signed originals are required, the original shall be the document uploaded to Doc Express and the signature shall be the electronic signature applied through Doc Express. The Contractor shall use the same organizational account for project documentation as used to fulfill the requirements of the Mandatory Electronic Contract Special Provision. The toll-free phone number for Doc Express is 1-888-352-2439 and their website address is www.docexpress.com.

Any reference in the Standard Specifications to document submittal in writing or by U.S. Mail, facsimile, or in person is hereby amended to require that such documents be submitted using Doc Express with the following exceptions:

- Material delivery tickets which are used for payment or for field verification shall be submitted on paper as required by the Standard Specifications for Highway Construction, Edition of 2014.
- Any document with specific submittal requirements in state and/or federal law or federal regulations that conflict with the requirements of this Special Provision shall be submitted in accordance with such state and/or federal law or federal regulations.

A user guide is available on the Department's web page to assist Contractors with the use of Doc Express. The "Contractor Guide to Using Doc Express" is available on the Department's web page at <https://ardot.gov/divisions/construction/doc-express/>.

The Contractor may provide access for subcontractors to view and submit items in Doc Express by following the instructions provided in the "Contractor Guide to Using Doc Express". Once an organizational account is activated and the Contractor provides access to the contract, a subcontractor may submit documents to the Contractor in Doc Express by uploading the electronic documents as directed in the User Guide. Any documents uploaded by the subcontractor must be then retrieved and published by the Contractor within Doc Express for further action by the Engineer. The Engineer will not review or take any actions on any documents submitted by the subcontractor until the document has been appropriately submitted by the Contractor.

Any submittals, documents, subcontracts, proposals, working drawings, or any other items submitted by the Contractor within Doc Express are not considered approved by the Engineer until written notification of the approval is published by the Engineer in the "CON-Correspondence-From Department to Contractor" drawer in Doc Express. Any action taken by the Contractor prior to this notification is taken at the Contractor's own risk.

The Department's System Administration team has no authority to take action on any documents submitted to the system. Access for this team is for management of the application only. Knowledge of any document submitted is not imputed to the Department by the knowledge of Systems Administration.

The requirements of this Special Provision shall supersede the requirements of all other Special Provisions unless such Special Provision includes a stated exception to this Special Provision.

ARKANSAS DEPARTMENT OF TRANSPORTATION**SPECIAL PROVISION****JOB NO. A20044****LIQUIDATED DAMAGES PROCEDURE FOR BID LETTINGS**

Department Standard Specification **Section 102.04 and Supplemental Specification 102-2** state that the Department reserves the right to refuse to issue, accept, or consider a proposal:

“If the prospective bidder is the Contractor on a current Contract with the Commission on which Liquidated Damages are being assessed, and there are no pending time extensions warranted to remove the project from Liquidated Damages.”

If the prospective bidder goes into liquidated damages on a current Contract with the Commission during the advertisement period for a letting, the Contractor will be notified seven business days prior to the letting that they will not be allowed to bid in the upcoming letting. This notification will be officially transmitted through Doc Express for the project in liquidated damages and via email.

Upon notification that they will not be allowed to bid in the upcoming letting, the Contractor will be provided an opportunity to request a reconsideration of this decision. This request must be transmitted in the form of a letter through Doc Express and via email to the Department for review within two (2) business days of receipt. The Department will review the reconsideration request and render a decision no later than the Friday prior to the letting.

Please note, a bid may be withdrawn at any time prior to the time specified for the bid letting. If a Contractor has been notified that they will not be allowed to bid, and they do not withdraw their bid, the bid will be considered invalid and rejected.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SPECIAL PROVISION
JOB NO. A20044
ELECTRONIC TICKETING SYSTEMS (E-TICKETING)

Division 100 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The following is added as **Subsection 109.01(m)**:

(m) Electronic Ticketing System. The Department has contracted with an Electronic Ticket Delivery System (E-Ticketing) application known as HaulHub for use by ARDOT personnel on projects. A Contractor/Supplier Portal is also available for use by the Contractor or Supplier, if desired. This portal is included at no cost to the Contractor or Supplier. HaulHub has provided a web page detailing how the software works and how to get started here: <https://www.haulhub.com/agency/arkansas>. Upon request of the Contractor, HaulHub may be used in lieu of paper tickets, subject to the requirements outlined herein. The Contractor must notify the Resident Engineer and email sitemanager@ardot.gov to activate the E-Ticketing application.

The Contractor shall coordinate with HaulHub (and if applicable, the ACHM Supplier) to facilitate integration of HaulHub to the electronic ticket data. HaulHub can accommodate most configurations of systems, including API connections to data and direct database connections, among others. The connection with HaulHub will be a Read-Only connection, allowing the application to receive load information only. HaulHub can also work with other E-Ticketing vendors to share data, if that approach is needed/preferred.

The Contractor shall comply with all applicable laws and regulations pertaining to bills of lading and ensuring the trucks have proper documentation onboard during transport, but paper tickets will not typically be collected by Department personnel. At project locations where mobile devices cannot achieve consistent connectivity, alternative means of material ticket collection may be necessary at the discretion of the Engineer. Alternative methods may include software offline modes (handled by HaulHub) or hardcopy paper ticketing.

No additional compensation will be made for the use of HaulHub on this project. There should also be no direct cost to the Contractor or Supplier in most cases.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SPECIAL PROVISION
JOB NO. A20044
DESIGN AND QUALITY CONTROL OF ASPHALT MIXTURES

Division 400 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The eighth and tenth bullet within the first paragraph of **Subsection 404.01, Design of Asphalt Mixtures. (a) General** is hereby deleted and the following added:

- A one-gallon sample of performance grade asphalt binder to be used in all Section 405 Asphalt Concrete Hot Mix Base Course and Section 406 Asphalt Concrete Hot Mix Binder Course mix designs.
- Five blended aggregate samples for all Section 405 Asphalt Concrete Hot Mix Base Course and Section 406 Asphalt Concrete Hot Mix Binder Course mix designs.
- A two-gallon sample of performance grade asphalt binder to be used in all Section 407 Asphalt Concrete Hot Mix Surface Course mix designs.
- Ten blended aggregate samples for all Section 407 Asphalt Concrete Hot Mix Surface Course mix designs.

The last sentence of the last paragraph of **Subsection 404.01 Design of Asphalt Mixtures. (a) General** is hereby deleted and the following substituted therefor:

At least fifteen (15) business days shall be allowed for the review of the mix design.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SPECIAL PROVISION
JOB NO. A20044
LONGITUDINAL JOINT DENSITIES FOR ACHM SURFACE COURSES

DIVISION 400, ASPHALT PAVEMENTS, of the Standard Specifications, Edition of 2014, is hereby amended as follows:

The following is added after the first paragraph of **Subsection 407.04, Construction Requirements and Acceptance**:

A notched wedge joint is required along all unconfined longitudinal joints where paving lifts are 2 inches or greater in depth. Notched wedge joints shall have a slope no greater than 1:12 from the pavement mat and may only be used when the depth of the mat is greater than 1½ inches. The notched wedge is not required in areas of build up for slope adjustments. The adjacent lane may be milled to allow the placement of the notched wedge joint. Interstate projects that are mill and fill shall not mill the adjacent lane until the new asphalt has been placed. Joints shall not be placed in the wheel path. Notched wedge joints will not be required between the shoulder and travel lane.

For mill and fill locations that are not constructed using a notched wedge, a milled or cutback joint shall be formed using a milling machine or saw to create a vertical face in the first mat after it has been compacted. No more than 2" in width shall be cut or sawed into the new mat to create a clean joint free of loose aggregates or old asphalt. Tack shall cover the notched wedge and/or vertical face prior to placing the adjacent lane.

The third paragraph of **Subsection 410.07, Spreading and Finishing**, is hereby deleted and the following is substituted therefor:

The longitudinal joint in one layer shall offset that in the layer immediately below by approximately 6". When possible, the joint in the top layer shall be at the centerline of the pavement if the roadway comprises two lanes in width, or at lane lines if the roadway is more than two lanes in width. On roadways with a center turn lane, the Contractor may, at his option, elect to place a joint at the crown (i.e., middle of the center turn lane) of the roadway and eliminate the joints on the lane lines of that lane. The slight excess of asphalt at a longitudinal joint, generated by overlapping during placement of an adjacent mat to a previous mat, shall not be scattered across the mat.

The asphalt screed shall be operated in vibration mode while placing the mixture. Auger gates and tunnels should be extended to within 12 to 18 inches of the end gate to ensure material is not being pushed and segregated. An approved release agent may be applied to tow behind rollers used to compact notch wedge joints.

The second sentence of the fifth paragraph of **Subsection 410.07, Spreading and Finishing**, is hereby deleted and the following is substituted therefor:

The top layer of a notched wedge joint shall be placed within three days of constructing the notch.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

SUBMISSION OF ASPHALT CONCRETE HOT MIX ACCEPTANCE TEST RESULTS

Division 106 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The following is hereby added to **Subsection 106.04, Acceptance of Materials**:

All ACHM Contractor Acceptance Tests shall be signed by the technician and submitted electronically through Doc Express in pdf format, and a signed paper copy be given to the ARDOT plant inspector after the completion of each subplot.

The ACHM Microsoft Excel Spreadsheet for Contractors/Suppliers is the required form for documentation and can be downloaded from the following website:

<https://ardot.gov/divisions/construction/construction-information/for-use-on-feb-2024-letting-and-later-achm-spreadsheet/>

To download this file, follow the instructions on the page linked above. Use of this file requires Microsoft Excel.

Any questions or issues arising from the use of this file should be referred to the Resident Engineer.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

PRICE ADJUSTMENT FOR ASPHALT BINDER

A price adjustment clause is included in this Contract to provide additional compensation to the Contractor or a credit to the Department for fluctuations in asphalt binder prices. This price adjustment is dependent upon a change in the average price of asphalt binder which results in an increase or decrease in the price of products utilized on this project.

Payment. Payment will be made to the Contractor for monthly fluctuation in the price of asphalt binder used in performing the applicable items of Asphalt Concrete Hot Mix and Ultrathin Bonded Wearing Course work as listed in the table below when the asphalt binder price fluctuates from the base price defined below. Payment may be positive, negative, or nonexistent depending on the circumstances. Payments or deductions for the asphalt binder price adjustment will be included in the Contractors current estimates, and the payment or deduction authorized for each estimate will be based upon the quantities for applicable items of work.

The Asphalt Binder Price Adjustment will be a dollar amount paid as compensation to the Contractor, or as a credit to the Department as reflected on the Current (or Final) Estimate Summary Report as Payment Adjustments.

Asphalt Binder Price Adjustment (ABPA). The Asphalt Binder Price Adjustment (ABPA) for the current estimate will be computed according to the following formula:

$$ABPA = Q \times D \times (IQP / 100)$$

Where

- ABPA = Asphalt binder price adjustment, in dollars;
- Q = Quantities paid for the applicable items on the current estimate; tons of mix for ACHM items or square yards for Ultrathin Bonded Wearing Course
- D = Allowable price differential, in dollars;
- IQP = Item Quantity Percent, Quantity of Indexed Material per unit of the applicable item on the current estimate.

The above formula will be applied to each individual payment of the applicable item. When the Current (or Final) estimate is generated, the sum of these individual adjustments will be included as a Payment Adjustment.

Applicable Items of Work		
ITEM OF WORK	SPECIFICATION NUMBER	ITEM QUANTITY PERCENT
Asphalt Binder in ACHM Base Course	405	100
Asphalt Binder in ACHM Binder Course	406	100
Asphalt Binder in ACHM Surface Course	407	100
Ultrathin Bonded Wearing Course (Type B)	SP	5.5
Ultrathin Bonded Wearing Course (Type C)	SP	5.4

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

PRICE ADJUSTMENT FOR ASPHALT BINDER

The terms of this Special Provision will apply only to the items listed in this Special Provision table above. No other items on the contract will be subject to the terms of this Special Provision.

The allowable price differential, "D", for the current estimate will be computed according to the following formula, using the appropriate binder grades:

$$D = P - P(b)$$

P, the asphalt binder current price in dollars per ton, is the Monthly Asphalt Binder Price Index for the month in which the payment entry is entered.

P(b), the asphalt binder base price in dollars per ton, is the Monthly Asphalt Binder Price Index for the month in which the bids for the work were received.

Asphalt Binder Index Determination.

PG64-22 Binders. The Monthly Asphalt Binder Price Index for PG64-22 binders will be determined by calculating the average for performance-graded binder using the Selling Price of PG 64-22 paving grade. The monthly asphalt binder price will be an average of five asphalt binder prices. The prices will be furnished by the four largest asphalt binder suppliers in the State of Arkansas as determined by the previous calendar year. For an asphalt supplier to be included in the asphalt binder price index they must supply at least ten percent of the asphalt binder in Arkansas. The final component in the asphalt binder price index will be the Asphalt Weekly Monitor® furnished by Poten & Partners, Inc. The issue of the Asphalt Weekly Monitor® used will be for the last full week in the previous month received by the Department prior to the first day of the index month. The four largest suppliers included in the asphalt binder price index shall furnish the Department with their average price on the Thursday before the Friday of the last full week of the month. If any supplier fails to submit a price by this deadline, that supplier's price will not be included in the asphalt binder price index for that month.

PG70-22 and PG76-22 Binders (including Asphalt Binder in Ultrathin Bonded Wearing Course). The monthly Asphalt Binder Price Index for PG70-22 and PG76-22 binders (including asphalt binder in Ultrathin Bonded Wearing Course) will be determined by the same method above, except that the price from the Asphalt Weekly Monitor® will not be used in the calculation of the monthly average binder price. The monthly asphalt binder price for PG70-22 and PG76-22 binders will be calculated using the average of the prices supplied by the four largest binder suppliers in the State for those grades.

Supplemental Items Subject to Adjustment. Items included in the contract that are listed in the table above are subject to adjustment in accordance with this provision, regardless of any amount of overrun to the plan quantity. Any new items of work added to the Contract by supplemental agreement that are listed in the table above will be subject to the asphalt binder price adjustments in accordance with this provision. The base asphalt binder price, P(b), for any newly added eligible items will be the same P(b) as the eligible items in the Contract, and the new unit price established by supplemental agreement will be determined accordingly.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

PRICE ADJUSTMENT FOR ASPHALT BINDER

Viewing Asphalt Binder Price Index. Historical asphalt binder price index values will be available in the "Asphalt Binder Index Report" document located on the ARDOT website at <https://ardot.gov/divisions/construction/construction-information/> under Asphalt Binder Information.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

PRICE ADJUSTMENT FOR FUEL

A price adjustment clause is included in this Contract to provide additional compensation to the Contractor or a credit to the Department for fluctuations in diesel fuel prices. This price adjustment is dependent upon a change in the average price of fuel which results in an increase or decrease in the price of products utilized on this project. For the purposes of this specification, it is assumed that all fuel used is diesel fuel and that the fuel use factors shown in the table below cover all fuel used in delivery to the plant, production, hauling to the job site, placement, and finishing of the items of work shown.

Payment. Payment will be made to the Contractor for monthly fluctuation in the price of diesel fuel used in performing the applicable items as listed in the table below when the diesel fuel price fluctuates from the base price defined below. Payments may be positive, negative, or nonexistent depending on the circumstances. Payments or deductions for the fuel price adjustment will be included in the Contractor's current estimates, and the payment or deduction authorized for each estimate will be based upon the quantities for applicable items of work. Subcontracts should include the payment or deduction of fuel price adjustments on pay items listed in the table below when those items are included in a subcontract.

The Fuel Price Adjustment will be a dollar amount paid as compensation to the Contractor, or as a credit to the Department as reflected on the Current (or Final) Estimate Summary Report as Payment Adjustments.

Fuel Price Adjustment (FPA). The Fuel Price Adjustment (FPA) for the current estimate will be computed according to the following formula:

$$FPA = Q \times F \times D$$

Where

- FPA = Fuel price adjustment, in dollars;
- Q = Quantities paid for the applicable items on the current estimate,
- F = The Fuel Use Factor for the applicable items of work subject to this price adjustment, as listed in the table below,
- D = Allowable price differential, in dollars.

The above formula will be applied to each individual payment of the applicable item. When the Current (or Final) estimate is generated, the sum of these individual adjustments will be included as a Payment Adjustment.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

PRICE ADJUSTMENT FOR FUEL

Fuel Use Factors		
Item of Work	Specification Numbers	Fuel Use Factor Per Unit
Earthwork: (Unclassified Excavation, Compacted Embankment, Selected Material)	210,302	0.34 gal./C.Y.
Soil Stabilization	Special Provision	2.28 gal./ton
Shaping: (Shaping Roadway Section, Subgrade Preparation, Trenching and Shoulder Preparation, Scarifying and Recompacting Shoulders)	213,214,215,216	2.52 gal./Station
Base Course and Stone: (Stone Backfill, Aggregate Base Course, Soil Aggregate in Cement Treated Base Course, Aggregate in Cement Stabilized Crushed Stone Base Course, Mineral Aggregate in Asphalt Surface Treatment)	207,303,307,308,309,310,402	0.54 gal./ton
ACHM Paving: (ACHM Base Course, ACHM Binder Course, ACHM Surface Course, Open Graded Asphalt Base Course)	405,406,407,417	2.36 gal./ton
Ultrathin Bonded Wearing Course (All Types)	Special Provision	2.18 gal./ton
Milling: (Cold Milling Asphalt Pavement, Grinding Portland Cement Concrete Pavement)	412, 510	0.18 gal./S.Y.
PCC Paving: (Portland Cement Concrete Base, Open Graded Portland Cement Concrete Base, Portland Cement Concrete Pavement, High Early Strength Concrete Pavement, Continuously Reinforced Concrete Pavement, Portland Cement Concrete Driveway)	309, 310,501,503,505	0.44 gal./S.Y.
Structural Concrete (Approach Slabs, Approach Gutters, Class B Concrete-Bridge, Class S Concrete-Bridge, Class S(AE) Concrete-Bridge, Seal Concrete-Bridge, Class A Concrete-Roadway, Class S Concrete-Roadway)	504, 802	1.75 gal./C.Y.
Flatwork: (Concrete Ditch Paving, Concrete Islands, Concrete Walks, Wheelchair Ramps)	605,632,633,641	0.30 gal./S.Y.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

PRICE ADJUSTMENT FOR FUEL

When the units of measure in this contract for the items of work listed in the table do not correspond with the units shown in the table (i.e. Asphalt Concrete paid by the square yard, etc.), those items will not be subject to the terms of this special provision or any fuel price adjustment.

The allowable price differential, "D", for the current estimate will be computed according to the following formula:

$$D = P - P(b)$$

P, the current fuel price in dollars per gallon, is the Monthly Fuel Price Index for the month in which the payment entry is entered.

P(b), the fuel base price in dollars per gallon, is the Monthly Fuel Price Index for the month in which the bids for the work were received.

Fuel Price Index Determination. The Monthly Fuel Price Index will be determined by using the On-Highway retail price for No. 2 Diesel Fuel – ULS (Ultra Low Sulfur), as listed for the US Gulf Coast region on the U.S. Energy Information Administration's website. The value used will be that for either the closest Monday prior to the first calendar day of the index month or the first calendar day of the index month, if that is a Monday.

https://www.eia.gov/opendata/qb.php?sdid=PET.EMD_EPD2DXL0_PTE_R30_DPG.W

Supplemental Items Subject to Adjustment. Items included in the contract that are listed in the table above are subject to adjustment in accordance with this provision, regardless of any amount of overrun to the plan quantity. Any new items of work added to the Contract by supplemental agreement that are listed in the table above will be subject to the fuel price adjustments in accordance with this provision. The base fuel price, P(b), for any newly added eligible items will be the same P(b) as the eligible items in the Contract, and the new unit price established by supplemental agreement will be determined accordingly.

Viewing Fuel Price Index. Historical fuel price index values will be available in the "Asphalt Binder Index Report" document located on the ARDOT website under Fuel Price Information at <https://ardot.gov/divisions/construction/construction-information/>.

Opt Out Option. The Contractor, at its own discretion, can choose to opt out of the adjustments for fuel prices determined by this special provision. If the Contractor wishes to utilize this option, an authorized representative of the firm must sign the form on Page 4 of this special provision and submit it to the Department at PMD@ardot.gov prior to the time and date of the bid letting for this project. This representative must currently be listed with the Department as an officer approved to sign contracts in the firm's name.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

PRICE ADJUSTMENT FOR FUEL

OPT OUT OF PRICE ADJUSTMENTS TO FUEL

As an authorized representative of this company, I hereby choose the option to opt out of the price adjustments for fuel for all pay items allowable by this special provision for this contract. By signature of this form, my firm waives all payment adjustments for fuel indexing for the duration of this project and waives any subsequent appeals for additional compensation for fuel price fluctuations.

This action only applies to the construction contract for the job number listed in the header of this document.

Printed Name: _____ Title: _____

Signature: _____ Date: _____

Company Name: _____

NOTE: To opt out, this completed form must be submitted to the Department at PMD@ardot.gov prior to the time and date of the bid letting for this project.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

WARM MIX ASPHALT

DESCRIPTION: The Department will allow the use of Warm Mix Asphalt (WMA). All provisions for the production and placement of conventional HMA mixtures as stipulated in Section 410 Construction Requirements and Acceptance of Asphalt Concrete Plant Mix Courses of the Standard Specifications for Highway Construction, Edition 2014, are applicable except as noted below.

Section 410 Construction Requirements and Acceptance of Asphalt Concrete Plant Mix Courses of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

Section 410.03: Replace the third sentence with "WMA production temperatures at the plant shall be according to the Contractor's approved mix design but may be adjusted based on recommendations of the WMA additive/process manufacturer."

Add the following paragraph: "Implementation of best management practices in the control of aggregate moisture content prior to introduction to the drying or mixing drum is highly recommended in order to achieve the maximum benefit of WMA technology."

Section 410.07: Replace the last sentence of the first paragraph with "Spreading and finishing temperatures shall be according to the Contractor's approved mix design, but in no case shall the WMA be placed at a temperature less than 220° F."

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

COLD MILLING - COUNTY PROPERTY

Section 412 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The second sentence of **Subsection 412.01** is hereby deleted and the following is substituted therefor:

The material generated from the milling of tapers or butt joints at the beginning and end of the project, the tapers or butt joints transitioning to an existing structure, and tapers or butt joints at adjoining county roads, city streets, or highways on the project shall be transported and stockpiled at the location shown in the plans and shall become the property of the county in which the project is located or to an adjoining county as designated by the Engineer. The location and quantity of these millings will be designated on the plans or provided by the Engineer. The millings shall be stockpiled in a trapezoidal shape, or as directed by the Engineer, which can be easily measured.

Material generated from the cold milling operations for rut milling, removal of an ACHM overlay of a bridge deck, or other conditions not designated above shall become the property of the Contractor.

The following is added as the second sentence of **Subsection 412.05, Basis of Payment**:

No direct payment will be made for loading, hauling, and stockpiling of the milled material. Full payment will be considered included in the unit price bid for Cold Milling Asphalt Pavement.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

CONSTRUCTION PROJECT INFORMATION SIGN

DESCRIPTION: This project includes Construction Project Information Signs to inform the public of pertinent job information. Included in this information is the job number, start date, and estimated completion date. Additional information to be included on this sign can be viewed on the special detail in the plans. Location and quantity of signs for this project is located in the Maintenance of Traffic Details.

MATERIALS: All materials incorporated into the project for this sign shall conform to the specifications pertaining to Signs in Section 604 in the Standard Specifications for Highway Construction and appropriate supplemental specifications. The numerals and letters for both date fields may be placed on separate sign blank material that can then be attached to the larger sign blank or be furnished as sections of reflective sheeting that can be used to overlay a revised date. The dimensions of the letters and numbers shall match the sizes shown in the project's special detail. The sign blank material and reflective sheeting used for the date fields shall be the same types used for the overall sign.

CONSTRUCTION REQUIREMENTS: The start date shown on the sign shall be either Early, Mid, or Late followed by the year for the date the Contractor plans to begin work on a new project. (Early includes January through March, Mid includes April through July, Late includes August through December). The initial estimated completion date to be placed on the sign will be either the completion date shown in the project's CPM schedule or a date based on information provided by the Contractor and agreed to by the Engineer. The estimated completion date will be shown as Early, Mid, or Late followed by the year. The Contractor will be required to update the sign's estimated completion date information, timeframe (Early, Mid, or Late) and/or Year, if and where directed by the Engineer throughout the duration of the project.

The Construction Project Information Sign shall be installed at the same time when all other advanced warning signs are installed on the project. The Contractor will have five (5) business days from the time the Engineer informs the Contractor to update the Estimated Completion Date on the Construction Project Information Sign. Failure to change the date on the sign after five (5) days may lead to the holding of pay estimates until the dates are updated.

METHOD OF MEASUREMENT: Construction Project Information Sign will be measured by the square foot of sign area and will be paid under the contract item "Signs". Construction Project Information Sign Update will be measured by the each, which shall consist of updating the timeframe (Early, Mid, or Late) and/or Year. Updates that require a change in both the timeframe and year will not be treated separately and shall be paid as a quantity of one (1) each.

PAYMENT: **Construction Project Information Sign.** The contract unit price bid per square foot for Signs shall be full compensation for all materials, labor, equipment, tools, and incidentals necessary for installing, and for maintenance, repair, and removal of the Construction Project Information Signs.

CONSTRUCTION PROJECT INFORMATION SIGN UPDATE. The contract unit price bid for this item shall be full compensation for furnishing and installing the overlay or sign blank insert for

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

CONSTRUCTION PROJECT INFORMATION SIGN

updating the Estimated Completion Date, for all materials, labor, equipment, tools, and incidentals necessary for installing and maintaining the date field on the sign. This item will be paid each time the Resident Engineer requests an updated date be installed on the Construction Project Information Sign.

Payment will be made under:

Pay Item	Pay Unit
Construction Project Information Sign Update	Each

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

ROADWAY CONSTRUCTION CONTROL – PAVEMENT PRESERVATION

Section 635 Roadway Construction Control of the Standard Specifications for Highway Construction, Edition of 2014, is hereby deleted and the following is substituted therefore:

Section 635.01 Description. This item shall consist of furnishing and maintaining all lines, grades, and measurements necessary for the proper execution of the work under the pavement preservation project Contract, all according to the plan, special provisions, and specifications.

Section 635.02 Materials. The Contractor shall furnish all stakes, surveying equipment, and other devices necessary for establishing, setting, checking, marking, and maintaining points, lines, grades, layout, and stationing of the work called for on the plans and in the specification.

Section 635.03 Construction Requirements.

(a) Department Responsibilities.

The Department will be responsible for taking all measurements to establish both current estimate and final estimate pay quantities. When making these measurements, the Engineer may use any points, stakes, lines, or elevations that have been set by the Contractor.

Any information provided by the Department shall be verified by the Contractor before use, and the Contractor shall accept full responsibility for any costs incurred as a result of the use of such information. Any checking performed by the Department will not relieve the Contractor of the responsibility for the final results.

(b) Contractor Responsibilities. Roadway Construction Control shall include the use by the Contractor of the plans to perform required construction surveying and layout as outlined below.

(1) Projects without subgrade widening and/or profile grade line

The Contractor shall mark the stationing by setting a stake at least every 200 feet along the roadway. These stakes shall be placed and maintained on the shoulder or slope so that they will not interfere with the construction operations, but will be usable for determining locations along the roadway. In urban areas where staking is not feasible, markings shall be clearly established and maintained so as to be easily identifiable, but not in a manner that is destructive to adjacent structures and/or monuments. The Begin Job Log Mile as identified in the plans, shall be established as station 100+00.

The Contractor shall establish and maintain centerline throughout the project. On projects without a profile grade line, the existing cross slopes are considered acceptable. The contractor shall be responsible for maintaining existing cross slopes unless otherwise shown on the plans.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

ROADWAY CONSTRUCTION CONTROL – PAVEMENT PRESERVATION

(2) Projects with subgrade widening and/or profile grade line

In addition to the requirements in 635.03(b)(1) above, the Contractor shall be responsible for the following.

The Contractor shall profile the existing pavement at the centerline, lane lines, and edges of pavement for the length of the widening section plus 500 feet on each end. This profile data shall be furnished to the Department for the Department's use in the establishment of the finished grade line. This finished grade line will be furnished to the Contractor for use in computing and setting all grades required to construct the finished roadway section.

The Contractor shall not be responsible for grades beyond the edge of shoulder or correcting preexisting cross and superelevation slopes unless otherwise shown on the plans.

The Contractor shall make all necessary calculations, marking, and staking, including, but not limited to, centerline, offset, stationing, slopes, pavement lines, lane lines, grade, guardrail, and any other points or lines deemed necessary for proper control of the work.

The Contractor shall be responsible for joining the work to contiguous roadways and/or bridges in an acceptable manner. This shall include making minor adjustments to the plan grade and/or typical section as necessary to construct a smooth transition to match the existing roadway.

The Contractor shall provide sufficient qualified personnel to complete the work accurately. The supervision of the Contractor's surveying and layout personnel shall be the responsibility of the Contractor, and any errors resulting from the operations of such personnel shall be adjusted or corrected by the Contractor at no cost to the Department.

The Contractor shall be responsible for the accuracy and uniformity of the construction stakes, lines, grades, and layouts. Any errors in the work constructed due to errors in the Contractor's Roadway Construction Control shall be adjusted or corrected by the Contractor at no cost to the Department.

The Contractor shall remove all stakes upon the Engineer's determination that the project is substantial complete.

Section 635.04 Method of Measurement. Roadway Construction Control will be measured as a complete unit.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

ROADWAY CONSTRUCTION CONTROL – PAVEMENT PRESERVATION

Section 635.05 Basis of Payment. Work completed and accepted and measured as provided above will be paid for at the contract lump sum price bid for Roadway Construction Control, which price shall be full compensation for furnishing and maintaining all necessary lines, grades, and measurements; and for furnishing all engineering personnel, equipment, materials, tools, and incidentals necessary to complete the work.

No adjustments in the lump sum price bid will be made for Roadway Construction Control required due to normal increases or decreases in Contract quantities.

Payments for Roadway Construction Control will be made in proportion to the amount of work accomplished on the project. The amount may be adjusted by the Engineer for preliminary work as demonstrated by the Contractor.

No additional payment will be made for re-staking needed to maintain the control.

Payment will be made under:

Pay Item	Pay Unit
Roadway Construction Control	Lump Sum

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

RUMBLE STRIPS

Section 642 Rumble Strips of the Standard Specifications for Highway Construction, Edition of 2014, is hereby expanded to include the items Centerline Rumble Stripes in Asphalt Roadways, Rumble Stripes in Asphalt Shoulders, and Rumble Stripes in Portland Cement Concrete Shoulders.

Subsection 642.01 Description is hereby deleted and the following substituted therefore:

642.01 Description. This item shall consist of constructing rumble strips and rumble stripes on the centerline of asphalt roadways, on asphalt shoulders, and on Portland cement concrete shoulders according to these specifications and conforming to the details shown on the plans.

For the purpose of this special provision, rumble strips and rumble stripes will all be referred to as rumble strips.

Permanent pavement markings are not included in the price bid for rumble strips and shall be installed and paid for per the Standard Specifications.

The last sentence of Subsection 642.02 Equipment is hereby deleted and the following substituted therefore:

The cutting head(s) shall be suspended from the power unit in a manner that will allow the tool to self-align itself with the slope of the roadway or shoulder and/or any irregularities in the pavement surface.

Subsection 642.03 Construction Requirements is hereby deleted and the following substituted therefore:

(a) Rumble Strips and Rumble Stripes in Asphalt Shoulders. The rumble strips shall be cut in the existing shoulders at the locations shown on the plans or as designated by the Engineer. Prior to commencement of the work, the Contractor shall demonstrate to the Engineer the ability to achieve the desired results without damaging the existing pavement. The Contractor shall remove existing raised pavement markers as the work progresses.

At the end of each working day, all equipment shall be removed from the roadway or parked no closer than 30' (15 m) from the nearest traveled lane. The pavement shall be thoroughly cleaned by sweeping or flushing. All excess material shall be disposed of in a manner approved by the Engineer.

The pavement markings shall be placed in accordance with Section 604.03(f) of the Standard Specifications. If interim or construction pavement markings are needed, edge lines will be required.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

RUMBLE STRIPS

- (b) Rumble Strips and Rumble Stripes in Portland Cement Concrete Shoulders.** The contractor shall have the option of cutting the rumble strips according to the above requirements or forming the rumble strips in the fresh concrete according to the requirements of Section 506.

The pavement markings shall be placed in accordance with Section 604.03(f) of the Standard Specifications. If interim or construction pavement markings are needed, edge lines will be required.

- (c) Centerline Rumble Stripes in Asphalt Roadways.** The rumble stripes shall be cut on the centerline of existing asphalt roadways at the locations shown on the plans or as designated by the Engineer. Prior to commencement of the work, the Contractor shall demonstrate to the Engineer the ability to achieve the desired results without damaging the existing pavement. The Contractor shall remove existing raised pavement markers as the work progresses.

At the end of each working day, all equipment shall be removed from the roadway or parked no closer than 30' (15 m) from the nearest traveled lane. The pavement shall be thoroughly cleaned by sweeping or flushing. All excess material shall be disposed of in a manner approved by the Engineer.

The pavement markings shall be placed in accordance with Section 604.03(f) of the Standard Specifications. If interim or construction pavement markings are needed, edge lines will be required.

Subsection 642.04 Method of Measurement is hereby deleted and the following substituted therefore:

Rumble strips in asphalt or Portland cement concrete shoulders will be measured by the linear foot (meter) longitudinally along the shoulder on which the rumble strips are constructed. No measurement or payment will be made for gaps, driveways, turnouts, or other public road intersections where the rumble strips have not been constructed.

Centerline rumble stripes will be measured by the linear foot (meter) longitudinally along the centerline of the roadway on which the rumble stripes are constructed. No measurement or payment will be made for turnouts or other public road intersections where rumble stripes have not been constructed.

Subsection 642.05 Basis of Payment is hereby deleted and the following substituted therefore:

Work completed and accepted and measured as provided above will be paid for at the contract unit price bid per linear foot (meter) for Rumble Strips in Asphalt Shoulders, Rumble Strips in Portland Cement Concrete Shoulders, Rumble Stripes in Asphalt Shoulders, or

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

RUMBLE STRIPS

Rumble Stripes in Portland Cement Concrete Shoulders, which price shall be full compensation for constructing the rumble strips; for cleaning the pavement; for disposing of excess material; and for all labor, equipment, tools, and incidentals necessary to complete the work. Permanent pavement markings are not included in the price bid for rumble strips and shall be installed and paid for per the Standard Specifications.

Work completed and accepted and measured as provided above will be paid for at the contract unit price bid per linear foot (meter) for Centerline Rumble Stripes in Asphalt Roadways, which price shall be full compensation for removing the existing raised pavement markers; for constructing the rumble stripes; for cleaning the pavement; for disposing of excess material; and for all labor, equipment, tools, and incidentals necessary to complete the work. Permanent pavement markings are not included in the price bid for rumble stripes and shall be installed and paid for per the Standard Specifications.

The following items are added to the list of pay items:

Pay Item	Pay Unit
Centerline Rumble Stripes in Asphalt Roadways	Linear Foot (Meter)
Rumble Stripes in Asphalt Shoulders	Linear Foot (Meter)
Rumble Stripes in Portland Cement Concrete Shoulders	Linear Foot (Meter)

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

PORTABLE TRAFFIC SIGNAL SYSTEM

1. **DESCRIPTION.** This item shall consist of furnishing and installing at location(s) shown on the plan sheet(s) or as directed, a Portable Traffic Signal System. All requirements of Standard Specifications for Highway Construction, Edition of 2014, shall apply. Portions of the standard specifications may be superseded by these special provisions.

A. General. This specification outlines an operationally independent self contained system for temporary traffic control. Included are the specifications for the portable mast arm trailer, the traffic control unit with cabinet and terminal facility, vehicle actuation, wireless communications, solar system for battery charging, battery system and other ancillary equipment necessary to provide a complete working system.

B. Functional. The system shall include, as a minimum, the following features:

(a) Mast Arm Trailer:

The unit shall be a towable, trailer mounted, hydraulically lifted mast and arm. It shall have two (2) 12 inch, 3 section traffic signal heads with (optional) back-plates. The unit shall include a battery powered hydraulic pump for raising and lowering the arm. Lifting mechanisms using cable, winches, or linear actuators are not acceptable. The chassis of the unit shall provide multiple points at which auxiliary equipment may be mounted. The trailer shall have 15 inch wheels; fenders, and standard DOT required trailer lights. The unit shall have a drop tongue that can be hinged down and locked toward the ground as well as be removable. The tongue shall be provided with a standard 2" inch ball hitch. There shall be 2000 lb capacity extendable leveling jacks at each of the four corners of the trailer. In the folded position, the unit less the hitch shall not exceed the following over-all dimensions: 84" width, 150" length, or 114" height. The removable hitch will typically extend 56 inches in front of the trailer. In the horizontal position, the trailer mast arm shall have a fixed 9' reach from the side of the trailer and give a minimum of 17' feet clearance over the baseline established by the jacks. A lock or fixed mechanism shall keep the arm from lowering once the reach is established. With two ITE approved 12" 3-section signals in place: one at the outer end of the arm, the other mounted on the vertical mast, each equipped with optional back-plates and tunnel visors. The unit shall withstand 80 mph wind gusts. The wind gust rating assumes that the entire weight of the unit is carried by the jack stands, that the unit is level, and that the jack stands are on clean, dry pavement. The chassis and mast shall be labeled to designate pinch points, electrical hazards and overhead power line cautions. There shall be an electrical grounding lug provided to terminate to a user supplied driven electrical ground. The primary pivot point of the mast, when fully extended, shall have a positive mechanical lock to ensure that the mast remains upright. All other joints and extensions of the mast or arm shall have positive mechanical locks or pins to prevent the collapse or unauthorized movement or dismantling of the mast or arm. The unit shall have a receiver type hitch in the rear, enabling a receiver tube to be installed for towing multiple units in tandem. The unit shall include a rear electrical receptacle for plugging in lights from a 2nd unit for tandem towing. The hydraulic pump shall power

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

PORTABLE TRAFFIC SIGNAL SYSTEM

the mast in both up and down directions. The pump flow shall be restricted to limit the maximum speed of travel of the arm to a safe speed. Operator safety shall be enhanced by the use of a nonconductive pendant to operate the pump via a minimum 6' long cable, allowing the operator to step away from the trailer so that he can clearly watch the mast as it rises to observe for power lines, traffic or other obstructions. The hydraulic pump and pump battery terminations shall be housed in a lockable enclosure. The unit shall be powder coated a highway safety orange, and have reflective decals placed appropriately to meet DOT requirements for where used. The unit shall have an axle and suspension rated adequately to handle the overall trailer weight. Trailers that have a gross weight over 3,000 lb, shall be equipped with trailer brakes. The system shall comply with the requirements for Portable Traffic Control Signals as defined in the Federal Manual of Uniform Traffic Control Devices (MUTCD), Part IV, 4D, including specifically the requirements pertaining to signal heads, lamps, spacing of signals, clearance, and number of signal faces. For optimizing signal viewing, signal mountings shall allow a 180 degrees' vertical axis of rotation and adjustments also for up and down alignments. The system shall be delivered with matching key padlocks for all the enclosures.

(b) Emergency Portable Mast Arm Knock-Down Capability:

Each independent portable signal trailer shall have the capability to flash yellow or red or be used as a "knock down" replacement portable mast arm, independent of other trailers. In this case the control system shall enable external AC signal inputs to run the LED signal heads independent of the normal control system.

(c) Traffic Signal Timer Controller:

The controller shall conform to NEMA TS-1 controller functionality and shall be menu driven through a menu driven display and keypad. The display shall be able to show programming parameters, and real time operational parameters not limited to each timing interval being timed including green min, green max, green extensions, yellow, and red as well as which phase is being timed. Standard traffic signal nomenclature shall be used, making the assumption that a movement of traffic is a phase and that individual parts of the phases timing are intervals. The controller shall have a minimum 8 phase controller functionality and shall have a minimum of 6 output circuits at each master or remote location. If the trailer signal outputs are DC for DC LED signal heads, provision shall be provided for running the DC signal heads from an AC signal source. The traffic controller shall have the following additional features:

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

PORTABLE TRAFFIC SIGNAL SYSTEM

- **GREEN RECYCLE:** The controller shall be set up to enable a “recycle” in the middle of the “all red clearance” time when the phase just clearing is headed toward a red rest but receives a vehicle call and there is no other phase receiving a call to service. When this controller is being operated in an actuated mode, this feature shall time an adjustable time interval, typically 5 seconds, before engaging the recycle. The recycle when activated recycles back to green of the last phase serviced, cutting off the remaining “all red time”. (This is sometimes called “green revert”.) In no case would the recycle be activated if vehicle calls (or any type of call to service) remain on any other phases. The all red time related to each phase using the “green recycle” is effectively made up of two timing intervals, the first a minimum 0-25.5 second interval and the second an interval of minimum 0-255 seconds.
- **CONTROLLER MEMORY:** The controller shall have the ability to register and retain a vehicle call on any designated phase if the vehicle call was made at the time when the clearance intervals were initiated. This is to insure that the phase is serviced at the next appropriate place in the controller phasing, reducing the likelihood of traffic being trapped in the “detection zone”. The controller and power systems shall have adequate over current protection using breakers or fuses. Fuses shall be industry standards if used.
- **CONFLICT MONITOR:** The conflict monitor shall conform to minimum NEMA TS1 monitor functionality. Monitors shall be factory tested before installation. A multiple trailer signal system consisting of master-secondary arrangements shall, by design, remain inoperable unless the conflict monitor is installed. Provision shall be made in the monitoring system to accommodate different phasing and numbers of remote trailers. It shall also be able to monitor 5 section heads. Monitoring shall be done according to standard permanent signal conventional functionality except for having connections being made wireless through the radio system.
- **MODES OF FAILURE:** If the conflict monitor orders a fail mode, the traffic signals shall display a default flashing red (also programmable yellow, steady yellow and steady red) at both ends of the work zone. If there is a loss of power, the traffic signals shall be dark on the trailer affected and the traffic signals on the other trailer shall flash. The monitoring system shall be able to detect the difference between soft and hard fail conditions. If enabled, soft fail conditions such as loosing the radio signal shall enable the system to restart if and when the soft fail condition is corrected.
- **I/O MAPPING:** The controller system inputs and outputs shall be map able. This shall as a minimum enable detector and phase assignments to be changed.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

PORTABLE TRAFFIC SIGNAL SYSTEM

- **VEHICLE ACTUATION:** The system shall be able to run in pre-timed, actuated or semi-actuated modes. This shall be programmable through the keyboard. Each unit (Master and Secondary) shall have a non-intrusive vehicle detector mounted on its mast arm, which shall require no pavement cuts or any connection to the pavement. The detector shall be capable of covering one or more lanes and have a detection range of up to 200 feet for cars and trucks, assuming straight, level pavement. Other optional detection systems shall be compatible with system inputs.
- **PREEMPTION:** The control system shall be able to accommodate the addition of preempt inputs. The preemption programming shall be as typical for permanent traffic signal equipment.
- **TIME BASE COORDINATION:** The controller shall have an internal time clock and internal time base coordination. It shall have the optional capability to coordinate into existing traffic systems.

(d) Wireless Communication/Interconnection

The following shall be the minimum common requirements for the Wireless Transceiver. It shall:

- Operate in license-free, Spread Spectrum bands (902-928 MHz) utilizing Frequency Hopping.
- Be capable of maintaining wireless communication in all types of terrain without direct line of sight.
- Operate multiple user-selectable non-overlapping hopping patterns.
- Be completely configurable via the provided menu driven display/keypad.
- Provide Bi-directional radio transmission with confirmation.
- Real time' data transfer ensuring multiple transfers of data with error checking for live monitoring.
- Have LED indicators for PWR/RF Link Status.
- Have an operating temperature of -40 to +80 degrees C.
- Operate within the full operating voltage ranges of the DC system.
- Programmable RF output levels of 1 mW, 10 mW, 100 mW or 1 Watt c/o supplied operator interface.
- Operate as Master, Remote, or Repeater.
- Have RSSI signal strength indicator LEDS.
- Allow firmware updates c/o industry standard port.

(e) Radio Remote for Flagger or Pilot Car Control:

A hand held remote pendant shall be provided that can be used to increment the signals. Provision shall be provided to prevent the overriding the clearance times. It shall have a display showing the status of the trailer system signal indications. It shall be powered by a standard 12VDC cigarette lighter plug.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

PORTABLE TRAFFIC SIGNAL SYSTEM

(f) Cabinet Requirements:

The radio, monitoring and control equipment shall be enclosed in a weather tight enclosure of NEMA 3R standards. It shall also contain a battery charger (120VAC input) and charge controller. The bottom of the cabinet shall have a spring loaded trap door access hole for running a power cord into the battery charger.

(g) Signals:

The system shall be designed to use LED traffic signal heads. In a fail mode the signal system shall be programmable for flash or steady, and yellow or red color.

(h) Batteries:

The batteries shall be a deep cycle lead acid absorbed glass mat (AGM) type. They shall be hermetically sealed and shall be maintenance free. Batteries shall be housed in enclosure(s) secure from vandalism, theft, and weather. The enclosure(s) shall also keep the batteries securely in place during transport. Battery capacity on the Master and Secondary trailer shall be adequate to allow up to 21 consecutive days of operation without any additional charging.

(i) Solar Charging Option:

Each unit (Master and Secondary) shall have adequate solar charging capacity to insure that each can operate independently of line power or auxiliary charging devices for a minimum of the six best solar months in the 48 contiguous states of the United States. The solar array on each unit shall be capable of tilt adjustment on 2 axis in order to maximize the efficiency of the solar panels. The panels shall be fastened in a secure manner. Panel mounting hardware shall use high security bolt heads. The solar arrays shall be capable of being stowed in a manner so that they are entirely within the boundaries of the framework of the trailer, and minimize wind resistance when the trailer is towed.

(j) Battery Charger:

A 120VAC battery charger shall be provided for the instance when batteries need to be charged from an external source. It shall be rated at a minimum wattage of 360 watts.

(k) Charge Controller:

A charge controller shall be provided for interfacing between the solar panels, the control system, and the batteries. Any combination shall be able to be used simultaneously. It shall be maximum power point tracking, multiple stage and configurable to optimize charge parameters, battery temperature and AGM battery superior charge parameters. The charge controller shall be rated to handle the solar

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

PORTABLE TRAFFIC SIGNAL SYSTEM

system maximum outputs. It shall have current limiting. It shall have a digital display to monitor charge performance.

(I) System Capabilities:

These trailer systems shall be able to be used within larger, compatible, portable traffic equipment and systems. The radio and control system shall be able to work within larger systems that have greater phasing capabilities, more complex deployments and larger power consumption needs such as 5 section head left turn movement, or side street signals and system with longer mast arms.

2. **MAINTENANCE REQUIREMENTS.** The Contractor shall provide the Engineer with the names and telephone numbers of those responsible for maintaining the portable traffic signal system. The Contractor shall have at least one person who can be contacted 24 hours a day, and seven (7) days per week. The Contractor shall keep the portable traffic signal system in good repair at all times. Failure, malfunction, or damage to the system, for any reason, shall require the Contractor to be on site within two (2) hours to expedite the repair, or replacement, and furnish adequate flaggers or other approved means, at the Contractor's expense, to provide a safe means for the control of traffic until the system is put back into service.
3. **MATERIALS AND CONSTRUCTION.** The Portable Traffic Signal System shall be furnished and installed at the location(s) as shown on the plan sheet(s). All materials and labor shall be considered included in the price for the Portable Traffic Signal System. Where specified as "actuated" vehicle detection as described elsewhere in this specification shall be furnished, installed and tested.
4. **METHOD OF MEASUREMENT.** Completed and accepted items Portable Traffic Signal System shall be measured for payment by the number of weeks the system is required and authorized by the Engineer. A "week" is defined as a 7-calendar day period beginning at 12:01 a.m. Monday. Payment for a full week will be made for any portion of a week that the Portable Traffic Signal System is authorized and used for temporary traffic control, but the measurement shall not exceed one per system in any week. When Portable Traffic Signal System is required after the contract time has expired and liquidated damages are being assessed, the Contractor shall furnish such system at no cost to the Department.
5. **BASIS OF PAYMENT.** Work completed and accepted under this item and measured as above will be paid for at the contract unit price bid per week as follows:

Price bid for **Portable Traffic Signal System** including vehicle detection system and associated equipment shall be full compensation for furnishing the equipment; installing and testing the system; maintenance of the equipment during operation; and for all materials, equipment, tools, labor, and incidentals necessary to complete the work.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

PORTABLE TRAFFIC SIGNAL SYSTEM

Payment shall be made under:

Pay Item

Pay Unit

Portable Traffic Signal System - Actuated

Week

ARKANSAS DEPARTMENT OF TRANSPORTATION
SPECIAL PROVISION
JOB A20044
WATER POLLUTION CONTROL

Section 110 of the Standard Specifications for Highway Construction, Edition of 2014 is hereby amended as follows:

The following is added to **Section 110**:

Sedimentation, turbidity, water pollution, and other possible impacts shall be carefully controlled and minimized on this project. A public drinking water protection area is within the job limits. Required actions of the Contractor shall include, but are not limited to, the following:

- **The Contractor shall have absorbents in forms such as booms, pillows, or rolls on the job site capable of absorbing up to 500 gallons of petroleum based liquids. The Contractor shall be prepared at any time to utilize these absorbents immediately as a defense response for hazardous waste spills such as emulsified asphalt products occurring as a result of this project. No work will be permitted to occur on the project unless one of the above referenced absorbents is physically on the project limits.**
- **Emulsified asphalt products shall not be placed when there is any likelihood of adverse weather.** Emulsified asphalt products shall be limited to 1,500 linear feet at any one time.
- No equipment with leaking fluids shall be allowed on the project.
- Storage areas for petroleum and/or chemical products cannot be placed within 500 feet of a stream crossing or as directed by the Engineer. No material shall be wasted or temporarily stockpiled in wetlands, flood plains, recharge areas, or where it can be eroded or washed into waters of the United States.

METHOD OF MEASUREMENT AND BASIS OF PAYMENT: The work involved in complying with the remainder of this Special Provision will not be measured or paid for separately, but will be considered included in the contract unit prices bid for other items of the contract.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. A20044

PRIME CONTRACTOR PERFORMANCE EVALUATION

All projects with a contract bid amount of \$10 million or greater will be evaluated in accordance with the Prime Contractor Performance Report Manual (PCPRM) adopted by the Department on September 30, 2025.

The manual is located on the Construction Contractor Information page on the ARDOT.gov website.

The Engineer will evaluate the contractor using the metrics and at intervals identified in the PCPRM. The evaluation ratings will be used to provide constructive feedback and as a tool to identify areas for improvement. The contractor shall be given opportunity to review and comment on the evaluation as well as the opportunity to appeal the Engineer's rating.

No direct payment will be made for inclusion of the PCPRM in the contract.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SPECIAL PROVISION
LIQUIDATED DAMAGES

As specified in the Contract, liquidated damages for this project will be as shown in the following table:

WORKING DAY PROJECTS

ORIGINAL CONTRACT AMOUNT		
FROM MORE THAN	TO AND INCLUDING	RATE
\$ 0	\$ 100,000	\$ 140
100,000	500,000	400
500,000	1,000,000	660
1,000,000	2,000,000	800
2,000,000	5,000,000	1,380
5,000,000	10,000,000	1,800
10,000,000	15,000,000	2,620
15,000,000	20,000,000	2,720
20,000,000	30,000,000	2,940
30,000,000	-----	3,500

FIXED DATE PROJECTS

ORIGINAL CONTRACT AMOUNT		
FROM MORE THAN	TO AND INCLUDING	RATE
\$ 0	\$ 100,000	\$ 60
100,000	500,000	80
500,000	1,000,000	220
1,000,000	2,000,000	300
2,000,000	5,000,000	420
5,000,000	10,000,000	1,000
10,000,000	15,000,000	1,200
15,000,000	20,000,000	1,300
20,000,000	30,000,000	1,400
30,000,000	-----	1,520

ARKANSAS DEPARTMENT OF TRANSPORTATION

SUPPLEMENTAL SPECIFICATION

CONTRACTOR'S LICENSE

Section 102 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The third paragraph of **Subsection 102.01, Prequalification of Bidders**, is hereby deleted and the following substituted thereof:

The attention of prospective bidders is directed to Ark. Code Ann. §17-25-101 et seq., Act 150 of the 1965 Acts of Arkansas, being an "Act Regulating the Practice of Contracting in the State of Arkansas", and any subsequent amendments made thereto. When the work offered is financed in whole with State funds and is estimated to cost \$50,000 or more, the prospective bidder must show evidence of its license and evidence of registration or license of its subcontractors with the Contractors Licensing Board for the State of Arkansas before being furnished with a proposal form.

The third paragraph of **Subsection 108.01, Subletting of Contract**, is hereby deleted and the following substituted thereof:

It shall be the responsibility of the Contractor to determine that all parties performing work amounting to \$50,000 or more are currently licensed or registered by the Contractors Licensing Board for the State of Arkansas.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
DEPARTMENT NAME CHANGE

All references to the Arkansas State Highway and Transportation Department contained within the Standard Specifications for Highway Construction (Edition of 2014), the Qualified Products List, the Manual of Field Sampling and Testing Procedures, plan sheets, Supplemental Specifications, and all Special Provisions contained in this proposal are hereby deleted and replaced with the title of Arkansas Department of Transportation.

All references to AHTD contained within the Standard Specifications for Highway Construction (Edition of 2014), the Qualified Products List, the Manual of Field Sampling and Testing Procedures, plan sheets, Supplemental Specifications, and all Special Provisions contained in this proposal are hereby deleted and replaced with the abbreviation ARDOT.

All references to the Arkansas State Highway Commission contained within the Standard Specifications for Highway Construction (Edition of 2014), the Qualified Products List, the Manual of Field Sampling and Testing Procedures, the Standard Drawings, plan sheets, Supplemental Specifications, and all Special Provisions contained in this proposal remain in effect.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
ISSUANCE OF PROPOSALS

Section 102 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

Subsection 102.04(j) is hereby deleted and the following is substituted therefore:

(j) If the prospective bidder is the Contractor on a current Contract with the Commission on which Liquidated Damages are being assessed, and there are no pending time extensions warranted to remove the project from Liquidated Damages.

Subsection 102.04(k) is hereby deleted and the following is substituted therefore:

(k) If the prospective bidder has a current Contract in default.

Subsection 102.04(n) is hereby added:

(n) If the prospective bidder has an individual, as an officer/owner/partner of any firm, partnerships or corporation, that has entered into a previous or current contract with the Commission that in the Department's sole discretion, is subject to any of the reasons listed in Subsection 102.04(a)-(m).

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
PREQUALIFICATION OF BIDDERS

Section 102 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The following paragraph has been added to **Subsection 102.01**:

A contractor with common officers/owners/partners of any firm, partnerships, joint ventures, or corporations that is seeking prequalification, has been prequalified, or has entered into a previous or current contract with the Commission may have the prequalification denied, limited, or revoked for the reasons listed in Subsection 102.04(a)-(m).

ARKANSAS DEPARTMENT OF TRANSPORTATION

SUPPLEMENTAL SPECIFICATION

CONTACT INFORMATION FOR MOTORIST DAMAGE CLAIMS

Section 103, AWARD AND EXECUTION OF CONTRACT, of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The following is added as the fourth paragraph of **Subsection 103.05(b), Liability Insurance**:

Prior to beginning construction, the Contractor shall provide the Engineer with the name, phone number and e-mail address for the individual within their organization responsible for submission of claims for damages to motorists' vehicles inside the work zones. This information shall be updated annually or whenever this responsibility changes within the Contractor's organization. The information will be made available to the public on the Department's webpage.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
MAINTENANCE DURING CONSTRUCTION

Division 100 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

Subsection 105.15 is hereby modified as follows:

The first paragraph of **Subsection 105.15** is hereby deleted and the following substituted therefor:

105.15 Maintenance During Construction. The Contractor shall maintain the work during construction and until the project is accepted. For contracts containing a Flexible Beginning of Work special provision, the responsibility for maintenance by the Contractor will begin at the earlier date of the following:

- when the Contractor begins work, or
- on the date of the beginning of time charges in accordance with the Work Order if the Contractor has not commenced work.

This maintenance shall constitute continuous and effective work prosecuted day by day, with adequate equipment and forces, to the end that the roadway or structures are kept in satisfactory condition at all times.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
RESTRAINING CONDITIONS

Section 107 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The following is hereby added after the first bullet of the first paragraph of **Subsection 107.10 Restraining Conditions (a), General**:

- Human remains, burials, and/or associated burial artifacts

The following is hereby added after the second paragraph of **Subsection 107.10 (b), Restraining Conditions Within the Right-of-Way**:

When restraining conditions under (1) and (2) below are encountered, the following provisions should be executed.

(1) If archeological sites and/or historically significant cultural resources are unexpectedly impacted or subsequently discovered during construction, the Contractor shall stop work with no ground-disturbing activities occurring within a two hundred (200)-foot radius of the location of the discovery. The Engineer shall be notified immediately, who will then notify the Environmental Division. A Department staff archeologist will inspect the discovery and determine if the established buffer radius is appropriate. The radius may be decreased or increased based on the nature of the discovery at the discretion of the archeologist. Work in the buffer radius shall not resume until the Environmental Division has provided written notification to the Engineer that construction activities can proceed.

(2) If human remains, burials, and/or associated burial artifacts are encountered during construction, the Contractor shall stop work with no ground-disturbing activities occurring within a two hundred (200)-foot radius of the location of the discovery and the location secured and protected by flagging or fencing. The human remains shall be covered with a canvas tarp and shall not be removed or collected. The Engineer shall be notified immediately, who then will notify the Environmental Division. A Department staff archeologist will inspect the remains and determine if the established buffer is appropriate. The radius may be decreased or increased based on the nature of the discovery at the discretion of the archeologist. The local law enforcement and Chief Medical Examiner will be notified by the Environmental Division. Work in the buffer radius shall not resume until the Environmental Division has provided written notification to the Engineer that construction activities can proceed.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
RESTRAINING CONDITIONS

The following is hereby added after the third sentence of the first paragraph of **Subsection 107.10 (c), Restraining Conditions Outside the Right-of-Way, (2) Non-commercially Operated Site:**

The Contractor shall limit the amount of acres submitted for an off-site location to no more than 10 acres, except for commercial areas, previously approved locations, or where previous ground disturbance exists. If a Contractor requires more than 10 acres for a proposed off-site location, the Contractor may, at no cost to the Department, acquire approval for use of the site from the State Historic Preservation Officer and a qualified archeological consultant.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
WORK ALLOWED PRIOR TO ISSUANCE OF WORK ORDER

Section 108 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

Subsection 108.02(b)(2) is hereby deleted and the following is substituted therefore:

(2) The delivery to the Department for execution of the Contract and bonds properly executed on behalf of the Contractor and surety and the minimum 72 hours advance notice as required above shall constitute the Contractor's authority to begin the following items of work:

- Mobilization;
- Preparation of shop drawings and other required submissions;
- Ordering, fabrication, assembly, and/or stockpiling of materials;
- Driving Test Piling; and
- Contract surveying, when Roadway and/or Bridge Construction Control is included in the Contract.
- Erection of advance warning signs.
- Installation of netting on structures to prevent nesting of migratory birds in accordance with applicable Special Provisions (if included in the Contract).
- Set up, installation, and testing of Automated Work Zone Information Systems (if included in the Contract).
- Off-site area approval process per Section 107.10(c).

Such advance work shall be subject to the Contractor's assumption of the risk of cancellation of the award and the following:

- The Contractor shall, on commencing such operations, take all precautions required for public safety and shall observe all the provisions in the Contract;
- In the event of cancellation of the award, the Contractor shall at Contractor expense do such work as necessary to leave the site in a neat condition to the satisfaction of the Engineer;
- In the event of cancellation of the award, all work performed shall be deemed to be at the Contractor's expense; and
- All work done under this subsection in accordance with the Contract before its execution by the Commission will, when the Contract is executed, be considered authorized work and will be paid for as provided in the Contract.

Unless otherwise notified in writing, no time will be assessed for work performed prior to the effective date of a Work Order.

No payments will be made prior to the date established by the Engineer under Subsection 109.07, which date will be after the effective date of a Work Order.

The Contractor shall not be entitled to any additional compensation or an extension of time for any delay, hindrance, or interference caused by or attributable to commencement of work before the effective date of a Work Order.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SUPPLEMENTAL SPECIFICATION

WORK ORDER FOR FIXED COMPLETION DATE CONTRACTS

Section 108, Prosecution and Progress, of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

Subsection 108.02(b)(4) a. is hereby deleted, and the following is substituted therefor:

a. Fixed Completion Date Contract. Unless the Contractor is otherwise advised in writing, the Work Order for a fixed completion date contract shall become effective on the second business day following the execution of the Contract by the Department. (Example: If the contract is executed on Wednesday, March 1, the Work Order will be effective on Friday, March 3.) Should the effective date fall on Saturday, Sunday, legal holiday designated in Subsection 101.01(c), Monday following a holiday on Sunday, or Friday preceding a holiday on Saturday, the effective date shall still be on the second business day. The written Work Order from the Engineer will follow with the effective date being as specified.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
AGGREGATE BASE COURSE

Section 303 of the Standard Specifications for Highway Construction, Edition 2014, is hereby amended as follows:

The second paragraph of **Subsection 303.02, Materials** is hereby deleted and the following substituted therefor:

The Contractor shall have the option of using any higher numbered class Aggregate Base Course than that specified, provided that payment will be for the class specified. Acceptance criteria shall be for the class specified. Different classes of Aggregate Base Course shall not be mixed in the same location.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SUPPLEMENTAL SPECIFICATION

QUALITY CONTROL AND ACCEPTANCE

Division 300 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The first sentence of the third paragraph **Subsection 306.03 Acceptance Testing** is hereby deleted and the following substituted therefor:

If the material being furnished is crushed stone the Department will furnish the PL, LL, and PI for the material, further tests for PL, LL, and PI are waived.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
CEMENT TREATED BASE COURSE

Division 300 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The first and second paragraph of **Subsection 307.03(b), Cement**, are hereby deleted and the following substituted therefor:

(b) Cement. Portland cement, blended cement, fly ash, and slag cement shall be from sources that are listed on the Department's Qualified Products List (QPL) in Division 500 and that have executed a certification agreement with the Department.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
CEMENT STABILIZED CRUSHED STONE BASE COURSE

Division 300 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The first and second paragraph of **Subsection 308.03(b), Cement**, are hereby deleted and the following substituted therefor:

(b) Cement. Portland cement, blended cement, fly ash, and slag cement shall be from sources that are listed on the Department's Qualified Products List (QPL) in Division 500 and that have executed a certification agreement with the Department.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
TACK COATS

Division 400 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

Section 401, Prime and Tack Coats and Emulsified Asphalt in Base Course, is hereby modified as follows:

The first sentence of **Subsection 401.03(a)** is hereby deleted and the following substituted therefore:

The surface to be treated with prime or tack coat shall be cleaned of dust, dirt, and loose or foreign material by sweeping with mechanical brooms immediately preceding the application of the prime or tack coat.

Third sentence of **Subsection 401.03(c)** is hereby deleted and the following is substituted therefore:

No dilution beyond that which is part of the emulsification process is permitted. The tack coat shall not be diluted, cut, or otherwise thinned after receipt from the manufacturer's facility.

The fifth sentence of **Subsection 401.03(c)** is hereby deleted and the following substituted therefore:

The rate of application shall be from 0.03 gallon to 0.05 gallon per square yard of residual asphalt as designated by the Engineer.

Section 410, Construction Requirements and Acceptance of Asphalt Concrete Plant Mix Courses, is hereby modified as follows:

The sixth paragraph of **Subsection 410.05** is hereby deleted and the following substituted therefore:

For foreign material, or when the time lapse between courses is more than 8 hours, the earlier course shall be cleaned and given a tack coat before placing the succeeding course. When directed, the tack coat shall be applied and paid for under Section 401. If directed by the Engineer, a tack coat shall be used even though the elapsed time has been less than 8 hours.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
DESIGN AND QUALITY CONTROL OF ASPHALT MIXTURES

Division 400 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

Section 404, QUALITY CONTROL OF ASPHALT MIXTURES, is hereby modified as follows:

The fifth sentence of the second paragraph of **Subsection 404.01, Design of Asphalt Mixtures, (a) General**, is hereby deleted and the following substituted therefor:

A mix design that has not been produced on an ARDOT project in the last two years is inactive. The Contractor may submit a passing field verification test for the inactive asphalt mix design to the Materials Division to be reactivated. Asphalt mix designs with an expiration date may remain in production if they are not inactive.

The third through fifth paragraphs of **Subsection 404.04, Quality Control of Asphalt Mixtures**, are hereby deleted and the following substituted therefor:

The accepted mix design shall be field verified by the Contractor at the start of mix production or after an interruption of more than 120 calendar days. Production of Department approved mix designs for placement on non-ARDOT projects may be used for mix verification. The Contractor shall be allowed two attempts to verify the mix design if being placed on an ARDOT project and three attempts to verify the mix design if being placed on a non-ARDOT project. The Contractor shall notify the Engineer sufficiently in advance for Department personnel to witness all testing of this production and shall provide copies of all test results to the Department.

Verification will begin with testing the plant produced mix using the aggregate proportions and asphalt binder content shown on the accepted mix design. After the first attempt of verification of the initial design, the Contractor may elect to adjust aggregate proportions to vary the accepted mix design gradations and bring the mix properties near the center of the compliance limits. If the mix is in subplot rejection, all future attempts will only be allowed on non-ARDOT projects.

The mix will be verified if the test values for air voids, asphalt binder content, and VMA are within the compliance limits shown in Table 410-1, and when the accepted mix design has been produced within the gradation tolerances according to Subsection 404.04.

The Contractor may request a one-time field mix design be accepted by the Engineer of Materials. The Contractor will be notified in writing if the field mix design is accepted. A field mix design allows the Contractor to use the adjusted aggregate proportions for future verification of the mix design. Cold feed adjustments will be allowed to both the initial mix design and field mix design if they do not exceed more than 10% for any single cold feed or 20% overall from the initial mix design. No individual cold feed will be allowed to be eliminated by such changes. Gradation tolerances will be based off the initial job mix formula. All cold feed adjustments exceeding the limits outlined above will require a new mix design.

Once verified, the asphalt binder content shall be adjusted at the plant to obtain the optimum asphalt binder content shown on the mix design during production based on the lot average. At no time shall the asphalt binder content be adjusted in a manner to produce an asphalt binder content lower

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
DESIGN AND QUALITY CONTROL OF ASPHALT MIXTURES

than the design value. Adjustments to the asphalt binder content are not allowed for control of any volumetric property. All changes to be made to the asphalt binder content must first be reported to the Engineer. If adjustments do not give the intended result, production shall be stopped, and the asphalt plant and equipment shall be recalibrated and adjusted so the asphalt binder content can be successfully obtained.

The test method ARDOT 461, (NOTE 3), and (NOTE 4) in the table of the tenth paragraph of **Subsection 404.04, Quality Control of Asphalt Mixtures**, are hereby deleted.

The thirteenth and fourteenth paragraphs of **Subsection 404.04, Quality Control of Asphalt Mixtures, NOTE 3 and NOTE 4** are hereby deleted.

The eighteenth paragraph of **Subsection 404.04, Quality Control of Asphalt Mixtures**, is hereby deleted.

The fourth and fifth sentences in the nineteenth paragraph of **Subsection 404.04, Quality Control of Asphalt Mixtures**, are hereby deleted and the following substituted therefor:

Individual aggregate cold feeds should be adjusted to bring the mix design properties near the center of compliance limits. If excessive changes are required, production will be suspended, and a new mix design shall be developed according to the applicable specifications. Excessive changes are cold feed adjustments that exceed more than 10% for any single cold feed change or 20% overall from the initial mix design. No individual cold feed will be allowed to be eliminated by such changes. All cold feed adjustments exceeding the limits outlined above will require a new mix design.

Section 410, CONSTRUCTION REQUIREMENTS AND ACCEPTANCE OF ASPHALT CONCRETE PLANT MIX COURSES, is hereby modified as follows:

The first through third sentences in the first paragraph of **Subsection 410.09(a), General**, are hereby deleted and the following is substituted therefor:

The accepted mix design shall be verified by the Contractor at the start of mix production for that design or after an interruption of more than 120 calendar days. A maximum of 200 tons (200 metric tons) of materials may be placed on the roadway during the verification process. If the mix produced does not verify the mix design, the material placed on the roadway shall be declared a partial lot. If all verification attempts have been exhausted, a new mix design shall be required.

Section 411, ASPHALT CONCRETE COLD PLANT MIX, is hereby modified as follows:

The third sentence of **Subsection 411.05 (b), Acceptance**, is hereby amended and the following is substituted therefor:

The accepted mix design shall be field verified by the Contractor at the start of mix production or after an interruption of more than 120 calendar days.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
PERCENT AIR VOIDS FOR ACHM MIX DESIGNS

Division 400 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The fourth sentence of the first paragraph of **Subsection 404.01(b), Design Requirements**, is hereby deleted and the following substituted therefor:

The optimum asphalt content is the asphalt binder content at 3.5% air voids for all asphalt mixtures.

The first bullet of the first paragraph of **Subsection 404.01(b), Design Requirements**, is hereby deleted and the following substituted therefor:

- All binder grades for all asphalt mixtures will be designed using 3.5% air voids.

The second paragraph of **Subsection 404.01(b), Design Requirements**, is hereby deleted and substituted therefor:

All Asphalt Base and Binder Courses will be designed at a Ndes of 75 gyrations. All Asphalt Surface Courses will be designed at a Ndes of 60 gyrations.

The second sentence of the second paragraph of **Subsection 404.04, Quality Control of Asphalt Mixtures**, is hereby deleted and the following substituted therefor:

Adjustments to the accepted mix design to conform to actual production values without redesign of the mixture shall be based on production of the mixture at a target value of 3.5% air voids in all asphalt mixture specimens and an asphalt binder content not less than that specified in the accepted mix design.

The table in the tenth paragraph of **Subsection 404.04, Quality Control of Asphalt Mixture**, is hereby amended by deleting the test method ARDOT 449/449A, AASHTO T 308, and Note 4 for asphalt binder content determination and substituting ARDOT TM 483, "Test Method for Determination of Binder Content and Development of Binder and Aggregate Correction Factors by Ignition Method."

The following is hereby added after the tenth paragraph of **Subsection 404.04, Quality Control of Asphalt Mixtures**:

Ignition Ovens (Single, Multiple, and Replacement). A single ignition oven shall be used for all ignition-oven determinations performed for Acceptance on a project unless otherwise approved in writing by the Engineer.

Ignition oven requirements apply only to mixtures for which asphalt binder content or gradation is determined using ignition methods for Acceptance.

A correction factor for determining asphalt binder content and gradation using the ignition oven shall be established in accordance with ARDOT TM 483. A separate correction factor shall be developed for each JMF and for each ignition oven used. The correction factor shall be reestablished at a minimum frequency of once every 12 months.

Documentation of the established correction factor shall be submitted to the Engineer prior to the start of production. The Engineer shall be given the opportunity to witness the correction factor determination process.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
PERCENT AIR VOIDS FOR ACHM MIX DESIGNS

When the mass of a sample exceeds the capacity of the ignition oven or basket, the sample shall be reduced into multiple test portions using approved splitting procedures and tested in separate ignition-oven determinations using the same approved ignition oven. Asphalt binder content results shall be combined on a mass-weighted basis, and aggregate shall be recombined for gradation determinations.

Use of More than One Ignition Oven (Prior Approval). The use of more than one ignition oven may be approved in writing by the Engineer prior to the start of production for projects with high production rates, extended paving durations, or multiple simultaneous production operations. When more than one ignition oven is approved, the following shall apply:

1. Each ignition oven shall be identified and approved in writing by the Engineer prior to use.
2. A separate correction factor shall be established and documented for each approved ignition oven in accordance with ARDOT TM 483 prior to use for project testing.
3. Each approved ignition oven shall be assigned to a specific plant, production line, or testing stream and shall not be alternated based on test results.
4. Acceptance testing shall be performed using the assigned ignition oven for the applicable production stream.
5. Selection between approved ignition ovens based on test results shall not be permitted.
6. Changes to approved ignition oven assignments shall be made only with prior written approval from the Engineer.

Replacement Ignition Oven During Production. The use of a replacement ignition oven during production may be approved in writing by the Engineer only in the event of equipment failure or other unavoidable circumstances. When a replacement ignition oven is approved, the following shall apply:

1. Ignition-oven determinations intended for Acceptance shall be suspended until a correction factor is established for the replacement ignition oven.
2. A correction factor shall be established and documented for the replacement ignition oven in accordance with ARDOT TM 483 before results from the replacement ignition oven are used for Acceptance or for Department testing.
3. Once approved, the replacement ignition oven shall be used for the remainder of the project unless otherwise approved in writing by the Engineer.

Bulk Specific Gravity. When AASHTO T 166 is determined by the Department to be unsuitable, bulk specific gravity shall be determined using an automatic vacuum sealing system in accordance with AASHTO T 331. Use of AASHTO T 331 shall be permitted only when directed by the Department. Suitability shall be based on the ability to obtain reliable results in accordance with the applicable test method requirements. The vacuum sealing system shall be approved by the Engineer prior to use.

AASHTO T 275, Bulk Specific Gravity of Compacted Asphalt Mixtures Using Paraffin-Coated Specimens, shall not be permitted for use in mixture design or Acceptance testing.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
PERCENT AIR VOIDS FOR ACHM MIX DESIGNS

The Contractor shall furnish the Department with access to a compliant vacuum sealing system for testing when bulk specific gravity is required to be determined in accordance with AASHTO T 331, when specified by the Department. This requirement may be satisfied through the Contractor's primary laboratory or by providing additional approved equipment as necessary to ensure that testing is performed in accordance with the specified method. The Department may also perform testing using Department-owned or independently furnished equipment.

Table 405-1 of **Subsection 405.03, Materials** is hereby deleted and the following substituted therefor:

Table 405-1
Design Requirements for Asphalt Concrete Hot/Warm Mix Base Course (1½")

Control Points							
Sieve	Percent Passing (%)						
1½"	100						
1"	90 - 100						
¾"	90 max.						
No. 4	-						
No. 8	15 - 41						
No. 16	-						
No. 30	-						
No. 50	-						
No. 200	0 - 6						
Asphalt Binder Content	Design Value						
% Air Voids	3.5						
% VMA	11.5 - 13.0						
Minimum Water Sensitivity Ratio	80						
% Anti-strip	As Required						
Fines to Asphalt Ratio*	0.6 - 1.4						
Wheel Tracking Test (8000 cycles, 100 psi, 64°C)	<table> <tr> <th><u>Design PG Grade</u></th><th><u>Maximum Rut</u></th></tr> <tr> <td>64-22 or 67-22</td><td>0.315 in. (8.000 mm)</td></tr> <tr> <td>70-22 or 76-22</td><td>0.197 in. (5.000 mm)</td></tr> </table>	<u>Design PG Grade</u>	<u>Maximum Rut</u>	64-22 or 67-22	0.315 in. (8.000 mm)	70-22 or 76-22	0.197 in. (5.000 mm)
<u>Design PG Grade</u>	<u>Maximum Rut</u>						
64-22 or 67-22	0.315 in. (8.000 mm)						
70-22 or 76-22	0.197 in. (5.000 mm)						

*Fines to asphalt ratio shall be defined as the percent materials passing the No. 200 sieve (expressed as a percent of total aggregate weight) divided by the effective asphalt binder content.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
PERCENT AIR VOIDS FOR ACHM MIX DESIGNS

Table 406-1 of **Subsection 406.04, Construction Requirements and Acceptance**, is hereby deleted and the following substituted therefor:

Table 406-1
Design Requirements for Asphalt Concrete Hot/Warm Mix Binder Course (1")

Control Points	
Sieve	Percent Passing (%)
1½"	100
1"	90 - 100
¾"	90 max.
No. 4	-
No. 8	19 - 45
No. 16	-
No. 30	-
No. 50	-
No. 200	1 - 7
Asphalt Binder Content	Design Value
% Air Voids	3.5
% VMA	12.5 - 14.0
Minimum Water Sensitivity Ratio	80
% Anti-strip	As Required
Fines to Asphalt Ratio*	0.6 - 1.4
Wheel Tracking Test	<u>Design PG Grade</u> <u>Maximum Rut</u>
(8000 cycles, 100 psi, 64°C)	64-22 or 67-22 0.315 in. (8.000 mm)
	70-22 or 76-22 0.197 in. (5.000 mm)

*Fines to asphalt ratio shall be defined as the percent materials passing the No. 200 sieve (expressed as a percent of total aggregate weight) divided by the effective asphalt binder content.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
PERCENT AIR VOIDS FOR ACHM MIX DESIGNS

Table 407-1 and Table 407-2 of **Subsection 407.04, Construction Requirements and Acceptance**, are hereby deleted and the following substituted therefor:

Table 407-1
Design Requirements for Asphalt Concrete Hot/Warm Mix Surface Course (1/2")

Control Points	
Sieve	Percent Passing (%)
3/4"	100
1/2"	90 - 100
3/8"	90 max.
No. 8	28 - 58
No. 16	-
No. 30	-
No. 50	-
No. 200	3 - 7
Asphalt Binder Content	Design Value
% Air Voids	3.5
% VMA	14.5 - 16.0
Minimum Water Sensitivity Ratio	80.0
% Anti-strip	As Required
Fines to Asphalt Ratio*	0.6 - 1.2
Wheel Tracking Test	<u>Design PG Grade</u>
(8000 cycles, 100 psi, 64°C)	64-22 or 67-22
	70-22 or 76-22
	<u>Maximum Rut</u>
	0.315 in. (8.000 mm)
	0.197 in. (5.000 mm)

*Fines to asphalt ratio shall be defined as the percent materials passing the No. 200 sieve (expressed as a percent of total aggregate weight) divided by the effective asphalt binder content.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
PERCENT AIR VOIDS FOR ACHM MIX DESIGNS

Table 407-2

Design Requirements for Asphalt Concrete Hot Mix Surface Course (3/8")

Control Points	
Sieve	Percent Passing (%)
1/2"	100
3/8"	90 - 100
No. 4	90 max.
No. 8	32 - 67
No. 16	-
No. 30	-
No. 50	-
No. 200	3 - 7
Asphalt Binder Content	Design Value
% Air Voids	3.5
% VMA	15.5 - 17.0
Minimum Water Sensitivity Ratio	80.0
% Anti-strip	As Required
Fines to Asphalt Ratio*	0.6 - 1.4
Wheel Tracking Test	<u>Design PG Grade</u>
(8000 cycles, 100 psi, 64°C)	64-22 or 67-22
	70-22 or 76-22
	<u>Maximum Rut</u>
	0.315 in. (8.000 mm)
	0.197 in. (5.000 mm)

*Fines to asphalt ratio shall be defined as the percent materials passing the No. 200 sieve (expressed as a percent of total aggregate weight) divided by the effective asphalt binder content.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
PERCENT AIR VOIDS FOR ACHM MIX DESIGNS

The Table 410-1 in **Subsection 410.09(b), Acceptance of the Pavement**, is hereby amended as follows:

TABLE 410-1
COMPLIANCE, PRICE REDUCTION AND REJECTION LIMITS FOR ASPHALT COURSES

Property	Compliance Limits	Price Reduction Limits	Lot Rejection Limits	Sublot Rejection Limits
Asphalt Binder Content	±0.3 from mix design value	more than ±0.3 from mix design value	more than ±0.6 from mix design value	±0.8 from mix design value
Air voids (AV)	2.5% to 4.5%	1.9% to 2.4% 4.6% to 5.0%	1.8% or less 5.1% or more	1.4% or less 5.6% or more
Voids in Mineral Aggregate (VMA)*				
Asphalt Base Course (1½")	11.0% to 13.5%	10.5% to 10.9% 13.6% to 14.0%	10.4% or less 14.1% or more	9.9% or less 14.6% or more
Asphalt Binder Course (1")	12.0% to 14.5%	11.5% to 11.9% 14.6% to 15.0%	11.4% to less 15.1 or more	10.9% or less 15.6% or more
Asphalt Surface Course (1/2")	14.0% to 16.5%	13.5% to 13.9% 16.6% to 17.0%	13.4% or less 17.1% or more	12.9% or less 17.6% or more
Asphalt Surface Course (3/8")	15.0% to 17.5%	14.5% to 14.9% 17.6% to 18.0%	14.4% or less 18.1% or more	13.9% or less 18.6% or more
Density (% of theoretical)	92.0% to 97.0%	91.0% to 91.9% 97.1 to 98.0%	90.9% or less 98.1% or more	89.9% or less** 99.1% or more
Density (% of theoretical) where minimum specified is 90.0%	90.0% to 97.0%	89.0% to 89.9% 97.1% to 98.0%	88.9% or less 98.1% or more	87.9% or less** 99.1% or more

*The values for VMA_(actual) shall be determined by calculating the VMA_(effective) and reducing it by the correction factor shown on the mix design.

**Subject to further evaluation, see text.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SUPPLEMENTAL SPECIFICATION

LIQUID ANTI-STRIP ADDITIVE

Division 400 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

Section 404, DESIGN AND QUALITY CONTROL OF ASPHALT MIXTURES, is hereby modified as follows:

The following is added as the last bullet following the first paragraph of **Subsection 404.01(b), Design Requirements**:

- All ACHM mixes must contain a liquid, anti-strip additive.

Section 409, MATERIALS AND EQUIPMENT FOR ASPHALT CONCRETE PLANT MIX COURSES, is hereby modified as follows:

The second paragraph of **Subsection 409.02 Asphalt Binder** is hereby deleted and the following substituted therefor:

The asphalt binder for all Asphalt Concrete Hot Mixes shall contain a heat-stable, liquid anti-strip additive. The additive shall be furnished from the Qualified Products List. The additive shall not harm the completed bituminous concrete mixture and must be compatible with the aggregate and asphalt binder supplied for the project. The anti-strip additive shall be added either by an in-line blending process just before introduction of the asphalt binder to the mixer or by blending with the asphalt binder at the asphalt binder terminal. If blended at the terminal, the bill of lading accompanying the load being delivered to the hot mix asphalt plant shall include the anti-strip manufacturer's name, product name, and quantity of all anti-strip additive included in the load.

The liquid anti-strip additive shall be added at rates as indicated below:

- For ACHM mixes where the use of an anti-strip additive is required as determined by the laboratory analysis and mix design procedures, the anti-strip additive shall be added at the rate of 0.5% to 0.75% (0.05% to 0.10% for organosilane based materials) by weight of asphalt binder as determined by the laboratory analysis and laboratory mix design procedures.
- For all other mixes, the manufacturer's recommended dosage of the additive shall be used, but the rate of liquid anti-strip additive shall not be less than 0.25% (0.05% for organosilane based materials) by weight of the asphalt binder.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SUPPLEMENTAL SPECIFICATION

TRACKLESS TACK

Sections 401 and 403 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The following is hereby added after the second sentence of **Subsection 401.02 Materials:**

Trackless Tack meeting the requirements of this supplemental specification may be used as Tack Coat at no additional cost to the Department.

The following is hereby added after the fifth sentence of **Subsection 401.03(c), Application of Tack Coat:**

When Trackless Tack is used, the Contractor shall follow the manufacturer's recommendations for storage, application temperature, and application rate.

The following is hereby added as the second paragraph of **Subsection 401.06, Basis of Payment:**

If the Contractor elects to use Trackless Tack in lieu of Tack Coat, the application and payment for the material used will be measured and paid for at the contract unit price bid for Tack Coat per gallon (liter).

The following is hereby added after the second sentence of the first paragraph **Subsection 403.03, Asphalt Materials:**

The manufacturer shall submit certified test results for Trackless Tack to the Engineer.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SUPPLEMENTAL SPECIFICATION

TRACKLESS TACK

The following is hereby added as **Subsection 403.03 (g), Trackless Tack:**

Trackless tack shall be an anionic or cationic asphalt emulsion conforming to the requirements below:

	Test Method	Min	Max
Viscosity, Saybolt Furol at 25°C SFS	AASHTO T59	20	150
Storage stability test, 24-h, %	AASHTO T59		1
Sieve test, %	AASHTO T59		0.3
Residue by distillation, %	AASHTO T59	50	
Tests on residue from distillation:			
Penetration, 25°C, 100 g, 5 s	AASHTO T59		20
*Solubility %	AASHTO T44	97.5	
*Ash Content	AASHTO T111		1
Softening Point °C	AASHTO T53	65	

*Ash Content or Solubility may be used for testing purposes of the residue from distillation.

ARKANSAS DEPARTMENT OF TRANSPORTATION**SUPPLEMENTAL SPECIFICATION****DESIGN OF ASPHALT MIXTURES**

Section 400 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The following is added after the first sentence of paragraph 3 **Subsection 404.01 Design of Asphalt Mixtures. (b) Design Requirements:**

Any use of recycled engine oil bottoms (REOB) or other engine oil derivatives in the manufacture or modification of a binder are strictly prohibited. Ground Tire Rubber (GTR) may be added to asphalt binder with blending of GTR into asphalt occurring only at the asphalt terminal. GTR shall be Class 80-1 ground tire rubber as defined by ASTM D5603.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
ASPHALT LABORATORY FACILITY

Division 400 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

Subsection 409.03(h), Plant Inspection, is hereby deleted and the following substituted therefor:

(h) Plant Inspection. The Engineer shall have access to all parts of the plant.

The Contractor shall provide and maintain a laboratory facility for the exclusive use of the Engineer. This facility shall be located at the plant site. The dimensions and other requirements specified herein are minimums. The facility may be built by the Contractor for the specific purposes stated. Portable structures used as lab facilities must be anchored to the ground and have adequate reinforcement to the floor to provide stability for lab equipment. It is not intended, however, to preclude the use of commercially built trailers or prefabricated buildings that may deviate in minor dimension or detail from the requirements listed but may in some features exceed these requirements and in all major respects be entirely suitable for the purpose intended. The Contractor may furnish, in lieu of a separate building, a facility having sufficient space in a building, parts of which are used for other purposes, provided that the facility furnished meets all other requirements of this subsection; is physically separated from the remainder of the building; and has an outside entrance with unrestricted access allowed and reserved for the exclusive use of the Engineer. Adequate space shall be provided for parking of at least three Department vehicles in the vicinity of the facility. The Engineer will determine the suitability of any facility furnished.

General requirements for the laboratory facility are:

- Minimum working laboratory space of 380 square feet (35.3 sq m) for building widths between 8' to 12' (2.4 to 3.7 m) or 208 square feet (19.3 sq m) with a width of 12' (3.7 m) or greater.
- Minimum designated office space of 30 square feet (2.8 sq m) shall be included in addition to the laboratory square footage.
- A ceiling height of 8' (2.4 m) or greater.
- A desk or table approximately 24" x 36" (600 mm x 900 mm), with at least two drawers, each approximately 13" x 13" x 18" (330 mm x 330 mm x 450 mm) for storing records and at least three office style rolling chairs.
- At least one door with a substantial lock and all keys placed in the possession of the Engineer. The door must be a minimum of 36" (900 mm) wide. A second entry door at the end of trailers that are greater than 30' (9.1 m) in length will be required for safety reasons.
- Access to a well-maintained restroom, with a functioning sink, within reasonable proximity to the Department laboratory facility. Portable restrooms are not acceptable.
- Floored, weatherproof, and reasonably dustproof.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
ASPHALT LABORATORY FACILITY

- Level and stable with substantial/durable structure capable of supporting required laboratory equipment. Movement in the lab shall not affect testing operations such as scale readings, etc.
- At least two glazed screened windows capable of being opened and locked only from the inside.
- Basic utility services shall be provided year-round as long as the plant is listed on the QPL. If utility services to the Department lab are voluntarily suspended at any time, the plant may be removed from the QPL.
- Equip the lab with heating and air conditioning units that maintain the ambient air temperature between 65 °F and 80 °F (18 °C and 27°C). The lab must be climate-controlled year-round.
- A work counter approximately 30" to 36" (760 to 900 mm) high with a minimum depth of 30" (760 mm). The countertop shall be metal capped with a rolled back edge of 2" (50 mm) if adjacent to the wall or other comparable durable surface. Total length of the work counter shall be approximately 35' (10.7 m) with a minimum of 12' (3.7 m) of counter length 36" (900 mm) deep.
- A minimum of 54" (1370 mm) width between parallel work counters.
- Adequate electric lights suitable for the purposes intended. At least one power outlet per every four feet of counter. At least two power outlets shall provide 220 VAC.
- An exhaust outlet with at least 3" (76 mm) inside diameter no farther than 8' (2.4 m) from the ignition oven shall be included near one of the 220 VAC outlets. Provide a surface for the ignition oven that is level, sturdy, and fireproof with at least 6" (152 mm) of clearance between the furnace and other vertical surfaces. The exhaust fumes exiting the furnace exhaust port may reach 270 °C (518 °F).
- An exhaust fan shall be installed over the equipment clean up area. The exhaust fan shall be equipped with a rheostat control and capable of exhausting in one minute a volume of air equal to the volume of the entire laboratory. The exhaust fan shall be maintained operational.
- A sink, approximately 24" (610 mm) square with a minimum depth of 9" (230 mm) with an outside drain.
- A clean water supply providing a minimum of 50 gallons (200 liters) storage capacity (or connected to a public or private water system), discharging through a faucet above the sink. A thermostat controlled hot water supply shall be provided to the laboratory sink.
- Adequate shelves and/or cabinets for storage of testing equipment that do not impede the operation of testing equipment.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
ASPHALT LABORATORY FACILITY

- A storage area for storing nuclear equipment, complete with a substantial lock and all keys to this area placed in the possession of the Engineer.
- At least one Type ABC fire extinguisher (10-pound size minimum) with up-to-date inspection tag per 300 square feet of building.
- A local access touchtone telephone line (with access to toll free telephone numbers but otherwise blocked for outgoing long-distance calls), with a landline modular jack and touchtone telephone, shall be provided in the laboratory facility for use by Department personnel.
- Reliable Broadband Internet Service shall be provided.

The Broadband Internet Service shall be provided with an Internet Protocol (IP) address which is reachable on the global Internet (public) and which is permanently assigned (static). The Contractor is not required to provide this service if an IP address which is both static and public is not available.

If this service is not available at the beginning of a project but becomes available during the life of the project, the Contractor shall provide the service immediately from the date of availability.

The data transfer rate shall be 3 megabits per second (Mbps) download and 500 kilobits per second (kbps) upload, or higher, with latency not to exceed 150 milliseconds. If the Broadband Internet Service meets all of the requirements of this specification except for the data transfer rate and/or latency, then the best performing available connection shall be provided. The Broadband Internet Service shall be provided with equipment providing a minimum of one Ethernet port.

Prior to the selection of the Broadband Internet Service provider, the Contractor shall submit to the Resident Engineer, in writing, the proposed method for providing Broadband Internet Service. The Resident Engineer shall review this submittal and respond in writing regarding the acceptability of the proposed method.

Adequate maintenance of the laboratory facility shall be required for plant inclusion on the QPL and will be included as part of the annual ACHM plant inspection. Maintenance shall include, but is not limited to, HVAC and electrical systems, and plumbing. The Resident Engineer may determine a lab is in reasonable compliance with this specification if all required testing can be accomplished with reasonable ease by the Construction Materials Inspector.

The requirements of this Supplemental Specification shall be implemented to receive the next scheduled ACHM Plant Certification. If the requirements are not met and the Resident Engineer determines the laboratory is not within reasonable compliance an ACHM Plant Certification will not be provided until all requirements are fulfilled and/or the Resident Engineer is satisfied with the conditions of the facilities.

The field laboratory for asphalt mixing plants and the utility services provided will not be paid for directly but will be considered a part of the asphalt mixing plant.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SUPPLEMENTAL SPECIFICATION

**CONSTRUCTION REQUIREMENTS AND ACCEPTANCE OF
ASPHALT CONCRETE PLANT MIX COURSES**

Section 410, Construction Requirements and Acceptance of Asphalt Concrete Plant Mix Courses, of the Standard Specifications for Highway Construction, Edition of 2014, is hereby modified as follows:

Subsection 410.10 Incentives is hereby deleted.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SUPPLEMENTAL SPECIFICATION

DEVICES FOR MEASURING DENSITY FOR ROLLING PATTERNS

Section 410 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The fourth sentence of the first paragraph of **Subsection 410.08, Rolling and Density Requirements and Joints**, is hereby deleted and the following substituted therefor:

The Engineer will observe the Contractor's use of an electromagnetic surface contact device that meets ASTM D7113/D7113M or the use of a nuclear density gauge to verify that the maximum densities possible are obtained.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
EVALUATION OF ACHM SUBLOT REPLACEMENT MATERIAL

Section 410 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The following shall be added to the second to the last paragraph of **Subsection 410.09 (a)**
General:

If the material used to replace unacceptable material is a different mix design from what was originally placed, the remaining material in the lot and the replacement material shall both be evaluated as separate partial lots.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
RECYCLED ASPHALT PAVEMENT

Division 400 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The fourth paragraph of **Subsection 416.03, Materials and Composition**, is hereby deleted and the following substituted therefor:

To ensure the “production” stockpile is distinguishable to anyone involved in the production of asphalt at the plant and no “unprocessed” materials are introduced into the process of ACHM mix manufacturing, the following shall be required for the use of Recycled Asphalt Pavement (RAP):

- RAP stockpiles should have only binder covered aggregates and therefore, there shall be no virgin aggregate or deleterious materials present in any RAP stockpile. Uncoated aggregate from asphalt plant produced material shall not be considered virgin aggregate as it applies to RAP. Plant startup and shut down materials will be considered binder covered and are allowed.
- Unprocessed RAP and processed RAP stockpiles shall be separated by distance and each stockpile signed accordingly.
- Only processed RAP shall be introduced into asphalt mixes. Processed is defined as efforts to create a uniform stockpile of material and may include, but is not limited to, crushing and/or fractionating. Use of the scalper screen on the plant does not define processed RAP.
- Processed RAP stockpiles shall be of adequate size for multiple operational days of asphalt mix production at the plant’s maximum production rate. Processed RAP must be stockpiled before use in plant production. Processed RAP may not be taken from underneath the crusher and placed directly into the cold feed bins. If the crusher is feeding the processed stockpile, the loader must load the cold feed bins from the opposite end of the processed stockpile.

Quality control testing for asphalt binder content and gradation of RAP shall be the contractor’s responsibility and conducted as follows:

- Tested as part of the field verification process. Field verification test results may be transferred from another ARDOT job given they are from the same mix design and were completed within 120 days of the current job’s field verification process.
- Minimum of one set of tests per job for jobs that contain at least 1,000 tons of ACHM.
- One set of tests for every 10,000 tons of ACHM produced.
- The first tests on the job must be performed within the first 3 days of production on the job.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
RECYCLED ASPHALT PAVEMENT

The Contractor has the option of quality control testing while the processed stockpile is being built in lieu of testing during production. Quality control testing for asphalt binder content and gradation of RAP shall be the Contractor's responsibility and conducted as follows:

- Tested as part of the field verification process. Field verification test results may be transferred from another ARDOT job given they are from the same mix design and were completed within 120 days of the current job's field verification process.
- One set of tests for every 1,500 tons of RAP produced for each stockpile.
- The quantity of RAP being placed in the processed stockpile must be tracked.

The Contractor shall pick only one option of quality control method per processed RAP stockpile. The Engineer shall be given the opportunity to witness all testing. Test results shall be submitted to the Engineer by the next business day. The Contractor shall keep a logbook to track the consistency of the asphalt binder content and gradation.

If testing determines the properties of the RAP have deviated significantly from the mix design, as determined by the Engineer, changes to virgin binder content and/or aggregate proportions will be required before production of the ACHM continues. Once adjustments are made and the plant produced mix has the desired properties, the Contractor may request that a field mix design be accepted by the Engineer.

To create uniform, repeatable testing for RAP binder content, asphalt binder content of the RAP shall be determined using AASHTO T 308 with the specific requirements as follows:

- Sample shall be dried to a constant mass as per AASHTO T 329 using a drying temperature of $230^{\circ}\text{F} \pm 9^{\circ}\text{F}$.
- The ignition oven burn temperature used during the mix design process must be used for quality control. The burn temperature shall be reported on the mix design submittal.
- Asphalt Binder Content = % loss – Aggregate Correction Factor (ACF)
- An ACF for each processed RAP stockpile shall be submitted with the mix design if used. An ACF for the job mix formula shall be submitted on the mix design if used. If multiple ignition ovens are used, an ACF for each oven shall be submitted.
- Determination of the ACF may be based on regional historical data at the time of the change. This will ensure all parties involved are aware of the correction factor and therefore avoiding disagreements pertaining to manipulation/fluctuation in aggregate correction factors that could be used to adjust binder content data.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
PORTLAND CEMENT CONCRETE PAVEMENT

Division 500 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The first and second paragraph of **Subsection 501.02(a), Cement**, are hereby deleted and the following substituted therefor:

(a) Cement. Portland cement, blended cement, fly ash, and slag cement shall be from sources that are listed on the Department's Qualified Products List (QPL) in Division 500 and that have executed a certification agreement with the Department.

The first and second sentence of the third paragraph of **Subsection 501.02(a), Cement**, are hereby deleted and the following substituted therefor:

The total alkalis in the Portland cement or blended cement ($\text{Na}_2\text{O} + 0.658 \text{ K}_2\text{O}$) shall not exceed 0.60%. The total alkali content in the cementitious material shall not exceed 5 lb/cu yd (2.4 kg/cu m).

The fifth paragraph of **Subsection 501.02(b), Fine Aggregate**, is hereby deleted.

The sixth paragraph of **Subsection 501.02(c), Coarse Aggregate**, is hereby deleted.

Subsection 501.02(f), Cement Replacements, (1) Fly Ash, is hereby deleted and the following substituted therefor:

(1) Fly Ash. Fly ash for use with Portland cement or blended cement shall comply with the requirements of AASHTO M 295, Class C or Class F. Mixing of Class C or Class F fly ashes will not be permitted.

The sixth through thirteenth paragraphs of **Subsection 501.03 Mix Design. (a), General**, are hereby deleted and the following substituted therefor:

Fly ash may be used as a partial replacement for Portland or blended cement, not exceeding 25% by weight. Substitution shall be made at the rate of one pound (kilogram) of fly ash for each pound (kilogram) of cement replaced. Fly ash will not be allowed as a substitute for high early strength cements.

Slag cement may be used as a partial replacement for Portland or blended cement, not exceeding 25% by weight. Substitution shall be made at a rate of one kilogram (pound) of slag cement for each pound (kilogram) of cement replaced. Slag cement will not be allowed as a substitute for high early strength cements. Ternary mixes (cement, fly ash, and slag cement) are not allowed.

The minimum 28-day compressive strength shall be 4000 psi (28.0 MPa) when tested according to AASHTO T 22. Test specimens will be made and cured according to AASHTO T 23 or T 126 as applicable.

The mixed concrete shall have a uniform consistency with a slump, as determined by AASHTO T 119, not exceeding the tolerances as listed on the mix design. All admixtures shall comply with Subsection 501.02(e).

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
PORTLAND CEMENT CONCRETE PAVEMENT

Fine and coarse aggregate shall be added only in such proportion that satisfactory plasticity, workability, and consistency of the mix are maintained, with the further provision that the ratio of the fine aggregate to cement, based on dry and rodded measure, shall be not less than 1.5 nor more than 2.5.

The specified water/cement ratio shall not be exceeded, and the minimum compressive strength shall be met.

A minimum of 15 working days prior to the commencement of paving operations, the contractor shall submit to the Engineer of Materials for review and approval the following:

- Certification for the low alkali cement proposed for use OR the results of fine and coarse aggregates Potential Alkali Reactivity test (AASHTO T 303) in accordance with Options 1 or 2 of Subsection 501.02.
- A Job Mix Formula (JMF) that contains sources of all aggregates proposed for use, a composite gradation of all aggregates, and proportions of each aggregate. Individual gradations of each aggregate shall be included. The JMF may only be changed upon written approval of the Engineer. Composite gradations will be calculated using ARDOT Test Method 558.
- A completed ARDOT Concrete Mix Design Submittal form. This form is located on the Materials Division website for download.

The last sentence of the third paragraph of **Subsection 501.05(c), Measuring Materials, (1) General**, is hereby deleted and the following substituted therefor:

The load ticket shall show the following information:

1. Unique ticket number.
2. Identification of the truck.
3. Date and time of batching.
4. Total weights and/or volumes of each component.
5. Total volume of mix.
6. Total quantity of water added after batching.
7. Time of discharge.
8. ARDOT Mix Design ID

The first sentence of **Subsection 501.08, High Early Strength Concrete Pavement**, is hereby deleted and the following substituted therefor:

Cement used in High Early Strength Concrete shall conform to AASHTO M 85, Type III, AASHTO M 240, Table 3, or a Rapid Hardening Hydraulic Cement in compliance with ASTM C1600.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SUPPLEMENTAL SPECIFICATION

INCIDENTAL CONSTRUCTION

Sections 609, 611, 617, and 618 of the Standard Specifications for Highway Construction, Edition of 2014, are hereby amended as follows:

Subsection 609.02(c), Materials for Drop Inlets and Junction Boxes, is hereby deleted and the following is substituted therefor:

- (c) Steel for welded steel grates and frames shall comply with ASTM A709, Grade 36 (250).

Subsection 611.02(a)(2), Materials for Pipe Underdrains, Outlet Protectors, and Covers, is hereby deleted and the following is substituted therefor:

- (2) **Corrugated Polyethylene Tubing.** The tubing shall be the heavy duty type and shall comply with AASHTO M 252. The tubing shall have a minimum pipe stiffness of 46 psi (3.23 kg/cm²) at 5% deflection and shall be capable of 60 percent vertical deflection in parallel plate loading without splitting or cracking when tested in accordance with ASTM D 2412.

The second sentence of **Subsection 617.02(a)(2), Materials for Steel Posts**, is hereby deleted and the following is substituted therefor:

- (2) **Steel Posts.** The steel shall comply with ASTM A709, Grade 36 (250).

Subsection 617.02(b)(3), Materials for Terminal Anchor Posts, is hereby deleted and the following is substituted therefor:

- (3) The steel anchor posts shall consist of structural shapes of the section shown on the plans, or as otherwise specified, and shall comply with ASTM A709, Grade 36 (250). The upper 15" (380 mm) of the anchor assembly shall be galvanized according to AASHTO M 111.

The third sentence of the third paragraph **Subsection 618.02(a), Posts for Guard Cable**, is hereby deleted and the following is substituted therefor:

The steel shall comply with ASTM A709, Grade 36 (250).

Subsection 618.02(d), Materials for Bolts, Nuts, and Washers, is hereby deleted and the following is substituted therefor:

ARKANSAS DEPARTMENT OF TRANSPORTATION**SUPPLEMENTAL SPECIFICATION****INCIDENTAL CONSTRUCTION**

(d) Bolts, Nuts, and Washers. Bolts, nuts, and washers shall conform to the plans and shall be steel complying with ASTM A 307, ASTM F3125, Grade A325, Heavy Hex, Type 1, or ASTM A449 (Heavy Hex), galvanized according to AASHTO M 232. Threads on bolts and nuts shall conform to Unified Coarse Thread Series Class 2A, ANSI B 1.1 (Metric Coarse Thread Series, ANSI B 1.13M, 6g tolerance).

ARKANSAS DEPARTMENT OF TRANSPORTATION**SUPPLEMENTAL SPECIFICATION****LANE CLOSURE NOTIFICATION**

Division 600 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

Section 603, Maintenance of Traffic and Temporary Structures, is hereby modified as follows:

The first sentence of the third paragraph **Subsection 603.02 (d)** is hereby deleted and the following substituted therefor:

The Contractor shall provide the Engineer with a minimum of five full business days advance, written notification of any nonemergency lane closure or lane width restriction. The first full business day shall commence at midnight on the first business day following written notification to the Engineer. This advanced notification is required to allow adequate notice for the issuance of over width load permits by the Department.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
RETROREFLECTIVE SHEETING FOR
TRAFFIC CONTROL DEVICES IN CONSTRUCTION ZONES

Section 604 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The following is inserted after the first paragraph of Subsection 604.02(b):

Retroreflective sheeting used on traffic drums shall meet the requirements of ASTM D4956 for Type III or IV with the additional requirements for Reboundable Sheeting. Retroreflective sheeting for delineators shall comply with section 728.

Retroreflective sheeting shall be applied to a properly treated substrate with mechanical equipment and in a manner specified by the sheeting manufacturer. Sign material (substrate) shall be of sufficient thickness and stability to maintain a substantial, effective sign for the duration of the project. One splice will be allowed in retroreflective sheeting on sign blanks. "Left", "Right", "Distances", and "Ahead" will be allowed on signs as inserts. All letters and numerals on inserts shall be of the same size and series as those on the sign face.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SUPPLEMENTAL SPECIFICATION

TRAFFIC CONTROL DEVICES IN CONSTRUCTION ZONES (MASH)

Section 604 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The first paragraph of **Subsection 604.02 Materials (a) General** is hereby deleted and the following substituted therefor:

All work zone traffic control devices used on the project, including sign supports, barricades, traffic drums equipped with flashing lights, crash cushions, and impact attenuators, manufactured after December 31, 2019, shall comply with the requirements of the Manual for Assessing Safety Hardware (MASH). Such devices manufactured on or before December 31, 2019, and successfully tested to the requirements of National Cooperative Highway Research Program (NCHRP) Report 350 or the 2009 edition of MASH, may continue to be used throughout their normal service lives. The Contractor shall furnish a certification of such compliance from the manufacturer or supplier of all work zone traffic control devices prior to using the devices on the project. The certification shall state the device meets the requirements of MASH, or in the case that the device was manufactured on or before December 31, 2019, the certification shall state the device meets the requirements of NCHRP 350 or MASH. The certification shall include a copy of the Federal Highway Administration's (FHWA) approval letter with all attachments for each device. Devices shall be fabricated and installed in accordance with the plans and with the crash testing documentation provided in the FHWA approval letter which is available at:

http://safety.fhwa.dot.gov/roadway_dept/policy_guide/road_hardware/.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
CLASSIFICATION AND APPLICATION OF MARKINGS

Section 604 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The first paragraph of Subsection **604.03(f)(1)(c) Interim Pavement Markings** is hereby deleted and the following substituted therefor:

c. **Interim Pavement Markings.** Interim pavement markings are those that may be used for a short period of time until it is practical and possible to place either permanent or construction pavement markings. Interim pavement markings shall be replaced with permanent or construction markings or covered with a succeeding course of paving within seven (7) calendar days on high-volume roads or fourteen (14) calendar days on low-volume roads. Day 1 of the 7- or 14-day period is the first calendar day that it becomes practical and possible to place permanent or construction pavement markings. If interim markings are not covered or replaced with permanent or construction markings within the specified time period, no work on the project shall continue or commence until either permanent or construction pavement markings are in place. High-volume and low-volume roads will be designated on the plans.

The Subsection **604.03(f)(2)(a) Application of Markings, Final Surfaces**, is hereby deleted and the following substituted therefor:

a. **Final Surfaces.** Permanent or construction markings, as specified in the Contract, shall be in place on the final surface at the end of each day's operations on all lanes open to traffic. Unless otherwise specified, edge lines will not be required. The Contractor may, at Contractor option and expense, use interim pavement markings as follows:

High volume roads. On roadways designated on the plans as high volume, interim pavement markings may be used for not longer than 7 calendar days. All centerline and lane line permanent markings shall be placed within the 7-day period.

Low volume roads. On roadways designated on the plans as low volume, interim pavement markings may be used for not longer than 14 calendar days. All centerline and lane line permanent markings shall be placed within the 14-day period.

The Contractor shall carefully place all interim markings to avoid any overlapping by the permanent pavement markings. Interim pavement markings shall be removed from the final surface as soon as possible after the placement of permanent markings. Any voids caused by the removal of interim markings shall be repaired immediately at the Contractor's expense. For all markings that are to be removed, paint will not be allowed on the final surface unless otherwise authorized in writing by the Engineer.

On roadways open to traffic, if interim pavement markings are used, they shall be removed only after permanent pavement markings are in place.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
GUARDRAIL TERMINAL (TYPE 2)

Section 617 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The third paragraph of subsection **617.01 Description** is hereby deleted and the following substituted therefor:

The item “Guardrail Terminal (Type 2)” shall consist of furnishing and installing an acceptable crashworthy end terminal for W-beam guardrail at the locations shown in the plans or as directed by the Engineer. The guardrail terminal shall be specifically designed as a W-beam guardrail terminal, and shall provide an anchor against which the full tensile strength of the rail can be developed for downstream hits while remaining crashworthy for end-on impacts. The guardrail terminal shall satisfy the Manual for Assessing Safety Hardware (MASH) Test Level 3 (TL-3). The guardrail terminal shall be of a configuration that will be compatible with the site geometry shown on the plans. Guardrail terminals that require additional grading or require anchoring outside the limits of the site shown on the plans will be acceptable; however, the cost of any additional site work shall be included in the price bid for the particular type of guardrail terminal used. Guardrail terminals shown on the plans shall be 50 feet (15 meters) in length. Any additional length of guardrail needed to fulfill the 50 feet (15 meters) requirement shall be included in the price bid for the particular type of guardrail terminal used.

The first paragraph of subsection **617.02(f), Guardrail Terminal (Type 2)**, is hereby deleted and the following substituted therefor:

The Contractor shall furnish a certification from the manufacturer or supplier that the guardrail terminal meets the requirements of MASH Test Level 3 (TL-3). All materials shall be new. Rail elements and posts shall meet the requirements above. All steel components shall be galvanized. All parts shall be clearly identified for proper assembly and replacement.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
GUARDRAIL DELINEATORS

Division 600 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

Section 617, GUARDRAIL is hereby modified as follows:

The following is hereby added as **Subsection 617.02(g) Delineators**.

Guardrail delineators shall be included on the Department's Qualified Product List (QPL).

The following is hereby added as **Subsection 617.03 (g) Delineators**.

Guardrail delineators shall be installed at 37.5' spacing maximum in tangent sections except that any individual run of guardrail shall have no less than three delineators installed. Spacing may be reduced in curves as directed by the Engineer.

Guardrail delineators shall have a minimum reflective area of 8.0 sq. in. per side, be made of galvanized metal with a 12-gauge minimum thickness, and be capable of being bolted to the guardrail web. The delineator shall have two (2) reflective surfaces and shall use reflective sheeting conforming to ASTM D4956 Types VIII or IX. Reflective sheeting used shall be listed on the Department's Qualified Products List (QPL) 723 Reflective Sheeting.

The following is hereby added as the last sentence of **Subsection 617.05 Basis of Payment. (a)**

Payment for the Guardrail Delineators will not be paid for separately, but full compensation therefor will be considered included in the contract unit price for Guardrail (Type ____).

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
Mulch Cover

Section 620 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

Subsection **620.02 Materials (d)** is hereby deleted and the following substituted therefore:

(d) Mulch cover. Shall be a mulch cover system as listed on the Department's Qualified Products List (QPL) or shall consist of straw from threshed rice, oats, wheat, barley, or rye; of wood excelsior; or of hay obtained from various legumes or grasses, such as lespedeza, clover, vetch, soybeans, bermuda, carpet sedge, bahia, fescue, or other legumes or grasses; or a combination thereof. Mulch shall be dry and reasonably free from Johnson grass or other noxious weeds, and shall not be excessively brittle or in an advanced state of decomposition. All material will be inspected and approved prior to use.

The following is inserted after Subsection **620.03 Construction Requirements (c) Seeding (3) Hydro-seeding**:

(4) Mulch Cover. If a mulch cover system listed on the Department's Qualified Products List (QPL) is used then the mulch cover and the seed may be incorporated into one operation.

Subsection **620.03 Construction Requirements (d)** is hereby deleted and the following substituted therefore:

(d) Mulch Cover. If a Mulch Cover system listed on the Department's Qualified Products List (QPL) is used then refer to the application rate listed in the QPL otherwise the mulch cover shall be applied at the rate of 4000 pounds per acre (4500 kg/ha). If the mulch cover and seed are not incorporated into one operation then apply the mulch cover immediately after seeding and spread the mulch cover uniformly over the entire area by approved power mulching equipment. When approved by the Engineer, the Contractor may use hand methods to apply mulch cover to small or inaccessible areas. If the Contractor so elects, an approved mulching machine may be used, whereby the application of mulch cover and tackifier may be combined into one operation. If this method is used, no change in application rates will be allowed. In its final position, the anchored mulch shall be loose enough to allow air to circulate, but compact enough to partially shade the ground and reduce the impact of rainfall on the surface of the soil. Care shall be taken to prevent tackifier materials from discoloring or marking structures, pavements, utilities, or other plant growth. Removal of any objectionable discoloration shall be at no cost to the Department.

**ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION**

Mulch Cover

The first paragraph of subsection **620.03 Construction Requirements (e)** is hereby deleted and the following substituted therefore:

(e) Mulch Anchoring. If a mulch cover system is selected from the Department's Qualified Products List (QPL) then no additional anchoring is needed. If a mulch cover system is not used then immediately following or during the application of mulch cover on seeded areas, the mulch shall be anchored by one of the following methods.

ARKANSAS DEPARTMENT OF TRANSPORTATION**SUPPLEMENTAL SPECIFICATION****BRIDGE END TERMINAL**

Section 734 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The first paragraph of subsection **734.01 Description** is hereby deleted and the following substituted therefor:

This item shall consist of furnishing and installing an acceptable crashworthy terminal at bridge ends at the locations shown in the plans or as directed by the Engineer. The bridge end terminal shall satisfy the latest edition of the Manual for Assessing Safety Hardware (MASH) requirements for a test level 3 (TL-3) terminal.

The first paragraph of subsection **734.02 Materials (b) Bridge End Terminal** is hereby deleted and the following substituted therefor:

The Contractor shall furnish a certification from the manufacturer or supplier that the bridge end terminal is non-gating, redirective, and meets the requirements of the latest edition of MASH for a TL-3 terminal. All materials shall be new and shall conform to the most current specifications and details recommended by the manufacturer and as approved by the Engineer. All parts shall be clearly identified for proper assembly and replacement.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
CONCRETE FOR STRUCTURES

Division 800 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

The first and second paragraph of **Subsection 802.02(a), Cement**, are hereby deleted and the following substituted therefor:

(a) Cement. Portland cement, blended cement, fly ash, and slag cement shall be from sources that are listed on the Department's Qualified Products List (QPL) in Division 500 and that have executed a certification agreement with the Department.

The first and second sentence of the third paragraph of **Subsection 802.02(a), Cement**, are hereby deleted and the following substituted therefor:

The total alkalis in the Portland or blended cement ($\text{Na}_2\text{O} + 0.658 \text{ K}_2\text{O}$) shall not exceed 0.60%. The total alkalis in the cementitious material shall not exceed 5 lbs./cu yd (2.4 kg/cu m).

The sixth paragraph of **Subsection 802.02(b), Fine Aggregate**, is hereby deleted.

The sixth paragraph of **Subsection 802.02(c), Coarse Aggregate**, is hereby deleted.

Subsection 802.02(e), Admixtures, is hereby deleted and the following substituted therefor:

(e) Admixtures. Admixtures shall be from sources that are listed on the Department's QPL in Division 500. Admixtures will be reviewed and approved during the mix design submittal. Admixtures shall be compatible with each other, as advised by the manufacturer. The admixture dosage rate range as recommended by the manufacturer shall be used. Should the dosage rate for any admixture not yield desirable characteristics in the concrete, the dosage of admixture used shall be based on test results obtained by trial batches.

Admixtures shall be added to the mixing water by means of a mechanical dispenser that will accurately meter the additive throughout the mix water cycle. The dispenser shall be constructed and connected so that the amount of admixture entering the mixing water can be readily determined.

Subsection 802.05(b), Mix Design by the Contractor, is hereby deleted and the following substituted therefor:

(b) Mix Design by the Contractor. The proportions to be used in the mix for each class shall be determined by the Contractor using the absolute volume method. The Contractor may use the procedure provided in the ACI Standard 211.1 or Portland Cement Association "Design and Control of Concrete Mixtures", modified to comply with the minimum compressive strength and maximum water/cement ratio specified for the class of concrete. A minimum of 15 business days prior to the start of production of the concrete mixture, the Contractor shall submit test results and/or certifications for all materials and detailed mix design data to the Engineer of Materials for review and approval. The ARDOT Concrete Mix Design Submittal form is available for download on the Materials Division website and shall be used. The Department will assign a Mix Design ID, and it shall be included on the delivery ticket.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
CONCRETE FOR STRUCTURES

The Contractor will submit slump ranges during the mix design process. The Engineer of Materials will determine the allowable tolerances for slump during review of the mix design. The mixed concrete shall have a uniform consistency with a slump, as determined by AASHTO T 119, not exceeding the tolerances as listed on the mix design.

Acceptance of the mix design by the Engineer will be based on apparent conformity to the requirements shown in Table 802-1 and listed herein. If the mix design fails to produce acceptable results or if there is a change in the aggregates, fly ash, or cement being used, a new mix design will be required. It shall remain the Contractor's responsibility during production to produce concrete conforming to the mix design and the minimum acceptance criteria specified. When requested by the Engineer, the Contractor shall submit samples of all materials for verification testing. Production shall not begin until the mix design is accepted by the Engineer.

A mix design submitted for acceptance need not be prepared specifically for this project but may be a previously accepted design that uses the same materials and meets the same design criteria.

Mix designs accepted under this section will become the property of the Department and may be accepted for use on other projects, by other contractors, or by the Department.

In **Table 802-1**, Slump Range for all classes of concrete are hereby deleted.

The first paragraph of **Subsection 802.05(d), Fly Ash**, is hereby deleted and the following substituted therefor:

Fly ash may be used as a partial replacement for Portland or blended cement, not exceeding 25% by weight. Substitution shall be made at the rate of one pound (kilogram) of fly ash for each pound (kilogram) of cement replaced, in all classes of concrete except Class B. Substitution shall be made at the rate of one pound (kilogram) of fly ash for each pound (kilogram) of cement replaced. The water/cement ratio shall be calculated using the total weight of both cement and fly ash. Fly ash in Class B concrete shall meet the requirements specified in Subsection 802.05(c) and listed herein. Mixtures with fly ash shall meet the same requirements as mixtures without fly ash. Fly ash will not be allowed as a substitute in high early strength mixes. When fly ash is used, the total weight of both cement and fly ash will be used in design calculations.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SUPPLEMENTAL SPECIFICATION

REINFORCING STEEL FOR STRUCTURES

Section 804 of the Standard Specifications for Highway Construction, Edition of 2014, is hereby amended as follows:

Subsection 804.02 Materials (b) Wire and Wire Fabric is hereby deleted and the following is substituted therefor:

(b) Wire and Welded Wire Reinforcement. Wire, when used as reinforcement in concrete, shall conform to the requirements of AASHTO M 336. For plain wire, Grade 70 shall be furnished unless otherwise specified.

Welded wire reinforcement, when used as reinforcement in concrete, shall conform to the requirements of AASHTO M 336. For welded wire reinforcement, Grade 65 shall be furnished unless otherwise specified. The type of welded wire reinforcement shall be approved by the Engineer.

EXCEPTIONS TO JOB NO. A20044
(BRIDGES)

- △ LOG MILE 1.811 BR. END
31.00' BRIDGE NO. 03371
24'-0" CLEAR ROADWAY
LOG MILE 1.817 BR. END
- △ LOG MILE 2.298 BR. END
31.00' BRIDGE NO. 03372
24'-0" CLEAR ROADWAY
LOG MILE 2.304 BR. END
- △ LOG MILE 5.871 BR. END
31.00' BRIDGE NO. 03373
24'-0" CLEAR ROADWAY
LOG MILE 5.877 BR. END
- △ LOG MILE 9.456 BR. END
57.00' BRIDGE NO. 03374
24'-0" CLEAR ROADWAY
LOG MILE 9.467 BR. END
- △ LOG MILE 16.075 BR. END
155.10' BRIDGE NO. 03376
24'-0" CLEAR ROADWAY
LOG MILE 16.104 BR. END
- △ LOG MILE 22.366 BR. END
124.00' BRIDGE NO. 03377
24'-0" CLEAR ROADWAY
LOG MILE 22.390 BR. END
- △ LOG MILE 22.622 BR. END
62.00' BRIDGE NO. 03378
24'-0" CLEAR ROADWAY
LOG MILE 22.634 BR. END

ARKANSAS DEPARTMENT OF TRANSPORTATION
CONSTRUCTION PLANS FOR STATE HIGHWAY


HWY. 165 - HWY. 152 (S)

ARKANSAS COUNTY
ROUTE 130 SECTION 6


JOB A20044

FED. AID PROJ. STPR-000(103)

DATE REVISED	DATE REVISED	FED. AID PROJECT NO.	STATE	JOB NO.	SHEET NO.	TOTAL SHEETS
		6	ARK.	A20044	1	22
HWY. 165 - HWY. 152 (S)						

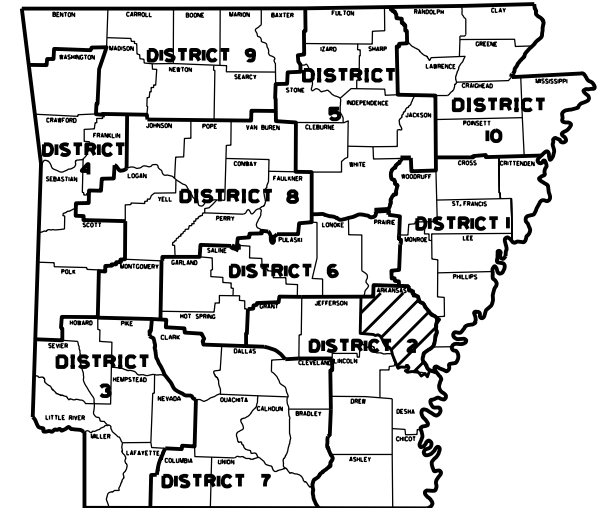

ARK. HWY. DIST. NO. 2

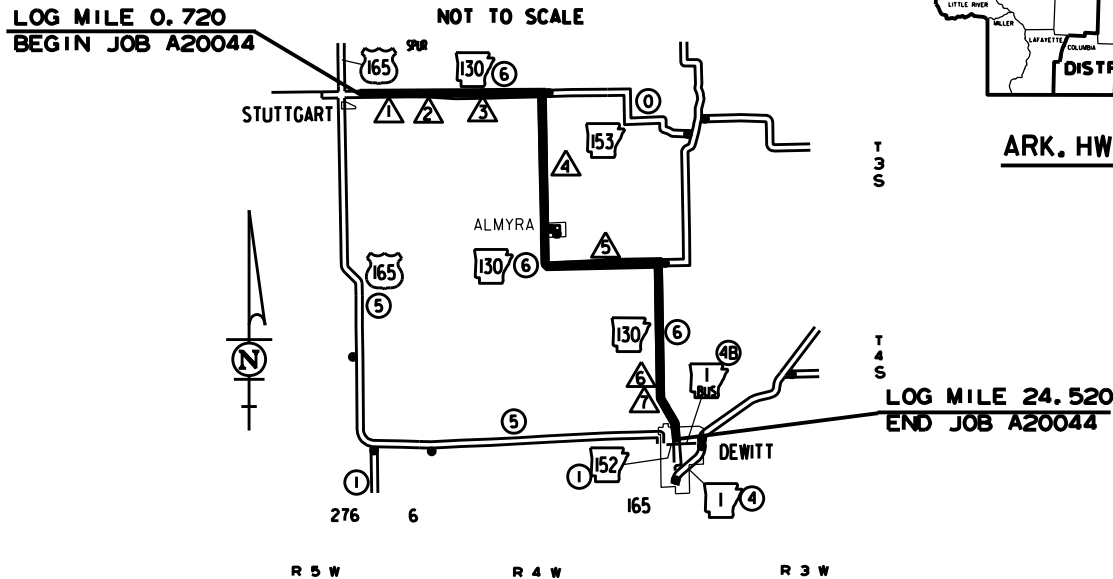

MID POINT OF PROJECT
LATITUDE = N 34° 25' 02"
LONGITUDE = W 91° 25' 01"

GROSS LENGTH OF PROJECT	125664.00	FEET	OR	23.800	MILES
NET " " ROADWAY	125172.90	"	"	23.707	"
NET " " BRIDGES	0.00	"	"	0.000	"
NET " " PROJECT	125172.90	"	"	23.707	"

**READY FOR
DISTRICT ENGINEER
STAMP, SIGNATURE, & DATE**

APPROVED

DISTRICT ENGINEER

INDEX OF SHEETS

SHEET NO.	TITLE
1	TITLE SHEET
2	INDEX OF SHEETS, STANDARD DRAWINGS, AND GOVERNING SPECIFICATIONS
3	GENERAL NOTES
4 - 5	TYPICAL SECTIONS OF IMPROVEMENT
6 - 15	SPECIAL DETAILS
16 - 21	QUANTITIES
22	SUMMARY OF QUANTITIES AND REVISIONS

BRIDGE STANDARD DRAWINGS

DRWG.NO.	TITLE	DATE
55039	STANDARD DETAILS FOR TYPE 'CT' APPROACH GUTTERS (BRIDGES WITH CURB)	11-07-19

ROADWAY STANDARD DRAWINGS

DRWG.NO.	TITLE	DATE
DR-3	DETAILS OF DRIVEWAYS & STREET TURNOUTS (PAVEMENT PRESERVATION)	04-13-23
GR-6	GUARDRAIL DETAILS	05-19-22
GR-7	GUARDRAIL DETAILS	11-07-19
GR-8	GUARDRAIL DETAILS	11-07-19
GR-9	GUARDRAIL DETAILS	11-07-19
GR-10	GUARDRAIL DETAILS	11-07-19
GR-11	GUARDRAIL DETAILS	11-07-19
GR-12	GUARDRAIL DETAILS	05-14-20
PM-1	PAVEMENT MARKING DETAILS	04-09-26
TC-1	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	08-14-25
TC-1A	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	04-09-26
TC-2	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	08-14-25
TC-3	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	08-14-25
TC-6	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	04-09-26
TEC-1	TEMPORARY EROSION CONTROL DEVICES	11-16-17


GOVERNING SPECIFICATIONS

ARKANSAS STATE HIGHWAY COMMISSION STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION, EDITION OF 2014, AND THE FOLLOWING SPECIAL PROVISIONS AND SUPPLEMENTAL SPECIFICATIONS:


NUMBER	TITLE
ERRATA	ERRATA FOR THE BOOK OF STANDARD SPECIFICATIONS
FHWA-1273	REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - NOTICE TO CONTRACTORS
FHWA-1273	SUPPLEMENT - SPECIFIC EQUAL EMPLOYMENT OPPORTUNITY RESPONSIBILITIES (23 U.S.C. 140)
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - GOALS AND TIMETABLES
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - FEDERAL STANDARDS
FHWA-1273	SUPPLEMENT - POSTERS AND NOTICES REQUIRED FOR FEDERAL-AID PROJECTS
FHWA-1273	SUPPLEMENT - WAGE RATE DETERMINATION
FHWA-1273	SUPPLEMENT - TRAINING PROGRAM - JOB A20044
100-3	CONTRACTOR'S LICENSE
100-4	DEPARTMENT NAME CHANGE
102-2	ISSUANCE OF PROPOSALS
102-3	PREQUALIFICATION OF BIDDERS
103-2	CONTACT INFORMATION FOR MOTORIST DAMAGE CLAIMS
105-4	MAINTENANCE DURING CONSTRUCTION
107-2	RESTRAINING CONDITIONS
108-1	LIQUIDATED DAMAGES
108-2	WORK ALLOWED PRIOR TO ISSUANCE OF WORK ORDER
108-3	WORK ORDER FOR FIXED COMPLETION DATE CONTRACTS
303-1	AGGREGATE BASE COURSE
306-1	QUALITY CONTROL AND ACCEPTANCE
307-2	CEMENT TREATED BASE COURSE
308-2	CEMENT STABILIZED CRUSHED STONE BASE COURSE
400-1	TACK COATS
400-4	DESIGN AND QUALITY CONTROL OF ASPHALT MIXTURES
400-5	PERCENT AIR VOIDS FOR ACHM MIX DESIGNS
400-6	LIQUID ANTI-STRIP ADDITIVE
400-7	TRACKLESS TACK
404-3	DESIGN OF ASPHALT MIXTURES
409-2	ASPHALT LABORATORY FACILITY
410-1	CONSTRUCTION REQUIREMENTS AND ACCEPTANCE OF ASPHALT CONCRETE PLANT MIX COURSES
410-2	DEVICES FOR MEASURING DENSITY FOR ROLLING PATTERNS
410-4	EVALUATION OF ACHM SUBLOT REPLACEMENT MATERIAL
416-1	RECYCLED ASPHALT PAVEMENT
501-3	PORTLAND CEMENT CONCRETE PAVEMENT
600-2	INCIDENTAL CONSTRUCTION
603-1	LANE CLOSURE NOTIFICATION
604-1	RETROREFLECTIVE SHEETING FOR TRAFFIC CONTROL DEVICES IN CONSTRUCTION ZONES
604-3	TRAFFIC CONTROL DEVICES IN CONSTRUCTION ZONES (MASH)
604-4	CLASSIFICATION AND APPLICATION OF MARKINGS
617-1	GUARDRAIL TERMINAL (TYPE 2)
617-2	GUARDRAIL DELINEATORS
620-1	MULCH COVER
734-1	BRIDGE END TERMINAL
802-5	CONCRETE FOR STRUCTURES
804-2	REINFORCING STEEL FOR STRUCTURES
JOB A20044	BIDDING REQUIREMENTS AND CONDITIONS
JOB A20044	BUY AMERICA - CONSTRUCTION MATERIALS
JOB A20044	CARGO PREFERENCE ACT REQUIREMENTS
JOB A20044	COLD MILLING - COUNTY PROPERTY
JOB A20044	CONSTRUCTION PROJECT INFORMATION SIGN
JOB A20044	DESIGN AND QUALITY CONTROL OF ASPHALT MIXTURES
JOB A20044	DOCUMENTATION OF PAYMENTS MADE - PROMPT PAYMENT (SIGNET)
JOB A20044	ELECTRONIC TICKETING SYSTEMS (E-TICKETING)
JOB A20044	LIQUIDATED DAMAGES PROCEDURE FOR BID LETTINGS
JOB A20044	LONGITUDINAL JOINT DENSITIES FOR ACHM SURFACE COURSES
JOB A20044	MANDATORY ELECTRONIC CONTRACT
JOB A20044	MANDATORY ELECTRONIC DOCUMENT SUBMITTAL
JOB A20044	PORTABLE TRAFFIC SIGNAL SYSTEM
JOB A20044	PRICE ADJUSTMENT FOR ASPHALT BINDER
JOB A20044	PRICE ADJUSTMENT FOR FUEL
JOB A20044	PRIME CONTRACTOR PERFORMANCE EVALUATION
JOB A20044	PROHIBITION OF CERTAIN TELECOMMUNICATIONS AND VIDEO SURVEILLANCE SERVICES OR EQUIPMENT
JOB A20044	ROADWAY CONSTRUCTION CONTROL - PAVEMENT PRESERVATION
JOB A20044	RUMBLE STRIPS
JOB A20044	SUBMISSION OF ASPHALT CONCRETE HOT MIX ACCEPTANCE TEST RESULTS
JOB A20044	VENDOR REGISTRATION REQUIREMENT
JOB A20044	WARM MIX ASPHALT
JOB A20044	WATER POLLUTION CONTROL

GENERAL NOTES


1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING U. S. MAILBOXES WITHIN THE PROJECT LIMITS IN SUCH A MANNER THAT THE PUBLIC MAY RECEIVE CONTINUED MAIL SERVICE. PAYMENT WILL BE CONSIDERED INCLUDED IN THE PRICE BID FOR THE VARIOUS BID ITEMS.
2. THE CONTRACTOR SHALL PROVIDE 2-WAY RADIO COMMUNICATIONS FOR FLAG PERSONS.
3. STRINGLINE WILL BE USED TO MAINTAIN A UNIFORM HORIZONTAL ALIGNMENT.
4. THE CONTRACTOR SHALL FURNISH AND MAINTAIN STD. W8-1 "BUMP" SIGNS (30" X 30") WITH BLACK LEGEND ON ORANGE BACKGROUND AT ALL TRANSVERSE JOINTS EXPOSED TO TRAFFIC.
5. THE CONTRACTOR SHALL FURNISH AND MAINTAIN STD. W8-11 "UNEVEN LANES" SIGNS (48" X 48") WITH BLACK LEGEND ON ORANGE BACKGROUND AT ALL LONGITUDINAL JOINTS DURING MILLING AND PAVING OPERATIONS.
6. AGGREGATE BASE COURSE OUTSIDE THE EXISTING SHOULDERS SHALL BE UNIFORMLY COMPACTED, STABLE, AND FREE OF SEGREGATION. THE DENSITY REQUIREMENTS OF SECTION 303 ARE HEREBY WAIVED.
7. THE EDGE LINES SHALL NOT BE PLACED ON THE FINISHED ASPHALT SURFACE UNTIL AFTER ALL WORK ADJACENT TO THE PAVEMENT EDGE, INCLUDING SPREADING, COMPACTING AND ETC. IS COMPLETED IN ORDER TO AVOID DAMAGING THE EDGE LINES.
8. BRIDGE ANALYSIS SHALL BE REQUIRED PER SECTION 105.14 OF THE STANDARD SPECIFICATIONS.
9. TRAFFIC WILL BE PERMITTED TO TRAVEL ON MILLED SURFACES UP TO A MAXIMUM OF 48 HOURS. CONTRACTOR WILL BE RESPONSIBLE TO MAINTAIN POSITIVE DRAINAGE AT ALL TIMES.
10. WHEN COLD MILLING IS INCLUDED IN THE CONTRACT, THE CONTRACTOR SHALL PROVIDE A TEMPORARY TRANSITION IN AREAS OF PAVEMENT DIFFERENTIAL RESULTING FROM THE COLD MILLING. MEASUREMENT FOR THE MATERIAL USED WILL BE BASED ON THE ACCEPTED MIX DESIGN FOR THE TYPE OF ASPHALT HOT MIX SPECIFIED IN THE PLANS FOR THE MAT TO BE PLACED AFTER COLD MILLING, AND PAYMENT WILL BE AT THE CONTRACT UNIT PRICE FOR THE VARIOUS COMPONENTS OF THE MIX.
11. PREPARATORY WORK, SUCH AS CLIPPING THE GRASS AND DEBRIS FROM THE EDGE OF THE EXISTING ROADWAY, WILL NOT BE PAID FOR DIRECTLY BUT WILL BE CONSIDERED A PART OF THE OTHER ITEMS OF WORK. AFTER THE ROADWAY IS COMPLETED, THIS MATERIAL SHALL BE PULLED UP TO THE EDGE OF THE NEW PAVEMENT. HOWEVER, THIS MATERIAL SHALL BE PULLED UP TO THE EDGE OF THE NEW PAVEMENT IMMEDIATELY AT LOCATIONS WHERE DROP-OFFS GREATER THAN 4" RESULT FROM THE OVERLAY. NO DIRECT PAYMENT WILL BE MADE FOR THIS WORK, BUT WILL BE CONSIDERED SUBSIDIARY TO OTHER ITEMS OF WORK.
12. THE COLD MILLED SURFACE SHALL BE OVERLAID WITHIN 3 WORKING DAYS AFTER THE MILLING IS COMPLETED. IF ANY AREA OF THE PROJECT HAS BEEN MILLED AND IS NOT OVERLAID ON OR BEFORE THE 3RD DAY, NO ADDITIONAL MILLING SHALL TAKE PLACE UNTIL THE MILLED AREA IS OVERLAID.
13. ALL CROSS SLOPES ARE TO MATCH EXISTING CROSS SLOPES UNLESS OTHERWISE APPROVED BY THE ENGINEER.

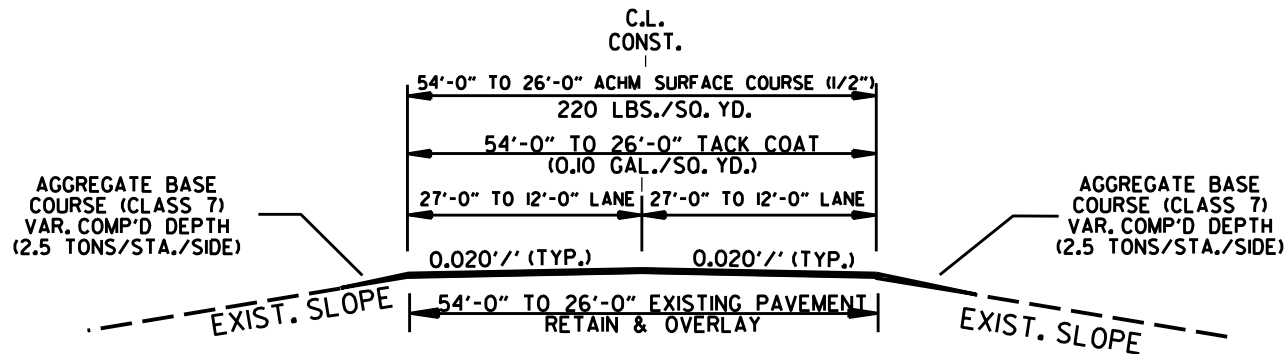

2 LANE OPEN SHOULDER OVERLAY
LOG MILE 0.720 TO LOG MILE 0.755

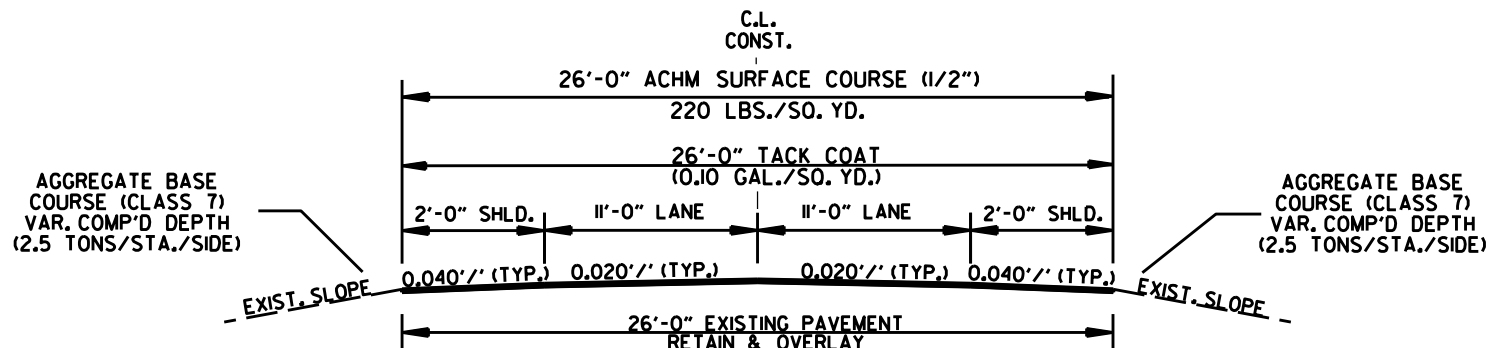

2 LANE OPEN SHOULDER OVERLAY
LOG MILE 0.755 TO LOG MILE 1.702

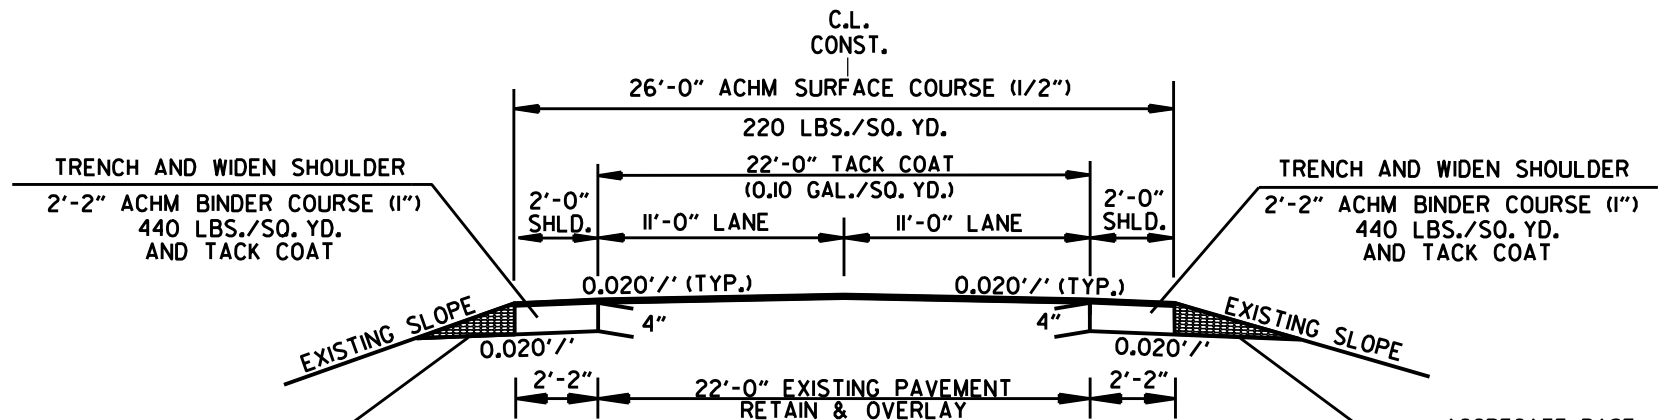

AGGREGATE BASE COURSE (CLASS 7) VAR. COMP'D DEPTH (3.5 TONS/STA./SIDE)

AGGREGATE BASE COURSE (CLASS 7) VAR. COMP'D DEPTH (3.5 TONS/STA./SIDE)

2 LANE OPEN SHOULDER OVERLAY WITH MINOR WIDENING

LOG MILE 1.702 TO LOG MILE 1.811
 LOG MILE 1.817 TO LOG MILE 2.298
 LOG MILE 2.304 TO LOG MILE 5.871
 LOG MILE 5.877 TO LOG MILE 7.867
 LOG MILE 7.908 TO LOG MILE 9.456
 LOG MILE 9.467 TO LOG MILE 16.075
 LOG MILE 16.104 TO LOG MILE 17.838
 LOG MILE 17.868 TO LOG MILE 22.366
 LOG MILE 22.390 TO LOG MILE 22.622
 LOG MILE 22.634 TO LOG MILE 24.520

BRIDGE 03371 LOG MILE 1.811 TO LOG MILE 1.817

BRIDGE 03372 LOG MILE 2.298 TO LOG MILE 2.304

BRIDGE 03373 LOG MILE 5.871 TO LOG MILE 5.877

INTERSECTION OF HWY. 130 AND HWY. 153 LOG MILE 7.867 TO LOG MILE 7.908


BRIDGE 03374 LOG MILE 9.456 TO LOG MILE 9.467

BRIDGE 03376 LOG MILE 16.075 TO LOG MILE 16.104


INTERSECTION OF HWY. 130 AND HWY. 33 LOG MILE 17.838 TO LOG MILE 17.868

BRIDGE 03377 LOG MILE 22.366 TO LOG MILE 22.390

BRIDGE 03378 LOG MILE 22.622 TO LOG MILE 22.634

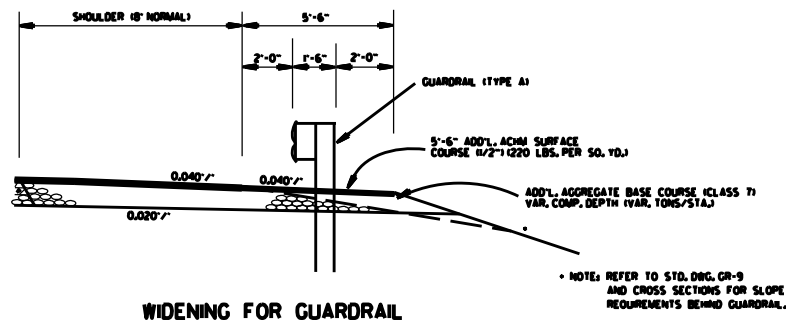


WIDENING FOR GUARDRAIL

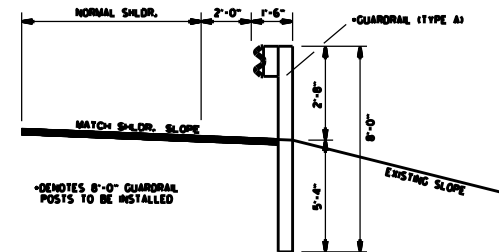

SECTION DETAIL FOR GUARDRAIL




NOTE: REFER TO STANDARD DRAWINGS CR-6, CR-8, CR-9, CR-10, CR-11, & CR-12 FOR ADDITIONAL INFORMATION.

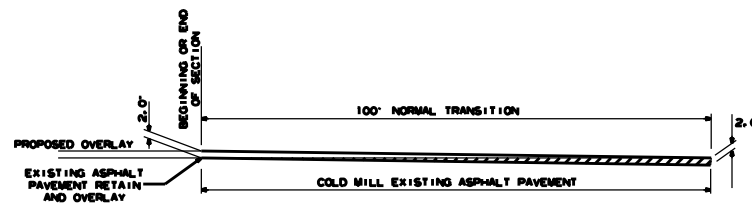

DETAIL FOR TRANSITIONS


NOTE: THE 100' TYPICAL CONNECTION LENGTH FOR TAPERING INTO EXISTING PAVEMENT MAY BE REDUCED BY THE ENGINEER WHEN USED FOR SIDE STREET CONNECTIONS.

1. TRENCH WILL BE EXCAVATED AS SHOWN ON THE DETAILS FOR CASE 1 OR CASE 2 BELOW.
2. MATERIAL DEEMED ACCEPTABLE MAY BE WIND ROWED IN SELECT LOCATIONS AND UTILIZED AS SHOWN IN CASE 2 BELOW.

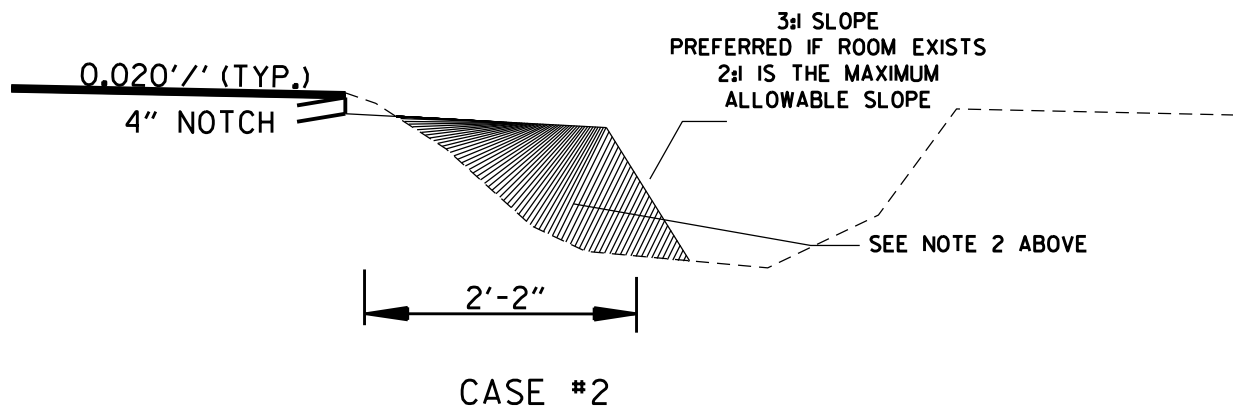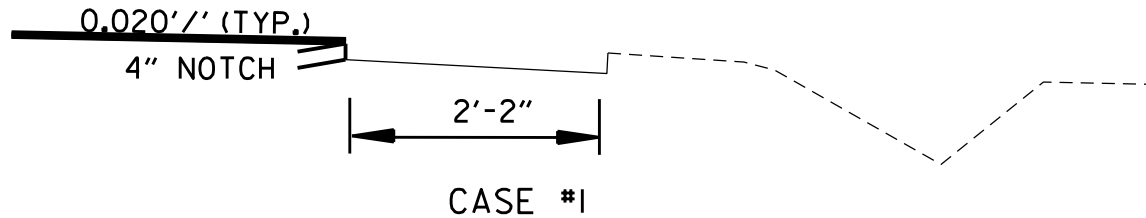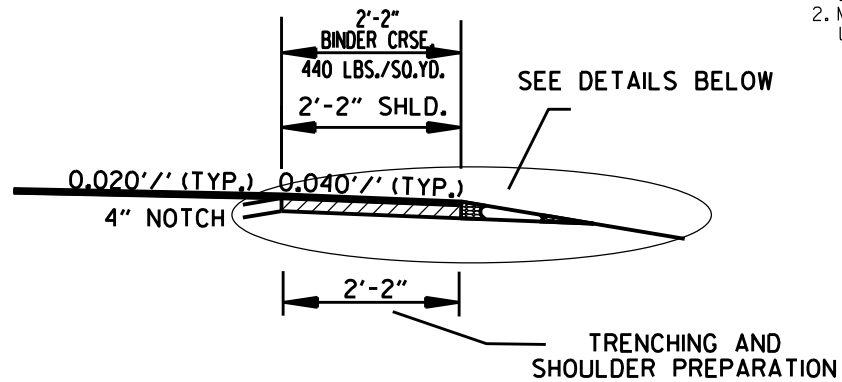

TRENCHING AND SHOULDER PREPARATION

•YELLOW CONST. PAVEMENT MARKINGS TO BE USED
IF AND WHERE DIRECTED BY THE ENGINEER
WHEN EXISTING PASSING LANES ARE PRESENT.


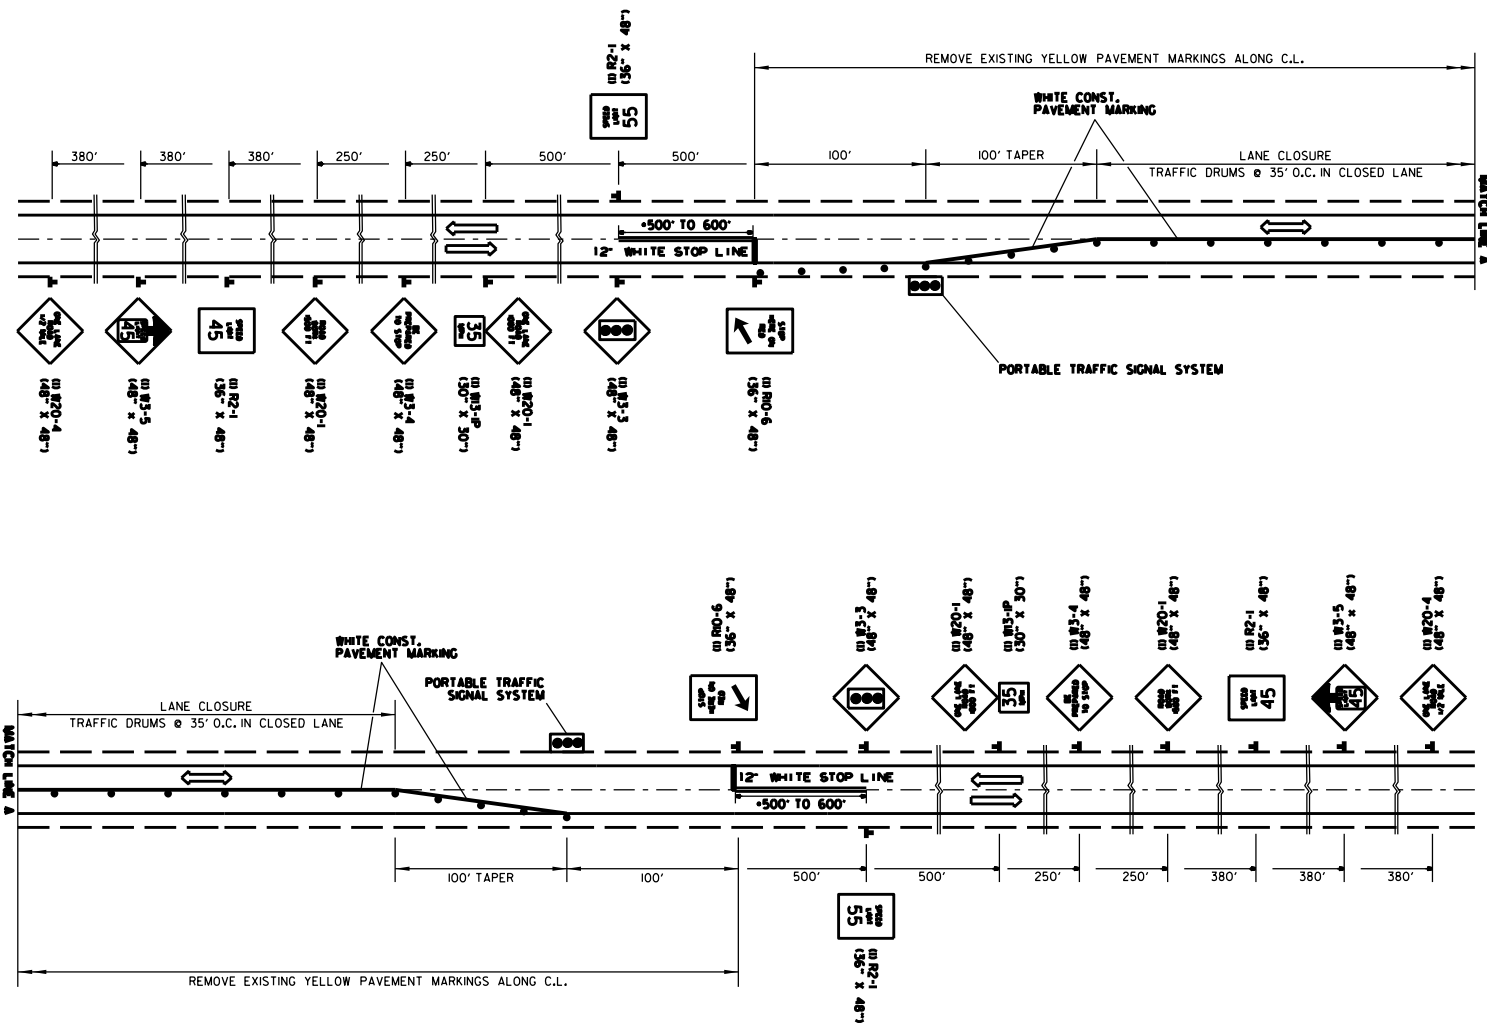


LANE CLOSURE WITH PORTABLE TRAFFIC SIGNAL SYSTEM &
TRAFFIC DRUMS






REVISIONS

DATE OF REVISION	REVISION

LEGEND

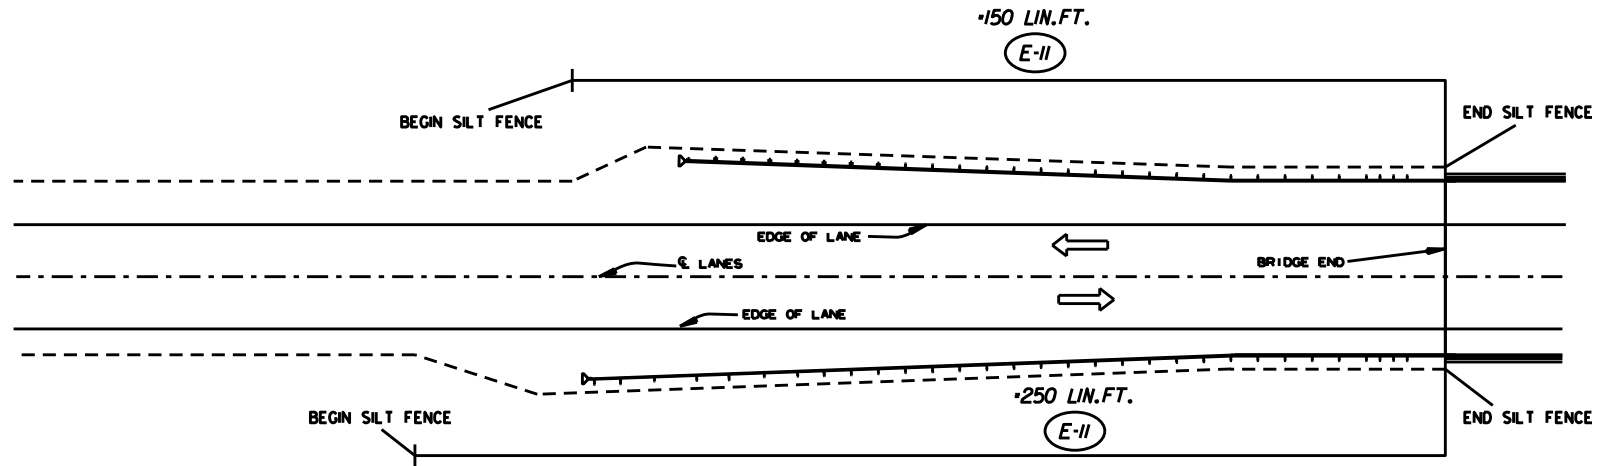

TYPICAL SILT FENCE INSTALLATION FOR WIDENING FOR GUARDRAIL AT BRIDGE ENDS

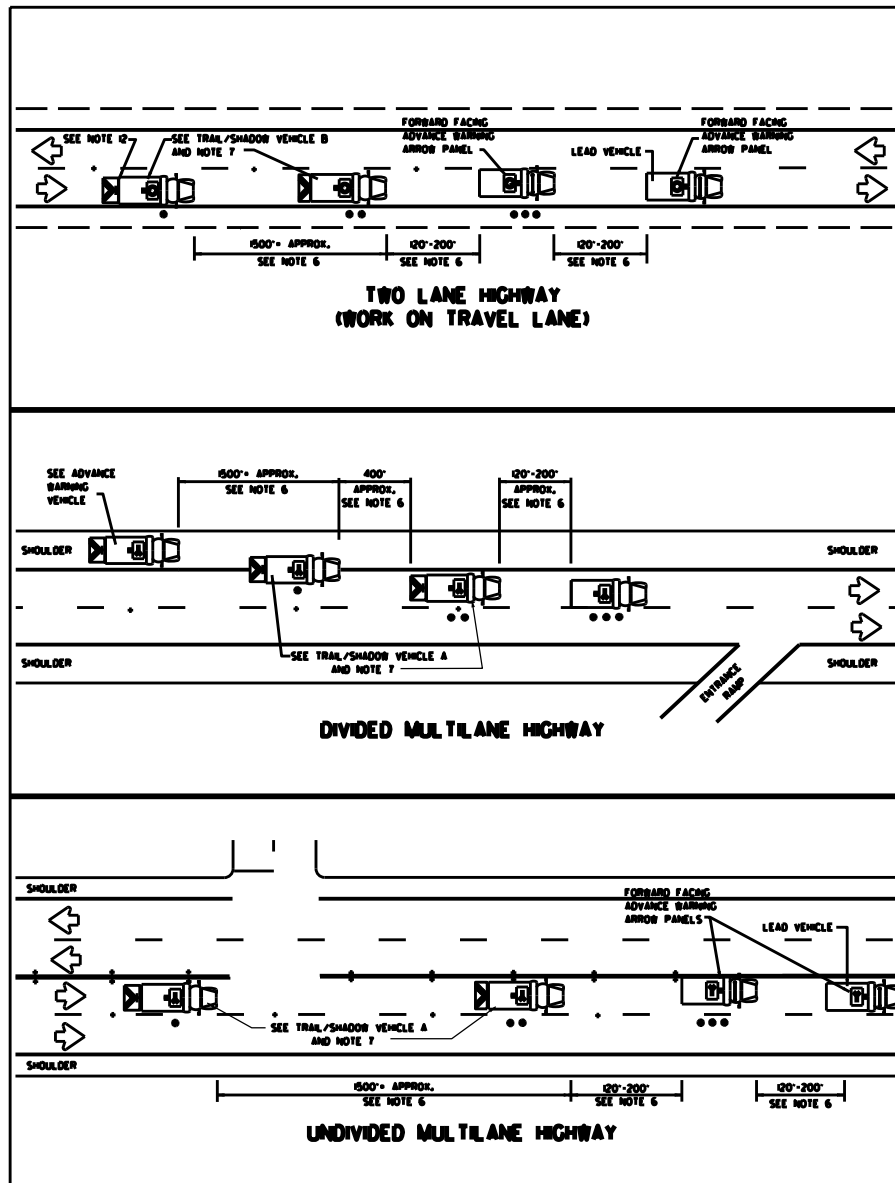

LEGEND	
●	TRAIL VEHICLE
●●	SHADOW VEHICLE
●●●	WORK VEHICLE
□	HEAVY WORK VEHICLE
□	TRUCK MOUNTED ATTENUATOR (TMA)
◀▶	TRAFFIC FLOW
▶	ADVANCE WARNING ARROW PANEL DISPLAY
▶	RIGHT DIRECTIONAL
◀	LEFT DIRECTIONAL
◀▶	DOUBLE ARROW
◀▶	CAUTION (ALTERNATING DIAMOND OR 4 CORNER FLASH)

TYPICAL APPLICATION - MOBILE WORK ZONE


GENERAL NOTES:

1. TRAIL, SHADOW, AND LEAD VEHICLES SHALL BE EQUIPPED WITH ADVANCE WARNING ARROW PANELS AS ILLUSTRATED.
2. THE USE OF AMBER OR GREEN HIGH-INTENSITY ROTATING, FLASHING, OSCILLATING, OR STROBE LIGHTS ON ALL VEHICLES ARE REQUIRED. VEHICLE HAZARD WARNING SIGNALS SHALL NOT BE USED INSTEAD OF THE VEHICLE'S HIGH-INTENSITY ROTATING, FLASHING, OSCILLATING, OR STROBE LIGHTS.
3. THE USE OF TRUCK MOUNTED ATTENUATORS (TMA) ON THE SHADOW VEHICLE, ADVANCE WARNING AND TRAIL VEHICLE ARE REQUIRED.
4. EACH VEHICLE SHALL HAVE TWO-WAY RADIO COMMUNICATION CAPABILITY.
5. WHEN WORK CONVOYS MUST CHANGE LANES, THE TRAIL VEHICLE SHOULD CHANGE LANES FIRST TO SHADOW THE OTHER CONVOY VEHICLES. WHEN WORK CONVOY ENTERS THE ROADWAY, THE TRAIL VEHICLE SHOULD EXIT LAST.
6. VEHICLE SPACING BETWEEN THE TRAIL VEHICLE AND THE SHADOW VEHICLE WILL VARY DEPENDING ON SIGHT DISTANCE RESTRICTIONS AND QUEUE LENGTH. MOTORISTS APPROACHING THE CONVOY SHOULD BE ABLE TO SEE THE TRAIL VEHICLE IN TIME TO SLOW DOWN AND/OR CHANGE LANES AS THEY APPROACH THE TRAIL VEHICLE. VEHICLE SPACING BETWEEN THE WORK VEHICLE AND SHADOW VEHICLE AND VEHICLE SPACING BETWEEN THE WORK VEHICLE AND LEAD VEHICLE MAY VARY ACCORDING TO TERRAIN, WORK ACTIVITY AND OTHER FACTORS.
7. X VEHICLE CONVOY (RZ-2) OR WORK CONVOY (RZ-3) SIGNS SHALL BE USED ON TRAIL VEHICLES AND SHADOW VEHICLES AS SHOWN. AS AN OPTION 48" x 48" DIAMOND SHAPED WORK CONVOY (RZ-2A) OR X VEHICLE CONVOY (RZ-3A) SIGNS MAY BE USED WHERE ADEQUATE MOUNTING SPACE EXISTS. WHEN USED, THE X VEHICLE CONVOY SIGN SHALL HAVE THE NUMBER OF THE CONVOY VEHICLES DISPLAYED ON THE SIGN IN THE NUMBER DESIGNATION "X" LOCATION. THE X VEHICLE CONVOY SIGN SHALL NOT BE USED ON THE SHADOW VEHICLE.
8. FOR DIVIDED HIGHWAYS WITH TWO OR THREE LANES IN ONE DIRECTION, THE APPROPRIATE LEFT LANE CLOSED (RZ-820-BLL) RIGHT LANE CLOSED (RZ-820-SRL) OR CENTER LANE CLOSED (RZ-820-ICL) SIGN SHOULD BE USED ON THE ADVANCE WARNING VEHICLE. AS AN OPTION, A PORTABLE CHANGEABLE MESSAGE SIGN (PCMS) OR TRUCK MOUNTED CHANGEABLE MESSAGE SIGN (TMCM) WITH A MINIMUM CHARACTER HEIGHT OF 12" AND DISPLAYING THE SAME LEGEND MAY BE SUBSTITUTED FOR THESE SIGNS. AN APPROPRIATE DIRECTIONAL ARROW DISPLAY, SHOWING THE SIZE AND LEGIBILITY OF THE ADVANCE WARNING ARROW PANEL MAY BE USED IN THE SECOND PHASE OF THE PCMS/TMCM MESSAGE. WHEN THIS IS DONE, THE ARROW BOARD WILL NOT BE REQUIRED ON THE ADVANCE WARNING VEHICLE.
9. A DOUBLE ARROW SHALL NOT BE DISPLAYED ON THE ADVANCE WARNING ARROW PANEL ON THE ADVANCE WARNING VEHICLE.
10. STANDARD DIAMOND SHAPE VERSIONS OF THE RZ SERIES SIGNS MAY BE USED AS AN OPTION IF THE RECTANGULAR SIGNS SHOWN ARE NOT AVAILABLE.
11. THE ADVANCE WARNING VEHICLE MAY STRADDLE THE EDGE LINE WHEN SHOULDER WIDTH MAKES IT NECESSARY.
12. ON TWO-LANE TWO-WAY ROADWAYS, THE WORK AND PROTECTION VEHICLES SHOULD PULL OVER TO THE SHOULDER TO ALLOW MOTOR VEHICLE TRAFFIC TO PASS. A DO NOT PASS (N-D-N) SIGN SHALL BE PLACED ON THE BACK OF THE REARMOST PROTECTION VEHICLE.
13. MOBILE WORK ZONE METHODS AS DEPICTED IN THIS STANDARD DRAWING SHALL BE UTILIZED ON ALL PROJECTS THAT INCLUDE INSTALLATION OR REMOVAL OF BASED PAVEMENT MARKERS OR PAVEMENT MARKINGS UNLESS APPROVED BY THE ENGINEER ON PROJECTS LESS THAN 0.5 MILE IN LENGTH.
14. NO DIRECT PAYMENT WILL BE MADE FOR COMPLIANCE WITH THE METHODS DEPICTED IN THIS STANDARD DRAWING (WHICH INCLUDES ALL SIGNS, DEVICES, MATERIALS, LABOR, TOOLS, EQUIPMENT, AND INCIDENTALS NECESSARY TO COMPLY) BUT SHALL BE CONSIDERED SUBSIDIARY TO THE MAINTENANCE OF TRAFFIC PAY ITEM.


NOT TO SCALE

JOB NO. A20044


SHEET 10 OF 22
SPECIAL DETAILS

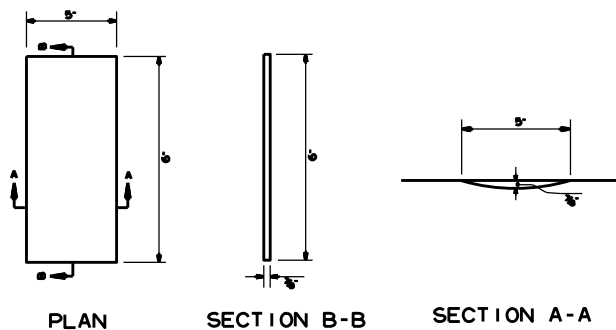


DETAILS OF RUMBLE STRIPE



LOCATION PLAN OF RUMBLE STRIPE
LEFT OR RIGHT SHOULDER

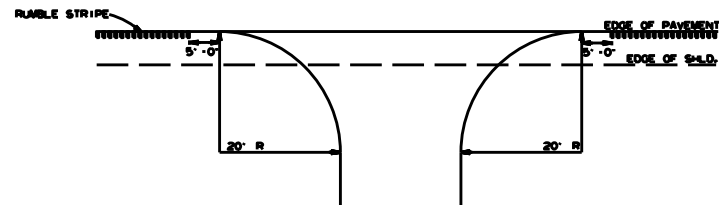


DETAIL FOR RUMBLE STRIPE GAP
AT DRIVEWAY TURNOUTS

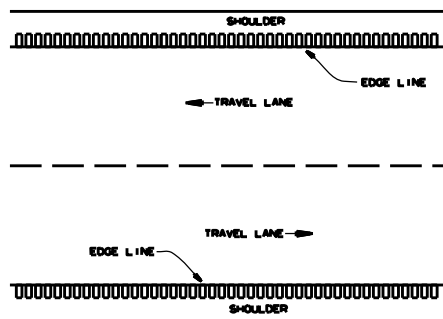

PLAN VIEW


GENERAL NOTES

1. RUMBLE STRIPES SHALL NOT BE INSTALLED ON BRIDGE DECKS, APPROACH SLABS, INTERSECTING STREETS OR ROADWAYS, RESIDENTIAL OR COMMERCIAL DRIVEWAYS OR ACROSS TRANSVERSE JOINTS OF CONCRETE SHOULDERS.
2. RUMBLE STRIPES SHALL NOT BE INSTALLED ON A PAVED SHOULDER THAT IS USED AS A DECELERATION LANE FOR THE LENGTH DEEMED APPROPRIATE BY THE ENGINEER.
3. RUMBLE STRIPES SHALL BE MEASURED BY THE LINEAR FOOT LONGITUDINALLY ALONG THE SHOULDER. PAYMENT SHALL ONLY INCLUDE THAT PORTION OF THE SHOULDER ON WHICH RUMBLE STRIPES HAVE BEEN CONSTRUCTED. NO MEASUREMENT OR PAYMENT WILL BE MADE FOR GAPS, DRIVEWAYS, TURNOUTS, OR OTHER PUBLIC ROAD INTERSECTIONS WHERE RUMBLE STRIPES HAVE NOT BEEN CONSTRUCTED.
4. THE 3/8" DEPTH SHALL GENERALLY APPLY FOR THE ENTIRE 6' LENGTH. SOME VARIATION TO SUIT SHOULDER SLOPE BREAKS MAY BE NECESSARY.




NOTE: GAP PATTERN SHALL BE ADJUSTED BY THE ENGINEER IN THE FIELD ALLOWING FOR DRIVEWAYS TO SERVE AS THE GAP.


DETAIL FOR GAP PATTERN RUMBLE STRIPE

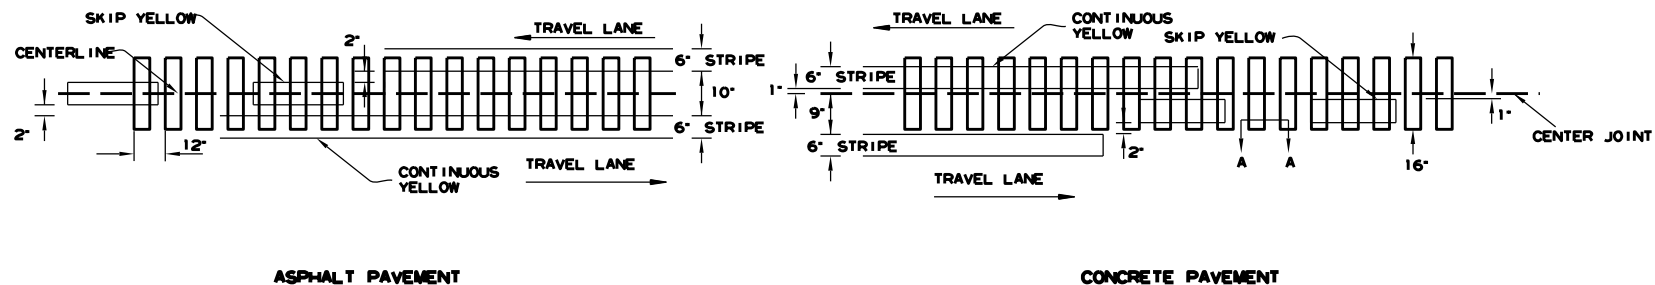

LOCATION PLAN OF CENTERLINE RUMBLE STRIPES

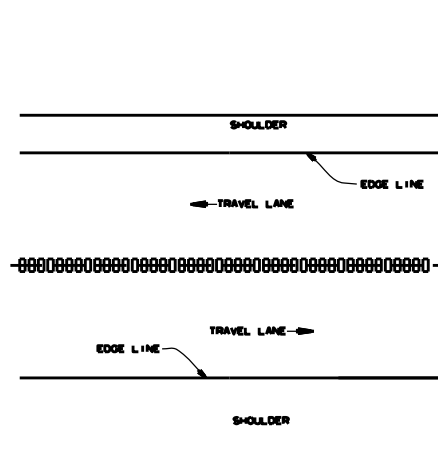


PLAN VIEW

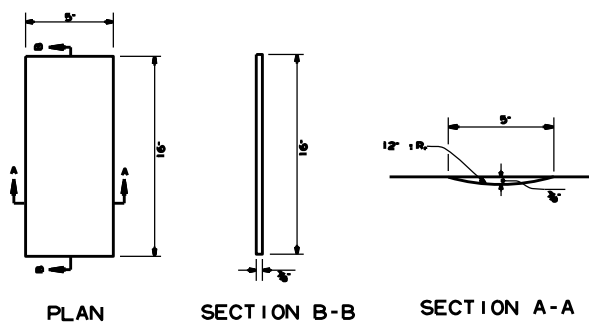

DETAILS OF CENTERLINE RUMBLE STRIPES

GENERAL NOTES


1. RUMBLE STRIPES SHALL NOT BE INSTALLED ON BRIDGE DECKS, APPROACH SLABS, INTERSECTING STREETS OR ROADWAYS, OR ACROSS TRANSVERSE JOINTS OF CONCRETE SHOULDER.
2. RUMBLE STRIPES SHALL BE MEASURED BY THE LINEAR FOOT LONGITUDINALLY ALONG THE CENTERLINE.
3. THE 3/8" DEPTH SHALL GENERALLY APPLY FOR THE ENTIRE 16" LENGTH. SOME VARIATION TO SUIT SLOPE BREAKS MAY BE NECESSARY.

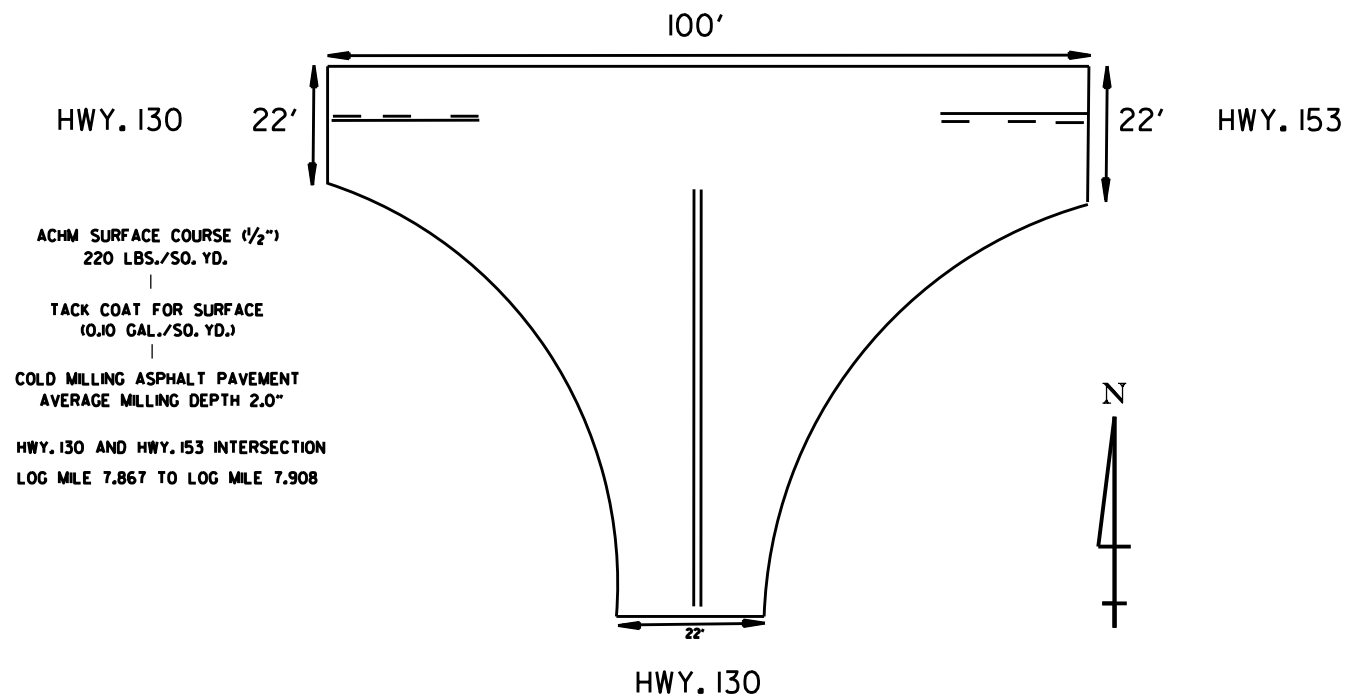

NOT TO SCALE

JOB NO. A20044

SHEET 13 OF 22
SPECIAL DETAILS

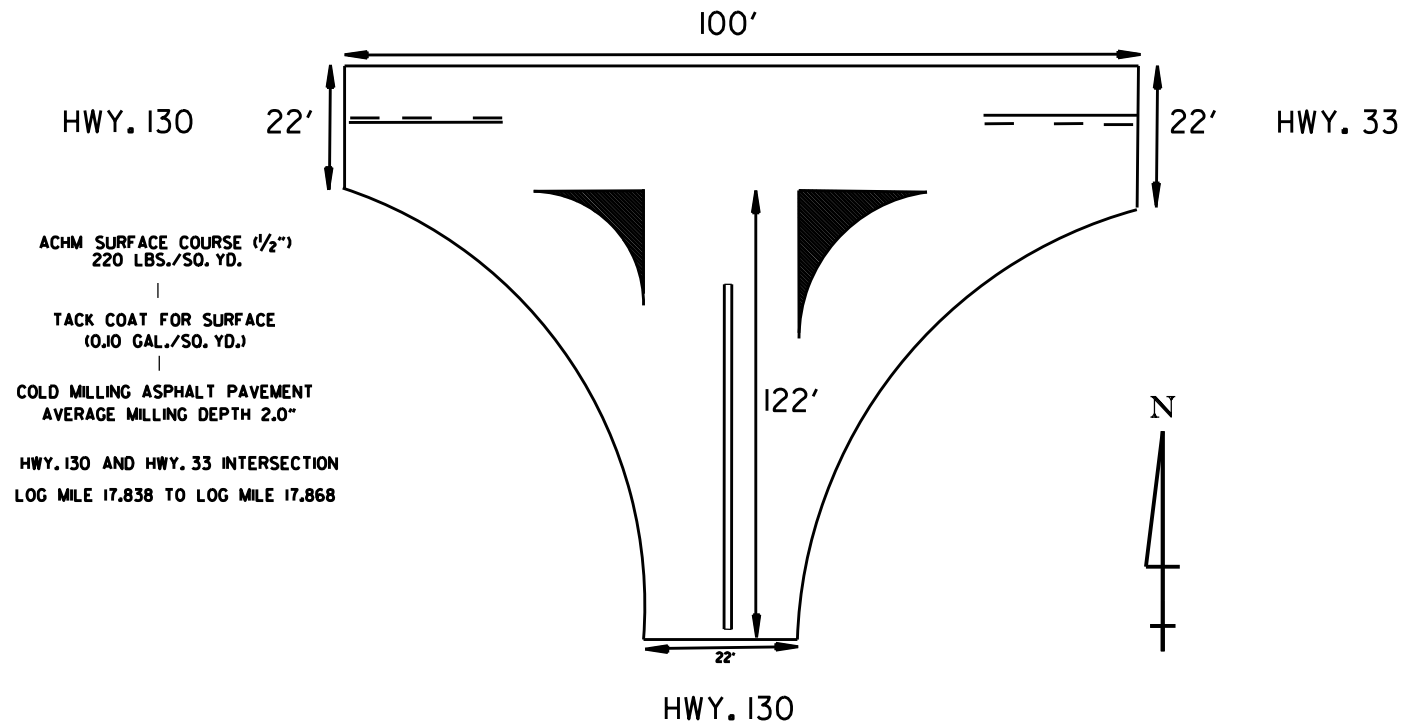


REVISIONS

DATE OF REVISION	REVISION

LEGEND

	SILT FENCE
	SAND BAG DITCH CHECKS

NOTE: DITCH CHECKS SHOULD GENERALLY BE UTILIZED WHERE A ROADSIDE DITCH EXISTS. SILT FENCE SHOULD GENERALLY BE UTILIZED WHERE A ROADSIDE DITCH DOES NOT EXIST.

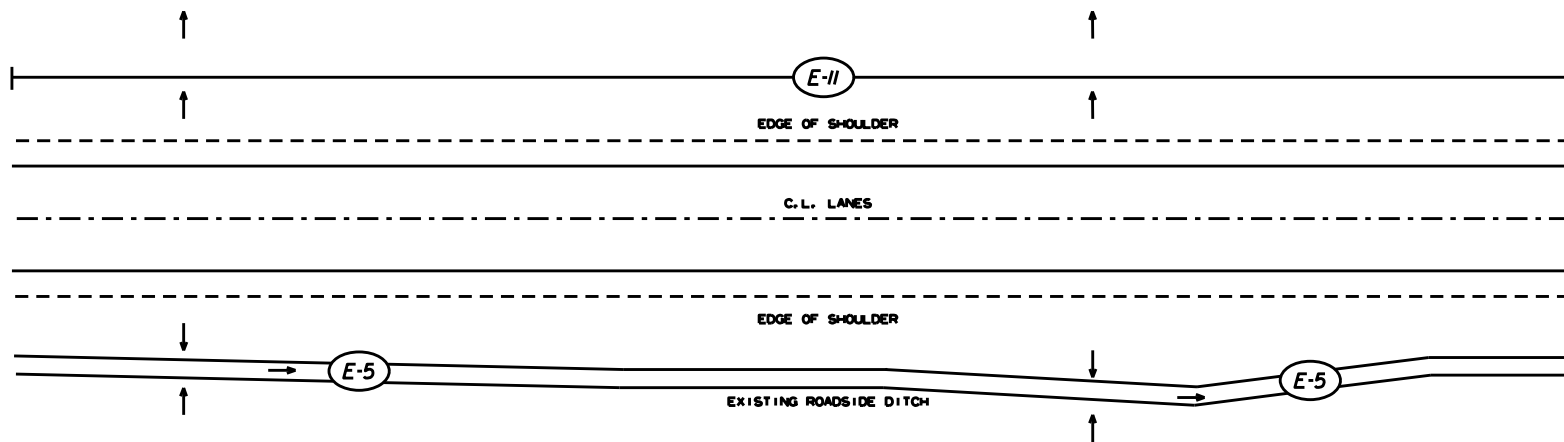

TYPICAL SILT FENCE AND DITCH CHECK INSTALLATION FOR TRENCHING AND SHOULDER PREPARATION

ADVANCE WARNING SIGNS AND DEVICES

SIGN NUMBER	DESCRIPTION	SIGN SIZE	TOTAL SIGNS REQUIRED		VERTICAL PANELS	TRAFFIC DRUMS	* PORTABLE TRAFFIC SIGNAL SYSTEM - ACTUATED WEEK	CONSTRUCTION PROJECT INFORMATION SIGN UPDATE EACH
			NO.	SQ. FT.				
R2-6aP	FINES DOUBLE WHEN WORKERS ARE PRESENT	48"x36"	8	96.0				
W20-1	ROAD WORK 1500 FT.	48"x48"	8	128.0				
W20-1	ROAD WORK 1000 FT.	48"x48"	8	128.0				
W20-1	ROAD WORK 500 FT.	48"x48"	8	128.0				
W20-1	ROAD WORK AHEAD	48"x48"	74	1184.0				
R2-11	END HIGHER FINES ZONE	36"x48"	8	96.0				
G20-2	END ROAD WORK	48"x24"	8	64.0				
G20-1	ROAD WORK NEXT xx MLES	60"x24"	2	20.0				
R4-1	DONOT PASS	24"x30"	39	195.0				
R4-2	PASS WITH CARE	24"x30"	60	300.0				
WZ-4	STATE LAW NO HAND-HELD PHONE USE BY DRIVER WORK ZONE	36"x54"	8	108.0				
W20-4	ONE LANE ROAD 1/2 MILE	48"x48"	14	224.0				
W3-5	REDUCE SPEED ZONE (SPEED LIMIT 45)	48"x48"	14	224.0				
R2-1	SPEED LIMIT 45	36"x48"	14	168.0				
W13-1P	35 MP	30"x30"	14	87.5				
R2-1	SPEED LIMIT 55	36"x48"	14	168.0				
W3-4	BE PREPARED TO STOP	48"x48"	14	224.0				
W20-1	ONE LANE ROAD 1000 FT	48"x48"	14	224.0				
W3-3	SIGNAL AHEAD	48"x48"	14	224.0				
R10-6	STOP HERE ON RED	24"x36"	14	84.0				
SPECIAL	CONSTRUCTION PROJECT INFORMATION SIGN	48"x96"	2	64.0				
	VERTICAL PANELS				80			
	TRAFFIC DRUMS					80		
	PORTABLE TRAFFIC SIGNAL SYSTEM - ACTUATED						21	
	CONSTRUCTION PROJECT INFORMATION SIGN UPDATE							2
TOTALS:				4138.5	80	80	21	2

NOTE: THIS IS A HIGH TRAFFIC VOLUME ROAD AS DEFINED IN SECTION 604.03, STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION.

THE QUANTITY OF VERTICAL PANELS PROVIDED IN THE CONTRACT IS FOR ONE SIDE OF THE ROADWAY FOR THE FULL LENGTH OF THE JOB. THIS IS THE MAXIMUM QUANTITY REQUIRED TO ALLOW THE CONTRACTOR TO NOTCH ONE MILE, BACKFILL TO A POINT WHERE THE VERTICAL DIFFERENTIAL IS 4" OR LESS, AND THEN NOTCH ANOTHER ONE-MILE SECTION. THIS IS THE MAXIMUM NUMBER OF VERTICAL PANELS THAT WILL BE PAID FOR. REFER TO SECTION 603.02 OF THE STANDARD SPECIFICATIONS FOR CONSTRUCTION REQUIREMENTS.

*21 WEEKS WILL BE THE MAXIMUM PAID FOR UNLESS AUTHORIZED BY THE ENGINEER.

*NOTE: PORTABLE TRAFFIC SIGNAL SYSTEM-ACTUATED MUST BE INSTALLED AND PLACED INTO OPERATION JUST PRIOR TO THE EXISTING GUARDRAIL AT ANY BRIDGE END REMOVED. ONCE THE GUARDRAIL AT ANY BRIDGE END IS REMOVED, THE CONTRACTOR WILL HAVE 21 CALENDAR DAYS AT EACH BRIDGE SITE TO COMPLETE WORK ON THE TRANSITION WALLS AND/OR GUTTERS AND INSTALL NEW GUARDRAIL IN THE AREA BEING PROTECTED BY THE PORTABLE TRAFFIC SIGNAL SYSTEM. \$500 A DAY ROAD USER COST WILL BE SCSCESED FOR ANY BRIDGE SITE NOT COMPLETED WITHIN THE 21 CALENDAR DAY LIMIT SPECIFIED. SIGNS NOT IN USE SHALL BE COVERED UNTIL WORK BEGINS AT THAT LOCATION. THE DAILY ROAD USER COST WILL BE ASSESSED FOR EVERY CALENDAR DAY IN EXCESS OF THE ESTABLISHED NUMBER OF SITE CALENDAR DAYS UPP TO AND INCLUDING THE DAY THE SITE IS DETERMINED TO BE SUBSTANTIALLY COMPLETE. THE DAILY ROAD USER COST ASSESSMENT WILL BE DEDUCTED FROM ANY COMPENSATION DUE THE CONTRACTOR OR RECOVERED IF SUFFICIENT COMPENSATION IS NOT DUE.

CONSTRUCTION PAVEMENT MARKINGS AND PERMANENT PAVEMENT MARKINGS

DESCRIPTION	CONSTRUCTION PAVEMENT MARKINGS	REMOVABLE CONSTRUCTION PAVEMENT MARKINGS	RAISED PAVEMENT MARKERS	THERMOPLASTIC PAVEMENT MARKING			REFLECTORIZED PAINT PAVEMENT MARKING	
				6"		24"	10"	
				TYPE II (YEL/YEL)	WHITE	YELLOW LIN. FT.	WHITE	YELLOW
	LIN. FT.	LIN. FT.	EACH					LIN. FT.
CONSTRUCTION PAVEMENT MARKINGS	413168							
REMOVABLE CONSTRUCTION PAVEMENT MARKINGS		5599						
RAISED PAVEMENT MARKERS TYPE II (YEL/YEL)			1578					
THERMOPLASTIC PAVEMENT MARKING WHITE (6")				251328				
THERMOPLASTIC PAVEMENT MARKING YELLOW (6")					161840			
THERMOPLASTIC PAVEMENT MARKING WHITE (24")						110		
REFLECTORIZED PAINT PAVEMENT MARKING WHITE (10")							130	
REFLECTORIZED PAINT PAVEMENT MARKING YELLOW (10")								202
TOTALS:	413168	5599	1578	251328	161840	110	130	202

NOTE: THIS IS A HIGH TRAFFIC VOLUME ROAD AS DEFINED IN SECTION 604.03, STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION.

NOTE: THE PROJECT MUST BE MARKED FOR PASSING/NO PASSING ZONES PRIOR TO THE PLACEMENT OF ANY FINAL STRIPING. CONTACT THE MAINTENANCE DIVISION AFTER THE FINAL LFT OF SURFACE COURSE HAS BEEN PLACED TO SCHEDULE THE ZONING OF THE PROJECT.

REMOVAL AND DISPOSAL OF ITEMS

LOG MILE	LOG MILE	LOCATION	GUARDRAIL
			LIN. FT.
1.804	1.823	MAIN LANES RT. BRIDGE 03371	92
1.804	1.823	MAIN LANES LT. BRIDGE 03371	92
2.291	2.310	MAIN LANES RT. BRIDGE 03372	91
2.291	2.310	MAIN LANES LT. BRIDGE 03372	91
5.865	5.882	MAIN LANES RT. BRIDGE 03373	80
5.865	5.884	MAIN LANES LT. BRIDGE 03373	90
9.433	9.472	MAIN LANES RT. BRIDGE 03374	118
9.433	9.472	MAIN LANES LT. BRIDGE 03374	118
16.066	16.112	MAIN LANES RT. BRIDGE 03376	240
16.066	16.112	MAIN LANES LT. BRIDGE 03376	240
22.330	22.414	MAIN LANES RT. BRIDGE 03377	185
22.330	22.414	MAIN LANES LT. BRIDGE 03377	185
22.598	22.660	MAIN LANES RT. BRIDGE 03378	122
22.598	22.660	MAIN LANES LT. BRIDGE 03378	122
TOTAL:			1866

NOTE: THE QUANTITY SHOWN ABOVE FOR THE REMOVAL AND DISPOSAL OF GUARDRAIL SHALL INCLUDE THE REMOVAL AND DISPOSAL OF ALL GUARDRAIL TERMINALS AND TERMINAL ANCHOR POSTS.

APPROACH GUTTERS

LOG MILE	LOCATION	APPROACH GUTTER (CT)	REINFORCING STEEL-RDWY. (GR. 60)
		CU. YD.	POUND
1.811	BRIDGE 03371 RT. & LT. ('W' =2.67')	3.82	262
1.817	BRIDGE 03371 RT. & LT. ('W' =2.67')	3.82	262
2.298	BRIDGE 03372 RT. & LT. ('W' =2.67')	3.82	262
2.304	BRIDGE 03372 LT. ('W' =2.67')	1.91	131
5.871	BRIDGE 03373 RT. & LT. ('W' =2.67')	3.82	262
5.877	BRIDGE 03373 LT. ('W' =2.67')	1.91	131
9.456	BRIDGE 03374 RT. & LT. ('W' =2.17')	3.26	212
9.467	BRIDGE 03374 RT. & LT. ('W' =2.17')	3.26	212
16.075	BRIDGE 03376 RT. & LT. ('W' =2.67')	3.82	262
16.104	BRIDGE 03376 RT. & LT. ('W' =2.67')	3.82	262
22.366	BRIDGE 03377 RT. & LT. ('W' =2.67')	3.82	262
22.390	BRIDGE 03377 RT. & LT. ('W' =2.67')	3.82	262
22.622	BRIDGE 03378 RT. & LT. ('W' =2.67')	3.82	262
22.634	BRIDGE 03378 RT. & LT. ('W' =2.67')	3.82	262
TOTALS:		48.54	3306

NOTE: USE T=" FOR" SHOULDER.

COLD MILLING ASPHALT PAVEMENT

LOG MILE	LOG MILE	LOCATION	AVG. WIDTH	TOTAL LENGTH	COLD MILLING ASPHALT PAVEMENT
			FEET	FEET	SQ. YD.
0.720	0.774	MAIN LANES BEGIN PROJECT	46.00	100.00	511.11
1.792	1.811	MAIN LANES BRIDGE 03371 APPROACH	22.00	100.00	244.44
1.811	1.817	MAIN LANES BRIDGE 03371 DECK (AVG. DEPTH 2")	24.00	31.00	82.67
1.817	1.835	MAIN LANES BRIDGE 03371 APPROACH	22.00	100.00	244.44
2.279	2.298	MAIN LANES BRIDGE 03372 APPROACH	22.00	100.00	244.44
2.298	2.304	MAIN LANES BRIDGE 03372 DECK (AVG. DEPTH 2")	24.00	31.00	82.67
2.304	2.322	MAIN LANES BRIDGE 03372 APPROACH	22.00	100.00	244.44
9.437	5.871	MAIN LANES BRIDGE 03373 APPROACH	22.00	100.00	244.44
5.871	5.877	MAIN LANES BRIDGE 03373 DECK (AVG. DEPTH 3")	24.00	31.00	82.67
5.877	5.895	MAIN LANES BRIDGE 03373 APPROACH	22.00	100.00	244.44
7.848	7.867	MAIN LANES	22.00	100.00	244.44
7.867	7.908	MAIN LANES INTERSECTION HWY. 130 AND HWY. 153	VAR.	216.00	385.00
7.908	7.926	MAIN LANES	22.00	100.00	244.44
9.437	9.456	MAIN LANES BRIDGE 03374 APPROACH	22.00	100.00	244.44
9.456	9.467	MAIN LANES BRIDGE 03374 DECK (AVG. DEPTH 3")	24.00	57.00	152.00
9.467	9.485	MAIN LANES BRIDGE 03374 APPROACH	22.00	100.00	244.44
16.056	16.075	MAIN LANES BRIDGE 03376 APPROACH	22.00	100.00	244.44
16.075	16.104	MAIN LANES BRIDGE 03376 DECK (AVG. DEPTH 2")	24.00	155.00	413.33
16.104	16.122	MAIN LANES BRIDGE 03376 APPROACH	22.00	100.00	244.44
17.849	17.868	MAIN LANES	22.00	100.00	244.44
17.868	17.838	MAIN LANES INTERSECTION HWY. 130 AND HWY. 33	VAR.	100.00	1595.92
17.838	17.856	MAIN LANES	22.00	100.00	244.44
22.347	22.366	MAIN LANES BRIDGE 03377 APPROACH	22.00	100.00	244.44
22.366	22.390	MAIN LANES BRIDGE 03377 DECK (AVG. DEPTH 1.5")	24.00	124.00	330.67
22.390	22.408	MAIN LANES BRIDGE 03377 APPROACH	22.00	100.00	244.44
22.603	22.622	MAIN LANES BRIDGE 03378 APPROACH	22.00	100.00	244.44
22.622	22.634	MAIN LANES BRIDGE 03378 DECK (AVG. DEPTH 1.5")	24.00	62.00	165.33
22.634	22.652	MAIN LANES BRIDGE 03378 APPROACH	22.00	100.00	244.44
24.501	24.520	MAIN LANES END PROJECT	22.00	100.00	244.44
TOTAL:					8445.73

NOTE: CONTRACTOR WILL TAKE CARE NOT TO MILL INTO THE BRIDGE DECKS.

GUARDRAIL

LOG MILE	LOG MILE	LOCATION	GUARDRAIL (TYPE A)	GUARDRAIL TERMINAL (TYPE 2)	BRIDGE END TERMINAL
			LIN. FT.	EACH	
1.778	1.850	BRIDGE # 03371 RT	206.00	2	
1.765	1.842	BRIDGE # 03371 LT	206.00	2	
2.228	2.305	BRIDGE # 03372 RT*	181.00	1	1
2.252	2.329	BRIDGE # 03372 LT	206.00	2	
5.801	5.878	BRIDGE # 03373 RT**	181.00	1	1
5.825	5.902	BRIDGE # 03373 LT	206.00	2	
9.381	9.476	BRIDGE # 03374 RT	232.00	2	
9.421	9.503	BRIDGE # 03374 LT	232.00	2	
15.992	16.098	BRIDGE # 03376 RT	330.00	2	
16.000	16.106	BRIDGE # 03376 LT	330.00	2	
22.318	22.413	BRIDGE # 03377 RT	299.00	2	
22.342	22.437	BRIDGE # 03377 LT	299.00	2	
22.574	22.657	BRIDGE # 03378 RT	237.00	2	
22.598	22.681	BRIDGE # 03378 LT	237.00	2	
TOTALS:			3382.00	26	2

NOTE: THE FIRST 12' OF GUARDRAIL CONNECTED TO EACH STRUCTURE WILL REQUIRE 8' POSTS.

* NOTE: BRIDGE #3372 BRIDGE END TERMINAL LOG MILE 2.304

** NOTE: BRIDGE #3373 BRIDGE END TERMINAL LOG MILE 5.877

TRENCHING AND SHOULDER PREPARATION

LOG MILE	LOG MILE	LOCATION	LENGTH
			STATIONS
1.702	1.811	MAIN LANES RT. & LT.	6
1.817	2.298	MAIN LANES RT. & LT.	25
2.304	5.871	MAIN LANES RT. & LT.	188
5.877	7.867	MAIN LANES RT. & LT.	105
7.908	9.456	MAIN LANES RT. & LT.	82
9.467	16.075	MAIN LANES RT. & LT.	349
16.104	17.838	MAIN LANES RT. & LT.	92
17.868	22.366	MAIN LANES RT. & LT.	237
22.390	22.622	MAIN LANES RT. & LT.	12
22.634	24.520	MAIN LANES RT. & LT.	100
TOTAL:			1196

RUMBLE STRIPES

LOG MILE	LOG MILE	LOCATION	* RUMBLE STRIPES IN ASPHALT SHOULDERS	* CENTERLINE RUMBLE STRIPES IN ASPHALT ROADWAYS
			LIN. FT.	LIN. FT.
1.739	12.247	MAIN LANES		55482
1.739	12.247	MAIN LANES RT.	44386	
1.739	12.247	MAIN LANES LT.	44386	
12.983	23.666	MAIN LANES		56406
12.983	23.666	MAIN LANES RT.	45125	
12.983	23.666	MAIN LANES LT.	45125	
TOTALS:			179022	111888

* QUANTITY ESTIMATED.
SEE SECTION 104.03 OF THE STD. SPECS.
TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER.

ACHM PATCHING OF EXISTING ROADWAY

DESCRIPTION	TON
ENTIRE PROJECT - TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER	800
TOTAL:	800

NOTE: QUANTITY ESTIMATED.
SEE SECTION 104.03 OF THE STD. SPECS.

ASPHALT CONCRETE PATCHING FOR MAINTENANCE OF TRAFFIC

LOCATION	TON	TACK COAT
		GALLON
ENTIRE PROJECT - TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER	625	1250
TOTALS:	625	1250

EROSION CONTROL

LOG MILE	LOG MILE	LOCATION	PERMANENT EROSION CONTROL				TEMPORARY EROSION CONTROL					
			SEEDING	LIME	MULCH COVER	WATER	TEMPORARY SEEDING	MULCH COVER	WATER	SAND BAG DITCH CHECKS	SILT FENCE	*SEDIMENT REMOVAL & DISPOSAL
			ACRE	TON	ACRE	M.GAL.	ACRE	ACRE	M.GAL.	(E-5) BAG	(E-11) LIN. FT.	CU. YD.
*ENTIRE PROJECT TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER.			11.50	23.00	11.50	1173.0	11.50	11.50	234.6	700	2500	93
TOTALS:			11.50	23.00	11.50	1173.0	11.50	11.50	234.6	700	2500	93

BASIS OF ESTIMATE:
SEEDING 2 FT. EACH SIDE FOR THE LENGTH OF TRENCHING AND SHOULDER PREPARATION
LIME 2 TONS / ACRE OF SEEDING
WATER 102.0 M.G. / ACRE OF SEEDING
WATER 20.4 M.G. / ACRE OF TEMPORARY SEEDING

*QUANTITIES ESTIMATED.
SEE SECTION 104.03 OF THE STD. SPECS.

NOTE: THE TEMPORARY EROSION CONTROL DEVICES SHOWN ABOVE AND ON THE PLANS SHALL BE INSTALLED IN SUCH A SEQUENCE AS TO DETER EROSION AND SEDIMENTATION ON U.S. WATERWAYS AS EXPLAINED BY THE NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT.

DRIVEWAYS & TURNOUTS (BOX 1 OF 4)

LOG MILE	SIDE	LOCATION	WIDTH	ACHM SURFACE COURSE (1/2") 220 LBS. PER SQ. YD. (PG 70-22)		TACK COAT		
				FEET	SQ. YD.	TON	GALLONS/ SQ. YD.	GALLON
0.736	LT.	MAIN LANES	40	14.00	1.54	0.10	1.40	
0.774	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73	
0.810	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73	
0.813	RT.	MAIN LANES	22	8.00	0.88	0.10	0.80	
0.812	RT.	MAIN LANES	22	8.00	0.88	0.10	0.80	
0.831	LT.	MAIN LANES	40	15.00	1.65	0.10	1.50	
0.850	RT.	MAIN LANES	18	6.67	0.73	0.10	0.67	
0.869	LT.	MAIN LANES	15	5.67	0.62	0.10	0.57	
0.870	RT.	MAIN LANES	18	6.67	0.73	0.10	0.67	
0.872	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73	
0.887	RT.	MAIN LANES	18	6.67	0.73	0.10	0.67	
0.907	LT.	MAIN LANES	40	15.00	1.65	0.10	1.50	
0.925	RT.	MAIN LANES	27	9.67	1.06	0.10	0.97	
0.945	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60	
0.950	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60	
0.951	RT.	MAIN LANES	40	15.00	1.65	0.10	1.50	
0.983	LT.	MAIN LANES	40	15.00	1.65	0.10	1.50	
1.020	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73	
1.011	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60	
1.020	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60	
1.039	RT.	MAIN LANES	18	6.67	0.73	0.10	0.67	
1.058	RT.	MAIN LANES	18	6.67	0.73	0.10	0.67	
1.077	RT.	MAIN LANES	23	8.33	0.92	0.10	0.83	
1.078	LT.	MAIN LANES	26	9.33	1.03	0.10	0.93	
1.092	LT.	MAIN LANES	40	15.00	1.65	0.10	1.50	
1.105	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73	
1.115	LT.	MAIN LANES	15	5.67	0.62	0.10	0.57	
1.215	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73	
1.134	RT.	MAIN LANES	40	15.00	1.65	0.10	1.50	
1.153	LT.	MAIN LANES	40	15.00	1.65	0.10	1.50	
1.172	RT.	MAIN LANES	22	8.00	0.88	0.10	0.80	
1.191	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60	
1.229	LT.	MAIN LANES	40	15.00	1.65	0.10	1.50	
1.248	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73	
1.280	RT.	MAIN LANES	20	11.67	1.28	0.10	1.17	
1.437	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73	
1.438	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73	
1.494	RT.	MAIN LANES	30	11.67	1.28	0.10	1.17	
1.495	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73	
1.513	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73	
1.701	RT.	MAIN LANES	30	11.67	1.28	0.10	1.17	
1.702	LT.	MAIN LANES	30	11.67	1.28	0.10	1.17	
2.176	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60	
2.309	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73	
2.403	LT.	MAIN LANES	30	10.67	1.17	0.10	1.07	
2.498	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60	
2.517	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60	
2.706	RT.	MAIN LANES	30	11.67	1.28	0.10	1.17	
2.075	LT.	MAIN LANES	20	8.33	0.92	0.10	0.83	
2.075	RT.	MAIN LANES	30	11.67	1.28	0.10	1.17	
2.763	LT.	MAIN LANES	21	7.67	0.84	0.10	0.77	
3.426	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60	
3.464	RT.	MAIN LANES	25	9.00	0.99	0.10	0.90	
3.558	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60	
3.729	RT.	MAIN LANES	30	11.67	1.28	0.10	1.17	
3.729	LT.	MAIN LANES	30	11.67	1.28	0.10	1.17	
3.899	LT.	MAIN LANES	20	8.33	0.92	0.10	0.83	
3.937	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73	
4.297	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73	
4.335	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73	
4.789	RT.	MAIN LANES	30	10.67	1.17	0.10	1.07	
4.846	LT.	MAIN LANES	25	9.00	0.99	0.10	0.90	
4.922	LT.	MAIN LANES	25	9.00	0.99	0.10	0.90	
5.339	LT.	MAIN LANES	25	10.00	1.10	0.10	1.00	
TOTALS (BOX 1 OF 4):					576.00	63.36		57.60

BASIS OF ESTIMATE:

ACHM SURFACE COURSE (1/2").....94.3% MIN. AGGR.....5.7% ASPHALT BINDER

DRIVEWAYS & TURNOUTS (BOX 2 OF 4)

LOG MILE	SIDE	LOCATION	WIDTH	ACHM SURFACE COURSE (1/2") 220 LBS. PER SQ. YD. (PG 70-22)		TACK COAT	
				FEET	SQ. YD.	TON	GALLONS/ SQ. YD.
5.850	RT.	MAIN LANES	25	10.00	1.10	0.10	1.00
5.869	LT.	MAIN LANES	25	10.00	1.10	0.10	1.00
6.096	LT.	MAIN LANES	18	6.67	0.73	0.10	0.67
6.380	LT.	MAIN LANES	40	14.00	1.54	0.10	1.40
6.381	RT.	MAIN LANES	18	6.67	0.73	0.10	0.67
6.418	RT.	MAIN LANES	30	10.67	1.17	0.10	1.07
6.437	LT.	MAIN LANES	40	15.00	1.65	0.10	1.50
6.475	RT.	MAIN LANES	18	6.67	0.73	0.10	0.67
6.494	LT.	MAIN LANES	18	6.67	0.73	0.10	0.67
6.513	RT.	MAIN LANES	18	6.67	0.73	0.10	0.67
6.645	RT.	MAIN LANES	35	13.33	1.47	0.10	1.33
6.702	RT.	MAIN LANES	25	10.00	1.10	0.10	1.00
6.721	RT.	MAIN LANES	30	11.67	1.28	0.10	1.17
6.892	LT.	MAIN LANES	22	8.00	0.88	0.10	0.80
7.100	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
7.403	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
7.630	RT.	MAIN LANES	30	10.67	1.17	0.10	1.07
7.706	RT.	MAIN LANES	35	12.33	1.36	0.10	1.23
7.820	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
7.858	RT	MAIN LANES	20	7.33	0.81	0.10	0.73
7.946	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
7.946	LT.	MAIN LANES	22	8.00	0.88	0.10	0.80
8.136	LT.	MAIN LANES	18	6.67	0.73	0.10	0.67
8.401	RT.	MAIN LANES	18	6.67	0.73	0.10	0.67
8.401	RT.	MAIN LANES	18	6.67	0.73	0.10	0.67
8.912	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
8.912	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
9.083	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
9.424	LT.	MAIN LANES	18	6.67	0.73	0.10	0.67
9.613	RT.	MAIN LANES	30	10.67	1.17	0.10	1.07
9.613	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
9.916	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
9.916	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
10.162	LT.	MAIN LANES	40	14.00	1.54	0.10	1.40
10.408	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
10.408	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
10.560	LT.	MAIN LANES	25	9.00	0.99	0.10	0.90
10.806	LT.	MAIN LANES	18	6.67	0.73	0.10	0.67
10.920	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
10.920	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
11.071	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
11.090	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
11.109	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
11.393	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
11.412	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
11.431	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
11.469	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
11.507	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
11.526	LT.	MAIN LANES	40	14.00	1.54	0.10	1.40
11.545	LT.	MAIN LANES	40	14.00	1.54	0.10	1.40
11.924	RT.	MAIN LANES	40	15.00	1.65	0.10	1.50
12.018	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
12.416	LT.	MAIN LANES	30	11.67	1.28	0.10	1.17
12.568	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
12.586	LT.	MAIN LANES	18	6.67	0.73	0.10	0.67
12.605	LT.	MAIN LANES	18	6.67	0.73	0.10	0.67
12.624	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
12.630	RT.	MAIN LANES	30	11.67	1.28	0.10	1.17
12.630	LT.	MAIN LANES	30	11.67	1.28	0.10	1.17
12.705	LT.	MAIN LANES	30	11.67	1.28	0.10	1.17
12.781	LT.	MAIN LANES	30	11.67	1.28	0.10	1.17
12.785	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
12.800	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
TOTALS (BOX 2 OF 4):				542.00	59.62		54.20

BASIS OF ESTIMATE:

ACHM SURFACE COURSE (1/2").....94.3% MIN. AGGR.....5.7% ASPHALT BINDER

DRIVEWAYS & TURNOUTS (BOX 3 OF 4)							
LOG MILE	SIDE	LOCATION	WIDTH	ACHM SURFACE COURSE (1/2") 220 LBS. PER SQ. YD. (PG 70-22)		TACK COAT	
				FEET	SQ. YD.	TON	GALLONS/ SQ. YD.
13.368	LT.	MAIN LANES	40	15.00	1.65	0.10	1.50
13.444	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
13.842	RT.	MAIN LANES	40	16.67	1.83	0.10	1.67
14.031	LT.	MAIN LANES	20	8.33	0.92	0.10	0.83
14.164	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
14.164	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
14.239	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
14.353	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
14.353	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
14.410	LT.	MAIN LANES	60	26.67	2.93	0.10	2.67
14.599	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
14.637	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
14.656	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
14.656	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
14.864	RT.	MAIN LANES	40	16.67	1.83	0.10	1.67
14.864	LT.	MAIN LANES	40	16.67	1.83	0.10	1.67
14.148	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
14.148	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
15.433	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
15.433	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
15.470	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
15.565	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
15.622	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
15.698	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
15.755	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
15.8307	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
16.323	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
16.361	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
16.683	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
16.683	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
16.701	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
16.720	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
16.853	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
16.853	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
16.967	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
17.023	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
17.289	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
17.308	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
17.364	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
17.611	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
17.611	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
17.800	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
18.266	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
18.683	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
18.721	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
18.740	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
18.948	RT.	MAIN LANES	40	14.00	1.54	0.10	1.40
18.948	LT.	MAIN LANES	40	14.00	1.54	0.10	1.40
18.986	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
19.232	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
19.270	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
19.459	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
19.478	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
19.478	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
19.971	RT.	MAIN LANES	30	11.67	1.28	0.10	1.17
19.971	LT.	MAIN LANES	30	11.67	1.28	0.10	1.17
20.028	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
20.084	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
20.387	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
20.425	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
20.444	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
20.463	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
20.823	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
TOTALS (BOX 3 OF 4):				510.58	56.26		50.98

BASIS OF ESTIMATE:
ACHM SURFACE COURSE (1/2").....94.3% MIN. AGGR.....5.7% ASPHALT BINDER

DRIVEWAYS & TURNOUTS (BOX 4 OF 4)							
LOG MILE	SIDE	LOCATION	WIDTH	ACHM SURFACE COURSE (1/2") 220 LBS. PER SQ. YD. (PG 70-22)		TACK COAT	
				FEET	SQ. YD.	TON	GALLONS/ SQ. YD.
20.880	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
20.899	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
21.102	RT.	MAIN LANES	30	13.33	1.47	0.10	1.33
21.012	LT.	MAIN LANES	30	13.33	1.47	0.10	1.33
21.145	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
21.145	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
21.278	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
21.334	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
21.372	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
21.372	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
21.429	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
21.448	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
21.486	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
21.524	RT.	MAIN LANES	30	13.33	1.47	0.10	1.33
21.543	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
21.562	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
21.581	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
21.581	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
21.675	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
21.675	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
21.751	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
21.751	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
21.770	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
21.903	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
21.921	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
21.958	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
22.035	LT.	MAIN LANES	30	13.33	1.47	0.10	1.33
22.054	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
22.073	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
22.092	LT.	MAIN LANES	20	10.00	1.10	0.10	1.00
22.111	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
22.149	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
22.300	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
22.319	LT.	MAIN LANES	40	14.00	1.54	0.10	1.40
22.831	RT.	MAIN LANES	30	13.33	1.47	0.10	1.33
22.831	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
22.887	LT.	MAIN LANES	30	13.33	1.47	0.10	1.33
22.963	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
23.001	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
23.058	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
23.096	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
23.228	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
23.228	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
23.285	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
23.323	RT.	MAIN LANES	16	6.00	0.66	0.10	0.60
23.380	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
23.399	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
23.456	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
23.456	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
23.531	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
23.569	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
23.588	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
23.645	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
23.683	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
23.740	RT.	MAIN LANES	20	10.00	1.10	0.10	1.00
23.796	LT.	MAIN LANES	30	13.33	1.47	0.10	1.33
23.834	RT.	MAIN LANES	20	7.33	0.81	0.10	0.73
23.853	RT.	MAIN LANES	30	13.33	1.47	0.10	1.33
23.872	RT.	MAIN LANES	18	6.67	0.73	0.10	0.67
23.910	LT.	MAIN LANES	20	7.33	0.81	0.10	0.73
23.948	RT.	MAIN LANES	30	13.33	1.47	0.10	1.33
23.948	LT.	MAIN LANES	16	6.00	0.66	0.10	0.60
24.005	RT.	MAIN LANES	30	13.33	1.47	0.10	1.33
24.024	RT.	MAIN LANES	30	13.33	1.47	0.10	1.33
24.118	RT.	MAIN LANES	30	13.33	1.47	0.10	1.33
24.118	LT.	MAIN LANES	30	13.33	1.47	0.10	1.33
24.270	RT.	MAIN LANES	30	13.33	1.47	0.10	1.33
24.270	LT.	MAIN LANES	30	13.33	1.47	0.10	1.33
24.346	RT.	MAIN LANES	30	13.33	1.47	0.10	1.33
24.346	LT.	MAIN LANES	30	13.33	1.47	0.10	1.33
TOTALS (BOX 1 OF 4):					576.00	63.36	57.60
TOTALS (BOX 2 OF 4):					542.00	59.62	54.20
TOTALS (BOX 3 OF 4):					510.58	56.26	56.98
TOTALS (BOX 4 OF 4):					585.22	64.50	56.42
TOTALS:					2213.80	243.74	221.20

BASIS OF ESTIMATE:
ACHM SURFACE COURSE (1/2").....94.3% MIN. AGGR.....5.7% ASPHALT BINDER

BASE AND SURFACING

LOG MILE	LOG MILE	LOCATION	LENGTH	AGGREGATE BASE COURSE (CLASS 7)		TACK COAT				ACHM BINDER COURSE (1")				ACHM SURFACE COURSE (1/2")			
				TON / STATION	TON	AVG. WID. FEET	SQ.YD.	GALLONS / SQ.YD.	GALLON	AVG. WID. FEET	SQ.YD.	POUND / SQ.YD.	PG 70-22 TON	AVG. WID. FEET	SQ.YD.	POUND / SQ.YD.	PG 70-22 TON
			FEET														
MAIN LANES																	
0.720	0.755	MAIN LANES	184.80	5.00	9.24	40.00	821.33	0.10	82.13					40.00	821.33	220.00	90.35
0.755	1.702	MAIN LANES	5000.16	5.00	250.01	26.00	14444.91	0.10	1444.49					26.00	14444.91	220.00	1588.94
1.702	1.811	MAIN LANES TRENCH & WIDENING	575.52	7.00	40.29	4.00	255.79	0.05	12.79	4.33	276.89	440.00	60.92				
1.702	1.811	MAIN LANES	575.52			22.00	1406.83	0.10	140.68					26.00	1662.61	220.00	182.69
1.811	1.817	BRIDGE # 03371	31.68														
1.817	2.298	MAIN LANES TRENCH & WIDENING	2539.68	7.00	177.78	4.00	1128.75	0.05	56.44	4.33	1221.87	440.00	268.81				
1.817	2.298	MAIN LANES	2539.68			22.00	6208.11	0.10	620.81					26.00	7336.85	220.00	807.05
2.298	2.304	BRIDGE # 03372	31.68														
2.304	5.871	MAIN LANES TRENCH & WIDENING	18833.76	7.00	1318.36	4.00	8370.56	0.05	418.53	4.33	9061.13	440.00	1993.45				
2.304	5.871	MAIN LANES	18833.76			22.00	46038.08	0.10	4603.81					26.00	54408.64	220.00	5984.95
5.871	5.877	BRIDGE # 03373	31.68														
5.877	7.867	MAIN LANES TRENCH & WIDENING	10507.20	7.00	735.50	4.00	4669.87	0.05	233.49	4.33	5055.13	440.00	1112.13				
5.877	7.867	MAIN LANES	10507.20			22.00	25684.27	0.10	2568.43					26.00	30354.13	220.00	3338.95
7.867	7.908	INTERSECTION OF HWY. 130 AND HWY. 153	216.48	7.00	15.15	4.00	385.00	0.05	19.25	4.33	104.15	440.00	22.91				
7.867	7.908	INTERSECTION OF HWY. 130 AND HWY. 153	216.48			VAR.	385.00	0.10	38.50					VAR.	385.00	220.00	42.35
7.908	9.456	MAIN LANES TRENCH & WIDENING	8173.44	7.00	572.14	4.00	3632.64	0.05	181.63	4.33	3932.33	440.00	865.11				
7.908	9.456	MAIN LANES	8173.44			22.00	19979.52	0.10	1997.95					26.00	23612.16	220.00	2597.34
9.456	9.467	BRIDGE # 03374	58.08														
9.467	16.075	MAIN LANES TRENCH & WIDENING	34890.24	7.00	2442.32	4.00	15506.77	0.05	775.34	4.33	16786.08	440.00	3692.94				
9.467	16.075	MAIN LANES	34890.24			22.00	85287.25	0.10	8528.73					26.00	100794.03	220.00	11087.34
16.075	16.104	BRIDGE # 03376	153.12														
16.104	17.838	MAIN LANES TRENCH & WIDENING	9155.52	7.00	640.69	4.00	4069.12	0.05	203.46	4.33	4404.82	440.00	969.06				
16.104	17.838	MAIN LANES	9155.52			22.00	22380.16	0.10	2238.02					26.00	26449.28	220.00	2909.42
17.838	17.868	INTERSECTION OF HWY. 130 AND HWY. 33	158.40	7.00	11.09	4.00	1595.92	0.05	79.80	4.33	76.21	440.00	16.77				
17.838	17.868	INTERSECTION OF HWY. 130 AND HWY. 33	158.40			VAR.	1595.92	0.10	159.59					VAR.	1595.92	220.00	175.55
17.868	22.366	MAIN LANES TRENCH & WIDENING	23749.44	7.00	1662.46	4.00	10555.31	0.05	527.77	4.33	11426.12	440.00	2513.75				
17.868	22.366	MAIN LANES	23749.44			22.00		0.10						26.00	68609.49	220.00	7547.04
22.366	22.390	BRIDGE # 03377	126.72														
22.390	22.622	MAIN LANES TRENCH & WIDENING	1224.96	7.00	85.75	4.00	544.43	0.05	27.22	4.33	589.34	440.00	129.65				
22.390	22.622	MAIN LANES	1224.96			22.00	3538.77	0.10	353.88					26.00	3538.77	220.00	389.26
22.622	22.634	BRIDGE # 03378	63.36														
22.634	24.520	MAIN LANES TRENCH & WIDENING	9958.08	7.00	697.07	4.00	4425.81	0.05	221.29	4.33	4790.94	440.00	1054.01				
22.634	24.520	MAIN LANES	9958.08			22.00	24341.97	0.10	2434.20					26.00	28767.79	220.00	3164.46
ADDITIONAL FOR GUARDRAIL WIDENING																	
1.773	1.811	BRIDGE # 03371 RT.	225.00	18.70	42.08									5.50	137.50	220.00	15.13
1.792	1.811	BRIDGE # 03371 LT.	100.00	18.70	18.70									5.50	61.11	220.00	6.72
1.817	1.835	BRIDGE # 03371 RT.	100.00	18.70	18.70									5.50	61.11	220.00	6.72
1.817	1.854	BRIDGE # 03371 LT.	225.00	18.70	42.08									5.50	137.50	220.00	15.13
2.261	2.298	BRIDGE # 03372 RT.	225.00	18.70	42.08									5.50	137.50	220.00	15.13
2.280	2.298	BRIDGE # 03372 LT.	100.00	18.70	18.70									5.50	61.11	220.00	6.72
2.304	2.341	BRIDGE # 03372 LT.	225.00	18.70	42.08									5.50	137.50	220.00	15.13
5.834	5.871	BRIDGE # 03373 RT.	225.00	18.70	42.08									5.50	137.50	220.00	15.13
5.853	5.871	BRIDGE # 03373 LT.	100.00	18.70	18.70									5.50	61.11	220.00	6.72
5.877	5.914	BRIDGE # 03373 LT.	225.00	18.70	42.08									5.50	137.50	220.00	15.13
9.419	9.456	BRIDGE # 03374 RT.	225.00	18.70	42.08									5.50	137.50	220.00	15.13
9.438	9.456	BRIDGE # 03374 LT.	100.00	18.70	18.70									5.50	61.11	220.00	6.72
9.467	9.449	BRIDGE # 03374 RT.	100.00	18.70	18.70									5.50	61.11	220.00	6.72
9.467	9.504	BRIDGE # 03374 LT.	225.00	18.70	42.08									5.50	137.50	220.00	15.13
16.038	16.075	BRIDGE # 03376 RT.	225.00	18.70	42.08									5.50	137.50	220.00	15.13
16.057	16.075	BRIDGE # 03376 LT.	100.00	18.70	18.70									5.50	61.11	220.00	6.72
16.104	16.122	BRIDGE # 03376 RT.	100.00	18.70	18.70									5.50	61.11	220.00	6.72
16.104	16.141	BRIDGE # 03376 LT.	225.00	18.70	42.08									5.50	137.50	220.00	15.13
22.318	22.366	BRIDGE # 03377 RT.	225.00	18.70	42.08									5.50	137.50	220.00	15.13
22.342	22.366	BRIDGE # 03377 LT.	100.00	18.70	18.70									5.50	61.11	220.00	6.72
22.390	22.413	BRIDGE # 03377 RT.	100.00	18.70	18.70									5.50	61.11	220.00	6.72
22.930	22.437	BRIDGE # 03377 LT.	225.00	18.70	42.08									5.50	137.50	220.00	15.13
22.574	22.622	BRIDGE # 03378 RT.	225.00	18.70	42.08									5.50	137.50	220.00	15.13
22.598	22.622	BRIDGE # 03378 LT.	100.00	18.70	18.70									5.50	61.11	220.00	6.72
22.634	22.657	BRIDGE # 03378 RT.	100.00	18.70	18.70									5.50	61.11	220.00	6.72
22.634	22.681	BRIDGE # 03378 LT.	225.00	18.70	42.08									5.50	137.50	220.00	15.13
ADDITIONAL FOR SPOT LEVELING (AS DIRECTED BY ENGINEER)																	
ENTIRE PROJECT		MAIN LANES RT. & LT.				22.00	VAR.	0.10	3636.36					22.00	VAR.	220.00	4000.00
TOTALS:					9471.57		307252.09		31604.59		57725.01		12699.51		365439.23		44198.35

BASIS OF ESTIMATE:
 ACHM SURFACE COURSE (1/2")..... 94.3% MIN. AGGR..... 5.7% ASPHALT BINDER
 ACHM BINDER COURSE (1")..... 95.2% MIN. AGGR..... 4.8% ASPHALT BINDER
 TACK COAT QUANTITIES WERE CALCULATED USING THE EMULSIFIED ASPHALT RATES. REFER TO SS-400-1 FOR THE RESIDUAL ASPHALT APPLICATION RATES.

ITEM NUMBER	ITEM	QUANTITY	UNIT
202	REMOVAL AND DISPOSAL OF GUARDRAIL	1866	LIN. FT.
SP & 215	TRENCHING AND SHOULDER PREPARATION	1196	STATION
SP, SS, & 303	AGGREGATE BASE COURSE (CLASS 7)	9472	TON
SS & 401	TACK COAT	33076	GAL.
SP, SS, & 406	MINERAL AGGREGATE IN ACHM BINDER COURSE (1")	12090	TON
SP, SS, & 406	ASPHALT BINDER (PG 70-22) IN ACHM BINDER COURSE (1")	610	TON
SP, SS, & 407	MINERAL AGGREGATE IN ACHM SURFACE COURSE (1/2")	41909	TON
SP, SS, & 407	ASPHALT BINDER (PG 70-22) IN ACHM SURFACE COURSE (1/2")	2533	TON
SP & 412	COLD MILLING ASPHALT PAVEMENT	8446	SQ. YD.
SP, SS, & 414	ASPHALT CONCRETE PATCHING FOR MAINTENANCE OF TRAFFIC	625	TON
SP, SS, & 415	ACHM PATCHING OF EXISTING ROADWAY	800	TON
SP, SS, & 504	APPROACH GUTTERS	48.54	CU. YD.
601	MOBILIZATION	1.00	LUMP SUM
SS & 603	MAINTENANCE OF TRAFFIC	1.00	LUMP SUM
SS & 604	SIGNS	4139	SQ. FT.
SP, SS, & 604	CONSTRUCTION PROJECT INFORMATION SIGN UPDATE	2	EACH
SS & 604	TRAFFIC DRUMS	80	EACH
604	CONSTRUCTION PAVEMENT MARKINGS	413168	LIN. FT.
604	REMOVABLE CONSTRUCTION PAVEMENT MARKINGS	5599	LIN. FT.
SS & 604	VERTICAL PANELS	80	EACH
SS & 617	GUARDRAIL (TYPE A)	3382	LIN. FT.
SS & 617	GUARDRAIL TERMINAL (TYPE 2)	26	EACH
620	LIME	23	TON
620	SEEDING	11.50	ACRE
SS & 620	MULCH COVER	23.00	ACRE
620	WATER	1407.6	M. GAL.
621	TEMPORARY SEEDNG	11.50	ACRE
621	SILT FENCE	2500	LIN. FT.
621	SAND BAG DITCH CHECKS	700	BAG
621	SEDIMENT REMOVAL AND DISPOSAL	93	CU. YD.
SP & 635	ROADWAY CONSTRUCTION CONTROL	1.00	LUMP SUM
SP & 642	RUMBLE STRIPES IN ASPHALT SHOULDERS	179022	LIN. FT.
SP & 642	CENTERLINE RUMBLE STRIPES IN ASPHALT ROADWAYS	111888	LIN. FT.
SP	PORTABLE TRAFFIC SIGNAL SYSTEM - ACTUATED	21	WEEK
718	REFLECTORIZED PAINT PAVEMENT MARKING WHITE (10")	130	LIN. FT.
718	REFLECTORIZED PAINT PAVEMENT MARKING YELLOW (10")	202	LIN. FT.
719	THERMOPLASTIC PAVEMENT MARKING WHITE (6")	251328	LIN. FT.
719	THERMOPLASTIC PAVEMENT MARKING WHITE (24")	110	LIN. FT.
719	THERMOPLASTIC PAVEMENT MARKING YELLOW (6")	161840	LIN. FT.
721	RAISED PAVEMENT MARKERS (TYPE II)	1578	EACH
SS & 734	BRIDGE END TERMINAL	2	EACH
SS & 804	REINFORCING STEEL-ROADWAY (GRADE 60)	3306	POUND

[illegible]

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.				

① - TYPE CT GUTTERS - 55039

- ① Square approach gutter is shown. Modify approach gutter as necessary to accommodate a bridge on a skew. See "DETAIL Y."
- ② Match existing conditions at bridge end.
- ③ Vary post height, as necessary, to match height of existing w-beam bridge rail.

GENERAL NOTES

This drawing shall only be used as a retrofit of an existing bridge end where an existing curb creates a snag point.

Concrete shall be Class 5 or S(AE) or mixture used for Portland Cement Concrete Pavement.


Reinforcing steel shall be Grade 60 ($f_y = 60,000$ psi.) conforming to AASHTO M 31 or M 322, Type A, with mill test reports. Fabricate bar lengths to provide 2" minimum cover at each end.

Approach gutters will be measured and paid for in accordance with Section 504.


Preformed Joint and Poured Joint Sealer Included In the Item "Approach Gutters".

All longitudinal lines within the limits of horizontal curves shall be on curves concentric to C.L. Bridge. Adjustment to longitudinal bar lengths may be required. Transverse reinforcing shall be placed on radial lines to C.L. Bridge.

If an existing drop inlet is located within the Plan of the approach gutter, adjust the reinforcing as needed to facilitate construction of the approach gutter, unless otherwise noted.

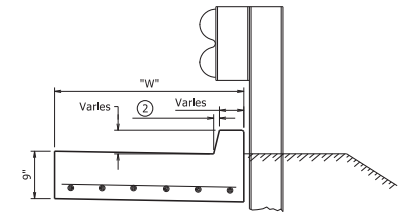


SECTION B-B
1" = 1'-0"

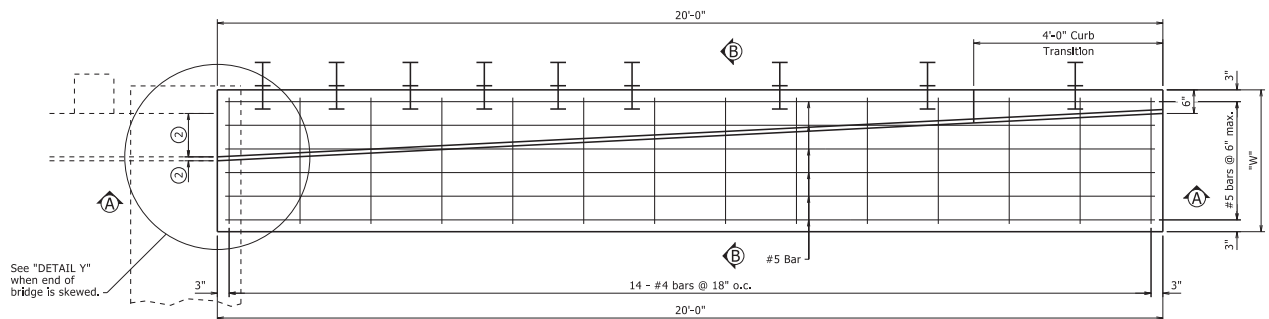

PLAN OF APPROACH GUTTER
3/4" = 1'-0"

Remove the existing terminal section as needed and attach a new guard rail to the existing guard rail on the bridge.

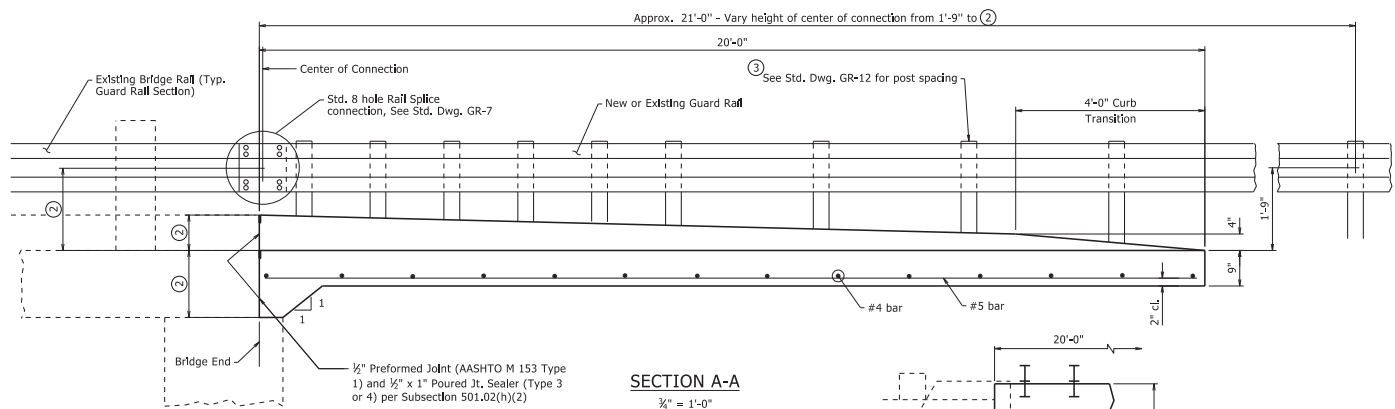


SECTION A-A
3/4" = 1'-0"

APPROXIMATE QUANTITIES FOR ONE SQUARE 20'-0" APPROACH GUTTER

Concrete (Cu. Yd.)	$(W \times 0.56) + 0.41$
Reinforcing Steel (lb.)	$(W \times 50.38) - 3.11$

Variables: Units of "W" are in feet.

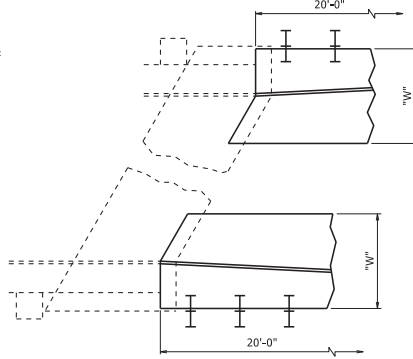

DETAIL Y
No Scale

This document was originally issued and sealed by Charles R. Ellis, PE No. 9235, on November 7, 2019. This copy is not a signed and sealed document.




BRIDGE ENGINEER

STANDARD DETAILS FOR
TYPE 'CT' APPROACH GUTTERS
(BRIDGES WITH CURB)


ROUTE SEC.
ARKANSAS STATE HIGHWAY COMMISSION
LITTLE ROCK, ARK.

DRAWN BY: TMG DATE: 11/7/2019 FILENAME: b55039.dgn
CHECKED BY: CRE DATE: 11/7/2019 SCALE: AS NOTED
DESIGNED BY: STD. DATE: -


DRAWING NO. 55039

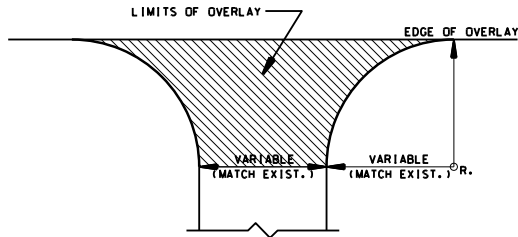

DETAIL FOR STATE HIGHWAY TURNOUTS
(PAVEMENT PRESERVATION)

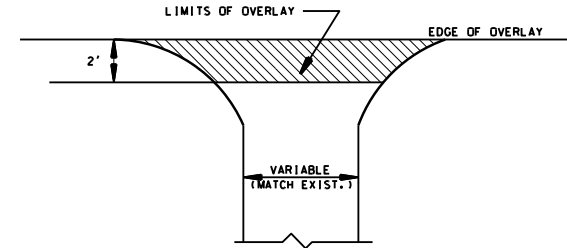

DETAIL FOR DRIVEWAY TURNOUTS
(PAVEMENT PRESERVATION)

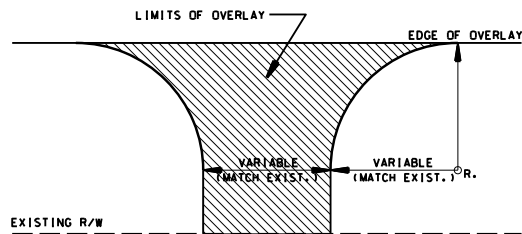


DETAIL FOR CITY STREET
AND COUNTY ROAD TURNOUTS
(PAVEMENT PRESERVATION)

NOTES:

1. TURNOUTS AND PRIVATE DRIVES SHALL BE MODIFIED WHERE NECESSARY TO MEET LOCAL CONDITIONS AS DIRECTED BY THE ENGINEER.
2. NORMAL ACHM SURFACE COURSE (1 1/2") (220 LBS PER SQ. YD.) SHALL BE USED ON DRIVEWAYS AND TURNOUTS UNLESS SHOWN OTHERWISE IN THE PLANS.
3. STATE HIGHWAY TURNOUTS SHALL BE PAVED TO THE BACK OF THE RADIUS.
4. CITY STREET AND COUNTY ROAD TURNOUTS SHALL BE PAVED TO THE RIGHT-OF-WAY LIMITS.


4-13-23		REVISED PAVING AT TURNOUTS	
5-19-22		ISSUED	
DATE REV	DATE FILMED	ISSUED	DESCRIPTION

ARKANSAS STATE HIGHWAY COMMISSION
DETAILS OF DRIVEWAYS & STREET
TURNOUTS (PAVEMENT PRESERVATION)
STANDARD DRAWING DR-3




WASHER PLATE


Note: Bolts, nuts, washers and plates shall be galvanized in accordance with Section 807 of the Standard Specifications.



BASE PLATE




FOR DESIGN SPEEDS OF 50 MPH OR LESS
ALIGN FACE OF GUARDRAIL WITH FACE OF CURB.




FOR DESIGN SPEEDS OF 55 MPH OR MORE
PLACE GUARDRAIL POSTS AGAINST BACK OF CURB.

DETAIL OF GUARDRAIL PLACEMENT BEHIND CURB (W-BEAM)


FOR DESIGN SPEEDS OF 50 MPH OR LESS ALL CURB FACES, AS SHOWN ON STD. DRWG. CG-1, MAY BE USED. FOR DESIGN SPEEDS OF 55 MPH OR MORE TYPE "E" CURB FACE SHALL BE USED.

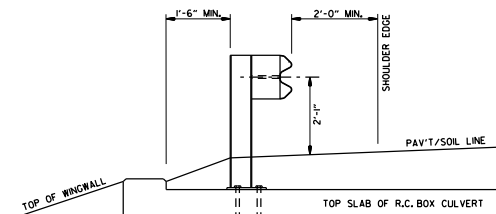

SECTION A-A




DETAIL OF CONNECTION




Plan View Steel Posts

Either hole configuration acceptable



Plan View Wood Posts


Either hole configuration acceptable



Notes: For overlying soil depths (A) ranging from 0 to 18", the depth of required drilling (B) is equal to 24".

Zone A:
Backfill according to Section 617.03(a).


Zone B:
Backfill hole in 6" lifts with material meeting the requirements of Section 802.02(c) - Alternate gradation, Compact to 95% maximum dry density per ASTM D-698.



Notes: For overlying soil depths (A) ranging from 18" to 44", the depth of required drilling (B) is equal to either 12" or 44" minus the depth of soil whichever is less.

Zone A & B:
Backfill according to Section 617.03(a).

DETAIL OF POST PLACEMENT IN SOLID ROCK (W-BEAM)

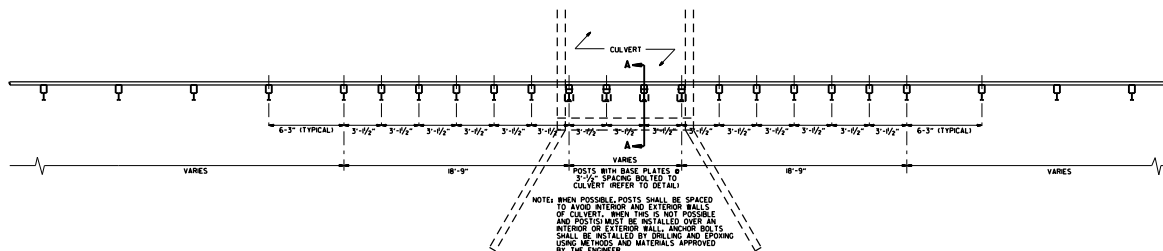


PLAN LAYOUT OF TYPE A GUARDRAIL AT LOW-FILL CULVERTS


NOTE: THIS DETAIL IS TO BE USED ONLY WHEN THE COVER OVER THE CULVERT DOES NOT PERMIT FULL EMBEDMENT OF GUARDRAIL POSTS AS SHOWN ON STD. DRWG. GR-1.

DATE	REVISION	FILED
11-07-19	RENUMBERED, RENAMED, REVISED REFERENCE	
11-16-17	REVISED GUARDRAIL HEIGHT	
07-14-10	RAISED HEIGHT OF GUARDRAIL 1"	
04-12-07	REVISED DETAIL OF GUARDRAIL PLACEMENT BEHIND CURB	
11-10-05	ADDED GUARDRAIL PLACEMENT BEHIND CURB; REVISED DETAIL OF CONNECTION	
11-18-04	REVISED POST PLACEMENT IN ROCK & CULVERT CONNECTION DETAILS. ADDED DETAIL FOR GUARDRAIL PLACEMENT AT LOW-FILL CULVERTS	
03-30-00	REMOVED CONCRETE INSERT ANCHOR CHANGED STEEL SPACER BLOCK TO WOOD BLOCKOUT; ADDED DET. OF GUARDRAIL CONNECTION TO R.C. BOX CULV'T.; DELETED DET. OF STEEL LINE POST CONN. & ADDED DET. OF GUARDRAIL PLACEMENT BEHIND CURB & DET. OF POST PLACEMENT IN SOLID ROCK	
04-03-96	PLACED ARROWS AT CUT-STEEL WASHERS	4-3-96
0-18-96	REV. ASTM REF. TO AASHTO	
8-22-95	ADDED OPTIONAL HOLES	
08-02-94	REVISED ALTERNATE POST SIZE	
08-05-93	REVISED STEEL POST SIZE	
10-01-92	REDRAWN & REVISED	10-1-92
08-02-90	DEL. WASHER ON ANCHOR ASSEMBLY	8-2-90
07-15-88	CONFORMED TO 1988 SPECS	
03-04-88	REVISED ANCHOR NOTE	
10-30-87	REVISED ANCHOR ASSEMBLY	712-10-30-87
10-30-87	REVISED PLACEMENT BEHIND CURB	547-10-30-87
10-09-87	REDRAWN & REVISED	803-10-9-87


ARKANSAS STATE HIGHWAY COMMISSION
GUARDRAIL DETAILS
STANDARD DRAWING GR-7

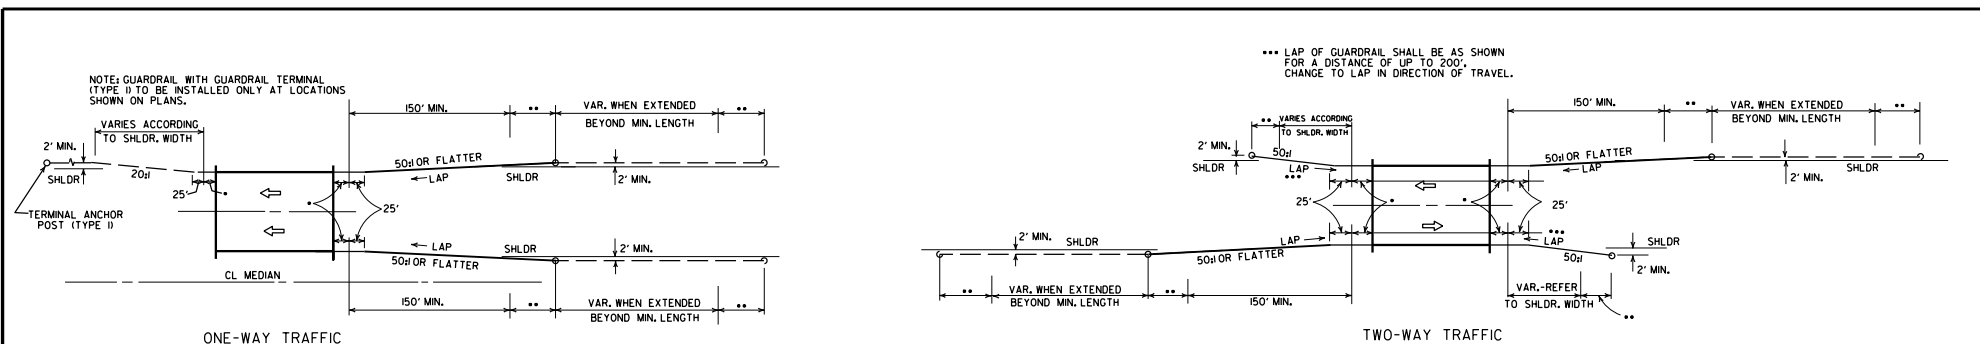

METHODS OF INSTALLATION OF GUARDRAIL AT LESS THAN FULL SHOULDER WIDTH BRIDGES USING GUARDRAIL TERMINAL (TYPE 2)

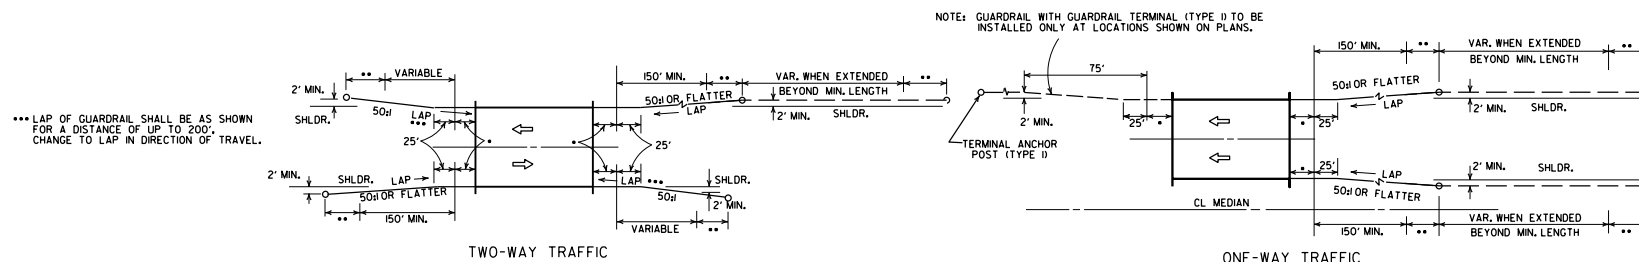


METHOD OF INSTALLATION OF GUARDRAIL AT FULL SHOULDER WIDTH BRIDGES USING GUARDRAIL TERMINAL (TYPE 2)

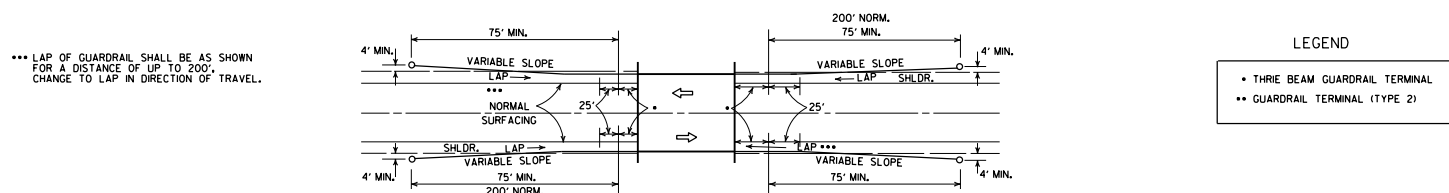


METHOD OF INSTALLATION OF GUARDRAIL USING GUARDRAIL TERMINAL (TYPE 1) (FULL SHOULDER WIDTH OR LESS BRIDGES)


ARKANSAS STATE HIGHWAY COMMISSION		
GUARDRAIL DETAILS		
STANDARD DRAWING GR-8		
11-07-19	RENUMBERED AND RENAMED	
11-17-08	REVISED LAYOUTS	
11-10-05	REMOVED GUARDRAIL NOTES AND DETAILS	
11-16-01	DELETED NOTE-METHOD OF INSTALLATION OF GUARDRAIL USING GUARDRAIL TERM. (TY. 1)	
1-12-00	ADDED CONSTRUCTION NOTE	1-12-00
6-26-91	REVISED LAYOUT	
10-1-92	REDRAWN & REVISED	10-1-92
10-9-87	ADDED NOTE	
DATE	REVISION	DATE FILED

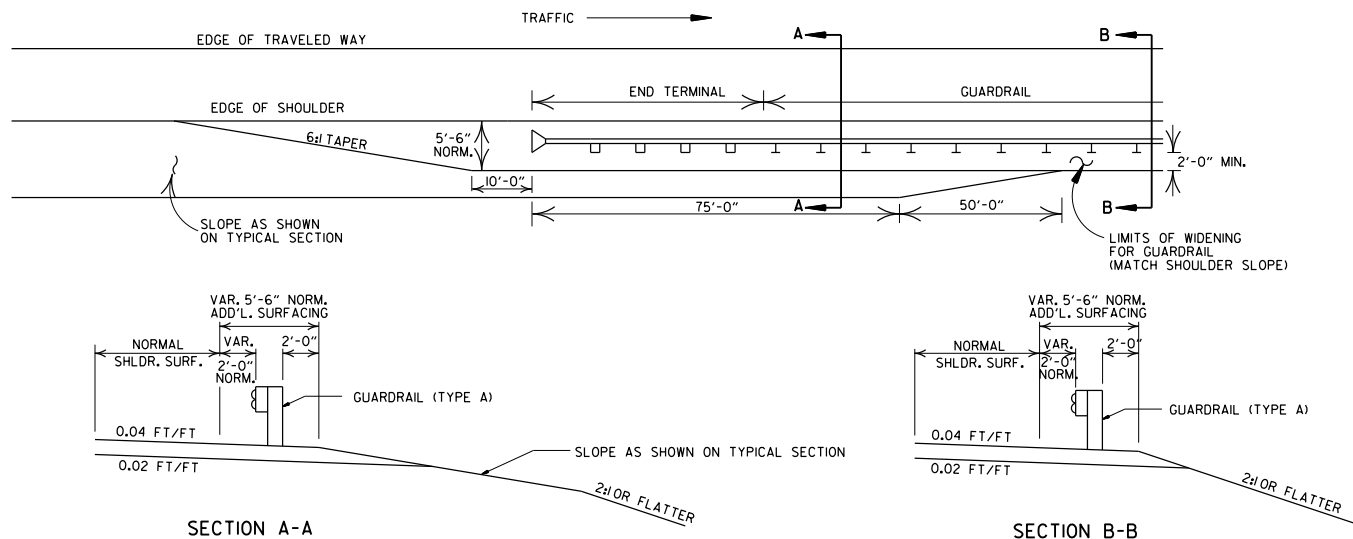

DETAILS OF WIDENING FOR GUARDRAIL

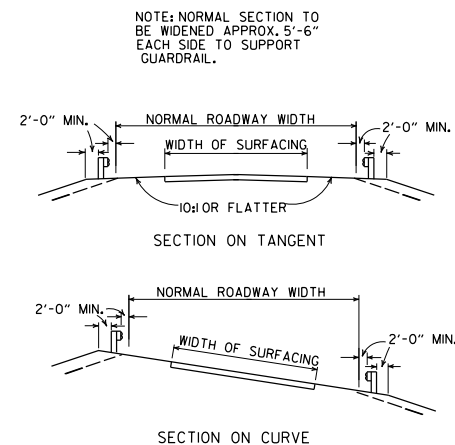


DETAILS SHOWING POSITION OF GUARDRAIL ON HIGHWAY

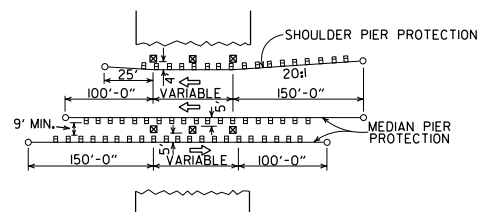

METHOD OF INSTALLATION OF GUARDRAIL AT FIXED OBSTACLE

ARKANSAS STATE HIGHWAY COMMISSION		
GUARDRAIL DETAILS		
STANDARD DRAWING GR-9		
11-07-19	RENUMBERED AND RENAMED	
4-17-08	MINOR REVISION	
11-10-05	DRAWN	
DATE	REVISION	DATE FILM



GENERAL NOTES:

THE THREE BEAM RAIL, SPECIAL END SHOE, AND THE TRANSITION SECTION SHALL BE MADE OF STEEL AND SHALL BE 12 GAGE. ZINC COATING SHALL BE TYPE I.

RAIL POSTS SHALL BE SET PERPENDICULAR TO THE ROADWAY PROFILE GRADE AND VERTICALLY IN CROSS SECTION.

ALL BOLTS SHALL BE SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND NO MORE THAN 3/4" BEYOND IT.

ALL LAP SPLICES, INCLUDING SPECIAL END SHOES, SHALL BE MADE IN THE DIRECTION SHOWN ON STANDARD DRAWINGS GR-8 & GR-13.


REFER TO STD. DRWG. GR-II FOR POST DETAILS.

USE THREE BEAM GUARDRAIL COMPONENTS OF SAME MATERIAL FOR ENTIRE JOB.


THREE BEAM POSTS SHALL BE SAME MATERIAL AS W-BEAM POSTS FOR ENTIRE JOB.

WOOD POSTS & WOOD BLOCKS SHALL BE EITHER DENSE NO. 1 STRUCTURAL OR BETTER 9.7f (1400 f) OR NO. 1 1350 f SOUTHERN PINE.


II-07-19	RENAMED AND REVISED REFERENCES	
II-06-17	REVISED TRANSITION SECTION, GUARD RAIL HEIGHT, AND GENERAL NOTES; MOVED THREE BEAM GUARD RAIL CONNECTIONS AT BRIDGES ENDS TO STD. DRWG. GR-12	
07-14-10	RAISED HEIGHT OF W-BEAM I"	
07-29-07	ADDED PLASTIC BLOCKOUTS	
II-00-05	ADDED NOTE FOR ATTACHING STEEL BLOCKOUT	ARKANSAS STATE HIGHWAY COMMISSION
II-08-04	REVISED GENERAL NOTES	
II-09-03	REVISED GENERAL NOTES	
04-10-03	REVISED GENERAL NOTES	GUARDRAIL DETAILS
08-22-02	REVISED NOTE (2)	
06-29-00	MOVED DIMENSION LINES	
05-18-00	ADDED & ISSUED	
03-30-00	DRAIN NOTE	
DATE	REVISION	FILMED
		STANDARD DRAWING GR-10




THRIE BEAM RAIL WITH STEEL TUBING BLOCKOUT
AND STEEL POST
POSTS 1-7




W-BEAM TO THRIE BEAM TRANSITION RAIL
WITH WOOD OR PLASTIC BLOCKOUT AND STEEL POST
POST 8



THRIE BEAM RAIL
WITH WOOD OR PLASTIC
BLOCKOUTS & WOOD POSTS
POSTS 1-6




THRIE BEAM RAIL
WITH WOOD OR PLASTIC
BLOCKOUT & WOOD POST
POST 7



W-BEAM TO THRIE BEAM
TRANSITION RAIL WITH WOOD OR
PLASTIC BLOCKOUT & WOOD POST
POST 8

GENERAL NOTES:
RAIL POSTS SHALL BE SET PERPENDICULAR TO THE ROADWAY PROFILE GRADE AND
VERTICALLY IN CROSS SECTION.
WOOD POSTS & WOOD BLOCKS SHALL BE EITHER DENSE NO. 1 STRUCTURAL OR
BETTER 3,74 (400 #) OR NO. 1 1350 # SOUTHERN PINE.

			ARKANSAS STATE HIGHWAY COMMISSION
11-07-19	RENAMED		GUARDRAIL DETAILS
11-16-17	REVISED GUARDRAIL HEIGHT, CHANGED STD. DWG. NUMBER FROM GR-10A TO GR-II		
07-14-10	REVISED POST 8 DIMENSIONS		
1-29-07	ADDED PLASTIC BLOCKOUTS		
08-22-02	REVISED LIP CURB NOTE		STANDARD DRAWING GR-II
03-30-00	DRAWN & ISSUED		
DATE	REVISION	FILMED	

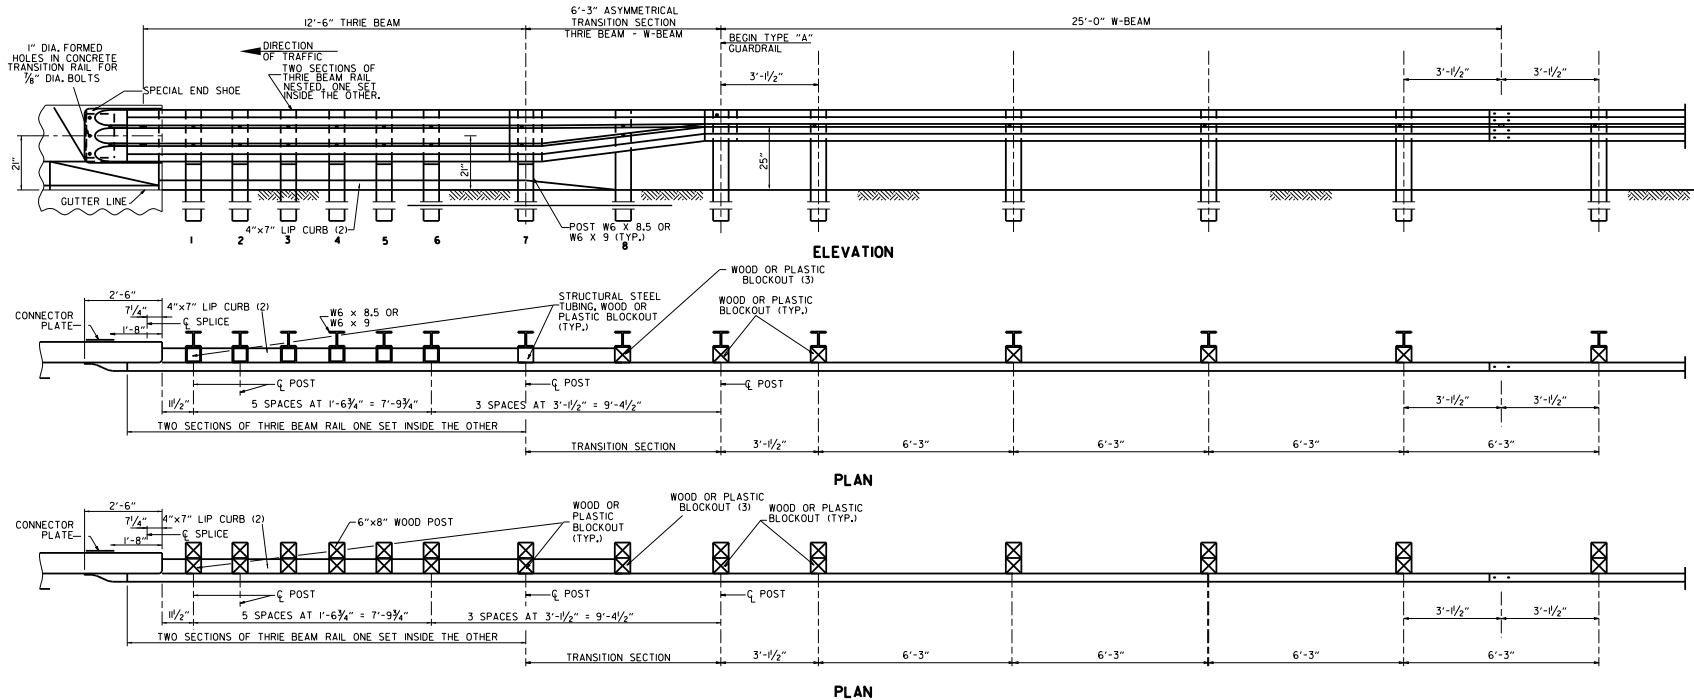

- (1) VERIFY BOLT SPACING FROM RAIL TRANSITION PRODUCER.
- (2) REFER TO APPROACH GUTTER DETAILS.
- (3) LENGTH OF BLOCKOUT ON POST 8 TO BE MODIFIED TO FIT RAIL WIDTH.

THRIE BEAM GUARDRAIL CONNECTION AT BRIDGE ENDS

GENERAL NOTES:

THE THRIE BEAM RAIL, SPECIAL END SHOE, AND THE TRANSITION SECTION SHALL BE MADE OF STEEL AND SHALL BE 12 GAGE. ZINC COATING SHALL BE TYPE I.

RAIL POSTS SHALL BE SET PERPENDICULAR TO THE ROADWAY PROFILE GRADE AND VERTICALLY IN CROSS SECTION.

ALL BOLTS SHALL BE SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND NO MORE THAN 3/4" BEYOND IT.

ALL LAP SPLICES, INCLUDING SPECIAL END SHOES, SHALL BE MADE IN THE DIRECTION SHOWN ON STANDARD DRAWINGS GR-8 & GR-13.

REFER TO STD. DRWG. GR-8 FOR POST DETAILS.


USE THRIE BEAM GUARDRAIL COMPONENTS OF SAME MATERIAL FOR ENTIRE JOB.

THRIE BEAM POSTS SHALL BE SAME MATERIAL AS W-BEAM POSTS FOR ENTIRE JOB.


POSTS SHALL NOT BE PLACED AT SPLICE LOCATIONS ALONG W-BEAM RAILS.

WOOD POSTS & WOOD BLOCKS SHALL BE EITHER DENSE NO. 1 STRUCTURAL OR BETTER 9.1F (4000 F) OR NO. 1350 F SOUTHERN PINE.

			ARKANSAS STATE HIGHWAY COMMISSION
			GUARDRAIL DETAILS
05-14-20	REVISED NOTES		STANDARD DRAWING GR-12
11-07-19	RE-NAMED & REVISED REFERENCES		
11-16-17	RE-DRAWN FROM STD. DRWG. GR-10 & ISSUED		
DATE	REVISION	FILMED	




CONCRETE PAVEMENT




ASPHALT PAVEMENT


BROKEN LINE STRIPING




SOLID LINE STRIPING ON CONCRETE PAVEMENT



SOLID LINE STRIPING ON ASPHALT PAVEMENT




ASPHALT PAVEMENT




CONCRETE PAVEMENT

STRIPING AT ADJACENT NO PASSING LANES




YIELD LINE DETAIL

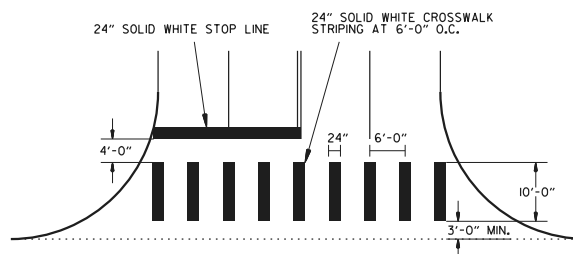


CROSSWALK AND STOP LINE DETAILS

- NOTES:
1. REFER TO THE STRIPING DETAILS FOR PAVEMENT MARKING LINE WIDTHS.
 2. THIS DRAWING SHALL BE USED IN CONJUNCTION WITH THE LATEST REVISED ADDITION OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES."
 3. RAISED PAVEMENT MARKERS SHALL BE PLACED ON AN 80 FEET SPACING UNLESS OTHERWISE SHOWN IN THE PLANS.




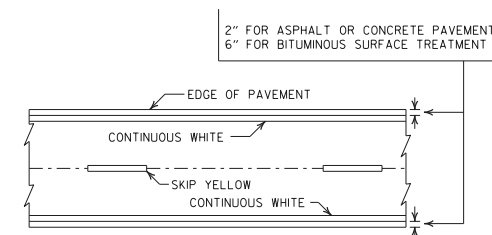


PAVEMENT EDGE LINE MARKING




DETAIL OF STANDARD RAISED PAVEMENT MARKERS


04-09-26	REV. CROSSWALK & STOP LINE DETAILS	 ARKANSAS STATE HIGHWAY COMMISSION		
02-27-20	REV. STOP LINE DETAILS			
06-01-17	REVISED YELLOW LINE DETAIL			
05-12-16	REVISED LINE WIDTHS, SPACING, & NOTES			
09-12-13	REVISED DETAIL OF PAVEMENT MARKERS			
DATE	REV	DESCRIPTION	PAVEMENT MARKING DETAILS	
DATE EFFECTIVE		STANDARD DRAWING		PM-1
04-09-2026				

RI-1  STANDARD 30"x30" EXPRESSWAY 36"x36" SPECIAL 48"x48"	RI-2  STD. 36"x36"x36" EXPWY. 48"x48"x48" FWY. 60"x60"x60"	R2-1  STD. 24"x30" EXPWY. 36"x48" FWY. 48"x60"	W3-5  STD. 36"x36" EXPWY. 48"x48" FWY. 48"x48"	W3-5a  STD. 36"x36" EXPWY. 48"x48" FWY. 48"x48"	R4-1  STD. 24"x30" EXPWY. 36"x48" FWY. 48"x60"	R4-2  STD. 24"x30" EXPWY. 36"x48" FWY. 48"x60"	R2-6oP  48"x36" * USE 6" C LETTERS ** USE 4" D LETTERS	GENERAL NOTES: 1. ALL TRAFFIC CONTROL DEVICES USED ON ROAD CONSTRUCTION SHALL CONFORM TO THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, LATEST EDITION, AND TO THE STANDARD HIGHWAY SIGNS, LATEST EDITION, OR AS APPROVED BY THE FEDERAL HIGHWAY ADMINISTRATION. 2. TRAFFIC CONTROL DEVICES SHALL BE SET UP JUST BEFORE THE START OF CONSTRUCTION OPERATIONS AND SHALL BE PROPERLY MAINTAINED DURING THE TIME SUCH CONDITIONS EXIST. THEY SHALL REMAIN IN PLACE ONLY AS LONG AS NEEDED AND REMOVED THEREAFTER. 3. EXISTING SIGNS AND CONSTRUCTION SIGNS SHALL BE KEPT IN PROPER POSITION, AND BE CLEAN AND LEGIBLE AT ALL TIMES. SIGNS THAT DO NOT APPLY TO EXISTING CONDITIONS SHALL BE REMOVED. SIGNS THAT ARE DAMAGED, DEFACED, OR THAT ACCUMULATE DIRT DURING CONSTRUCTION SHALL BE CLEANED, REPAIRED, OR REPLACED. 4. SIGNS ARE USUALLY MOUNTED ON A SINGLE POST, ALTHOUGH THOSE WIDER THAN 36" OR LARGER THAN 10 SQ.FT. SHALL BE MOUNTED ON TWO POSTS OR ABOVE A TYPE III BARRICADE. 5. SIGN POSTS DIRECT BURIED IN SOIL SHALL BE 2 LB. MINIMUM CHANNEL POST OR 4"x4" WOOD POSTS. CHANNEL POSTS SHALL BE PAINTED GREEN. WOOD POSTS SHALL BE PAINTED WHITE. ALL POSTS SHALL BE NEATLY CONSTRUCTED, AND SHALL BE REPLUMBED, CLEANED, OR REPAIRED AS NEEDED FOR THE DURATION OF THE JOB. THERE SHALL NOT BE MORE THAN 2 POSTS IN A 7' PATH FOR WOOD OR CHANNEL POSTS. ANY CHANNEL POST SPLICE SHALL BE IN ACCORDANCE WITH STANDARD DRAWING TC-3. 6. POST MOUNTED SIGNS IN RURAL AREAS SHALL BE CONSTRUCTED WITH THE NEAR EDGE OF THE SIGN FROM 6 TO 12 FEET FROM THE PAVEMENT EDGE. SIGNS IN URBAN AREAS AND BARRICADE MOUNTED SIGNS SHALL BE MOUNTED A MINIMUM OF 2 FEET FROM THE PAVEMENT EDGE. 7. ALL POST AND BARRICADE MOUNTED SIGNS MOUNTED IN URBAN AREAS SHALL BE MOUNTED A MINIMUM DISTANCE OF 7' FROM THE BOTTOM OF THE SIGN TO THE ROADWAY SURFACE. ALL POST AND BARRICADE MOUNTED SIGNS MOUNTED IN RURAL AREAS SHALL BE MOUNTED A MINIMUM DISTANCE OF 7' FROM THE BOTTOM OF THE SIGN TO THE ROADWAY SURFACE, EXCEPT A MINIMUM OF 6' SHALL BE USED WHEN MOUNTING AN ADVISORY SIGN BELOW A WARNING SIGN. TEMPORARY SIGNS MAY BE MOUNTED ON PORTABLE SUPPORTS FOR INTERMEDIATE TERM STATIONARY WORK CONDITIONS. THE SIGNS MINIMUM MOUNTING HEIGHT SHALL BE 5'. RETROREFLECTIVE DEVICES SHALL BE USED. TEMPORARY SIGNS MAY BE MOUNTED ON PORTABLE SUPPORTS FOR SHORT-TERM, SHORT DURATION, AND MOBILE CONDITIONS. THEY SHALL BE NO LESS THAN ONE (1) FOOT ABOVE THE TRAVELED WAY. LONG-TERM STATIONARY SIGNS SHALL BE DIRECT BURIED IN SOIL, UNLESS CONDITIONS NECESSITATE THE USE OF PORTABLE SIGNS, OR AS APPROVED BY THE ENGINEER. CONCRETE PADS, CONCRETE OR ROCK BALLAST, OR OTHER SOLID MATERIALS SHALL NOT BE UTILIZED WITH PORTABLE SIGN SUPPORTS. 8. FLAGGERS SHALL USE REFLECTORIZED STOP-SLOW PADDLES. FLAGS MAY BE USED ONLY FOR EMERGENCY SITUATIONS. 9. MOST OF THE SIGNS SHOWN ARE ORIENTED TO THE RIGHT. HOWEVER, THIS DOES NOT PRECLUDE THE USE OF MIRROR IMAGES OF THESE SIGNS WHERE THE REVERSE ORIENTATION MIGHT BETTER CONVEY TO MOTORISTS THE PROPER DIRECTION OF MOVEMENT. 10. R2-6oP PLAQUES SHALL BE MOUNTED BELOW AN APPLICABLE ADVANCE WARNING SIGN THAT IS LOCATED AT LEAST 1500' BUT NOT MORE THAN 1 MILE IN ADVANCE OF THE WORK ZONE. IF A SPEED LIMIT REDUCTION IS IN EFFECT, THE PLAQUE SHALL BE PLACED A MINIMUM OF 500' IN ADVANCE OF THE W3-5 "REDUCED SPEED AHEAD" SIGN. R2-II SIGNS SHALL BE INSTALLED AT OR NEAR THE DOWNSTREAM END OF THE WORK ZONE. SEE STANDARD DRAWINGS TC-2, TC-3, AND TC-6 FOR TYPICAL PLACEMENT LOCATIONS. * NOTE: SUPPORTS FOR SIGNS, BARRICADES, AND VERTICAL PANELS THAT ARE DIFFERENT FROM THE REQUIREMENTS SHOWN IN NOTES 4 & 5, BUT MEET THE REQUIREMENTS OF MANUAL FOR ASSESSING SAFETY HARDWARE (MASH), WILL BE ACCEPTED. COMPLIANCE WITH THE REQUIREMENTS OF MANUAL FOR ASSESSING SAFETY HARDWARE (MASH) IS REQUIRED FOR ALL PROJECTS.
R5-1  STD. 30"x30" EXPWY. 36"x36" SPECIAL 48"x48"	R11-2  48"x30"	R11-3A  60"x30"	R11-4  60"x30"	W21-5a  STD. 36"x36" FWY. 48"x48"	W1-1  STD. 36"x36" FWY. 48"x48"	W1-2  STD. 36"x36" FWY. 48"x48"	R2-II  36"x48"	
W1-3  STD. 48"x48"	W1-4  STD. 48"x48"	W1-6  STD. 48"x24" SPECIAL 60"x30"	W1-8  STD. 18"x24" SPECIAL 24"x30" EXPWY. 30"x36" FWY. 36"x48"	W3-1  STD. 36"x36" SPECIAL 48"x48"	W3-2  STD. 36"x36" SPECIAL 48"x48"	W4-2  STD. 36"x36" FWY. 48"x48"	R56-1  STD. 18"x18"	
W5-1  STD. 36"x36" SPECIAL 48"x48"	W6-3  EXPWY. 36"x36" SPECIAL 48"x48"	W8-7  EXPWY. 36"x36" FWY. 48"x48"	W9-2  STD. 36"x36" FWY. 48"x48"	W13-1  STD. 24"x24"	W20-1  STD. 48"x48"	W20-2  STD. 48"x48"	W20-3  STD. 48"x48"	
W20-4  STD. 48"x48"	W20-5  STD. 48"x48"	W20-7a  STD. 36"x36" FWY. 48"x48"	W21-2  STD. 30"x30" SPECIAL 36"x36"	W21-5  STD. 30"x30" SPECIAL 36"x36"	W24-1  STD. 36"x36"	W1-4b  STD. 48"x48"		
W8-II  STD. 36"x36" FWY. 48"x48"	W8-9  STD. 36"x36" FWY. 48"x48"	G20-1  60"x24"	G20-2  48"x24"	OM-3L OM-3R  12"x36"	M4-9  STD. 30"x24" SPECIAL 48"x36" SPECIAL 60"x48"	M4-10  48"x18"		

REVISED WITH 08-14-25 REPLACED WITH 11-07-19 REVISED FOR MASH 11-07-19 REVISED FOR 04-13-17 REVISED FOR 09-02-15 REVISED FOR 12-13-11 REVISED FOR	 ARKANSAS STATE HIGHWAY COMMISSION	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	
		DATE EFFECTIVE	STANDARD DRAWING
		08-14-2025	TC-1

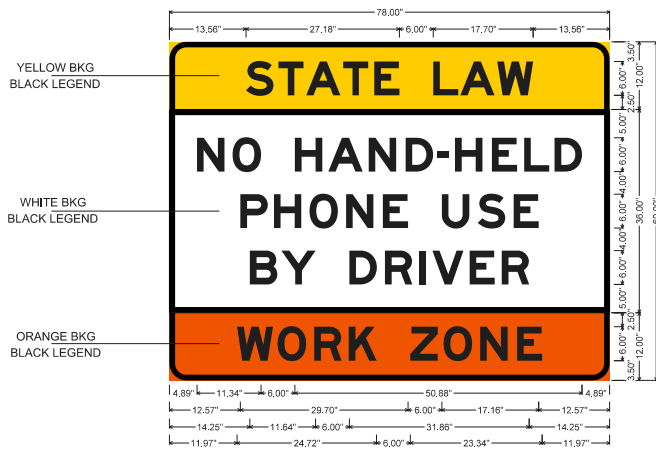


WZ-4 (INTERSTATE) SIGN

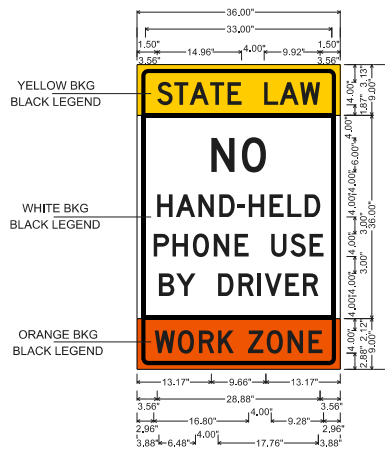

WZ-4 (NON-INTERSTATE) SIGN


NOTE: REFER TO STANDARD DRAWING TC-1 FOR GENERAL NOTES.

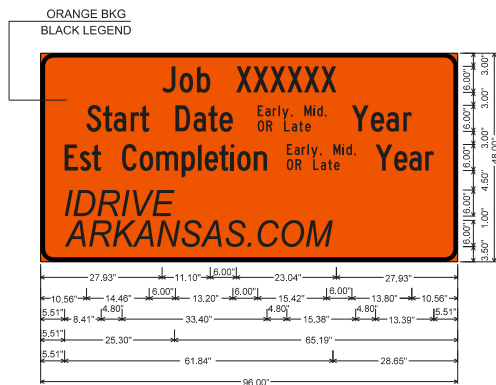


CONSTRUCTION PROJECT INFORMATION SIGN



WZ-1 (INTERSTATE) SIGN



WZ-2 SIGN




WZ-3 SIGN



WZ-W20-5L SIGN




WZ-W20-5R SIGN




WZ-W20-5C SIGN

MOBILE WORK ZONE SIGNS


AR DOT		ARKANSAS STATE HIGHWAY COMMISSION	
STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION			
DATE	REV	DATE EFFECTIVE	STANDARD DRAWING
04-09-2026			TC-1A

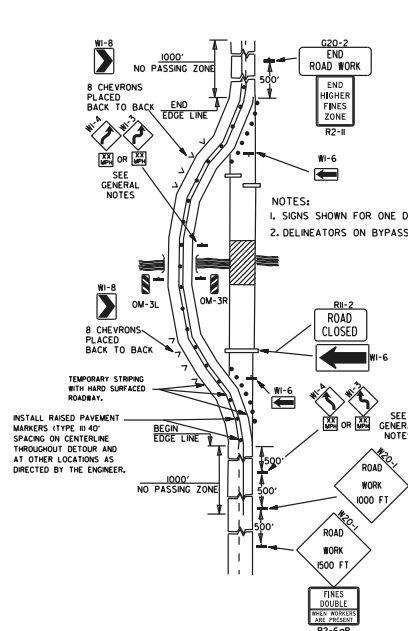


(A) TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES ON A 2-LANE HIGHWAY WHERE THE ENTIRE ROADWAY IS CLOSED AND A BYPASS DETOUR IS PROVIDED.

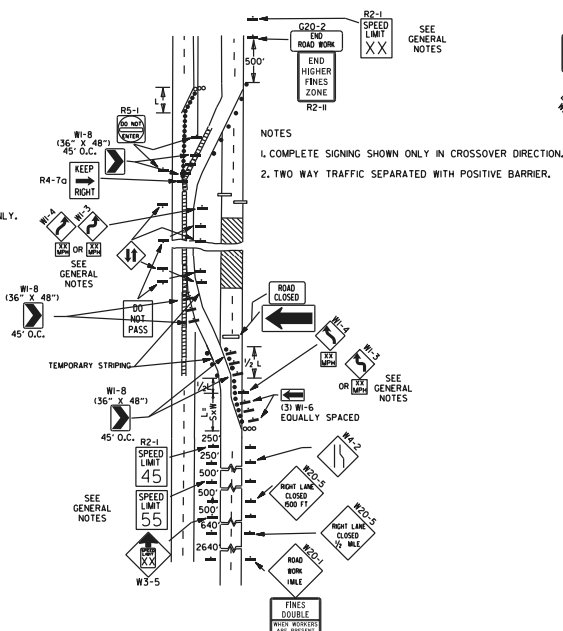


(B) TYPICAL APPLICATION - 4-LANE DIVIDED ROADWAY WHERE ONE ROADWAY IS CLOSED.

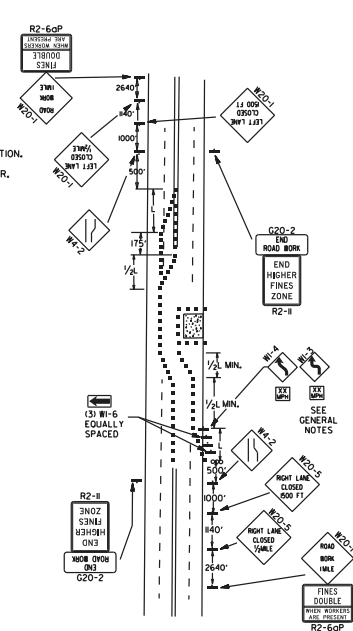


(C) TYPICAL APPLICATION - 4-LANE UNDIVIDED ROADWAY WHERE HALF OF THE ROADWAY IS CLOSED.

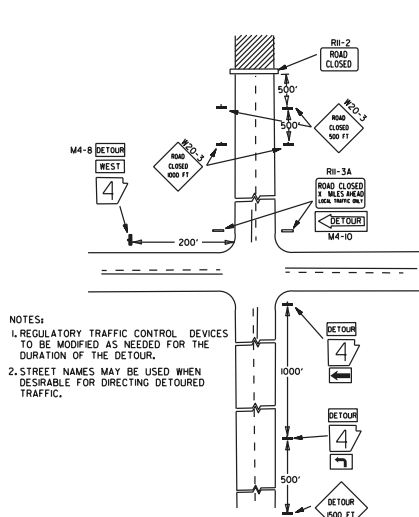


(D) TYPICAL APPLICATION - ROADWAY CLOSED BEYOND DETOUR POINT.

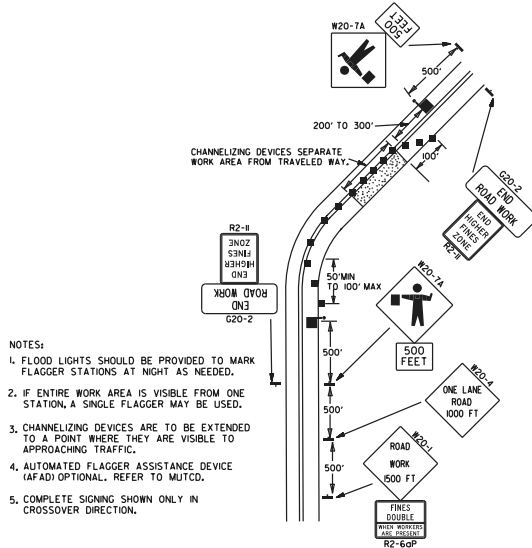

(E) TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES ON 2-LANE HIGHWAY WHERE ONE LANE IS CLOSED AND FLAGGING IS PROVIDED.

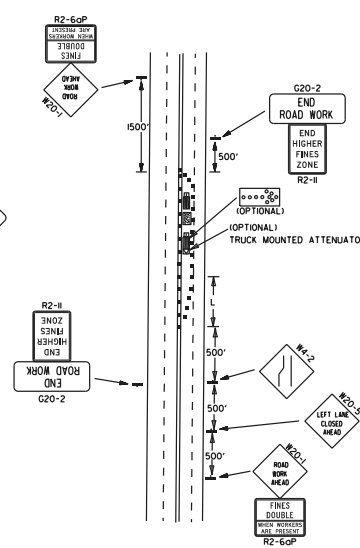

(F) TYPICAL APPLICATION - 4-LANE UNDIVIDED ROADWAY WITH INSIDE LANE CLOSED.

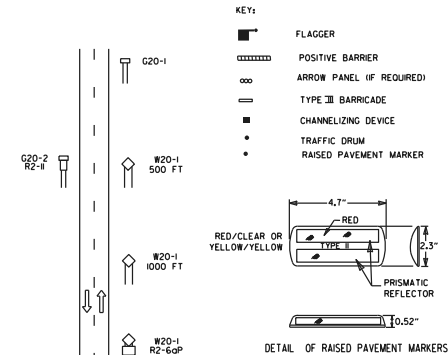

TYPICAL ADVANCE WARNING SIGN PLACEMENT

TAPER FORMULAE:

L=5XW FOR SPEEDS OF 45MPH OR MORE.

L= $\frac{WS}{60}$ FOR SPEEDS OF 40MPH OR LESS.

WHERE:

L= MINIMUM LENGTH OF TAPER.

S= NUMERICAL VALUE OF POSTED SPEED LIMIT PRIOR TO WORK OR 85TH PERCENTILE SPEED.

W= WIDTH OF OFFSET.

GENERAL NOTES:

1. THE MAINTENANCE DIVISION SHALL CONDUCT A BALL BANK STUDY TO DETERMINE THE ADVISORY SPEED LIMIT PRIOR TO OPENING TO TRAFFIC. THE ADVISORY SPEED WILL BE POSTED ON W-3 OR W-4 CURVE WARNING SIGNS. USE W-4 WHEN SPEED IS GREATER THAN 30MPH AND W-3 WHEN 30MPH OR LESS.

2. WHEN THE EXISTING SPEED LIMIT IS 55MPH AND THE PLANS REQUIRE A SPEED LIMIT OF 45MPH, THE R2-155 SHALL BE OMITTED AND THE W-3-5 SHALL BE INSTALLED AT THAT LOCATION. ADDITIONAL R2-155MPH SPEED LIMIT SIGNS SHALL BE INSTALLED AT A MAXIMUM OF 1/4 MILE INTERVALS.

3. WHEN THE EXISTING SPEED LIMIT IS 65MPH AND THE PLANS REQUIRE A SPEED LIMIT OF 55MPH, THE R2-145 SHALL BE OMITTED. ADDITIONAL R2-155MPH SPEED LIMIT SIGNS SHALL BE INSTALLED AT A MAXIMUM OF 1/4 MILE INTERVALS. AT THE END OF THE WORK AREA A R2-155 SHALL BE INSTALLED TO MATCH ORIGINAL SPEED LIMIT.

4. THE MAXIMUM SPACING BETWEEN CHANNELIZING DEVICES IN A TAPER SHOULD BE APPROXIMATELY EQUAL IN FEET TO THE SPEED LIMIT. BEYOND THE TAPER, MAXIMUM SPACING SHALL BE TWO TIMES THE SPEED LIMIT, OR AS DIRECTED BY THE ENGINEER.

5. WARNING LIGHTS AND/OR FLAGS MAY BE MOUNTED TO SIGNS OR CHANNELIZING DEVICES AT NIGHT AS NEEDED.



6. PAVEMENT MARKINGS NO LONGER APPLICABLE WHICH MIGHT CREATE CONFUSION IN THE MINDS OF VEHICLE OPERATORS SHALL BE REMOVED OR OBLITERATED AS SOON AS PRACTICABLE.

7. TRAILER MOUNTED DEVICES SUCH AS ARROW PANELS AND PORTABLE CHANGEABLE MESSAGE SIGNS SHALL BE DELINEATED BY AFFIXING CONSPICUOUS MATERIAL IN A CONTINUOUS LINE ON THE FACE OF THE TRAILER. WHEN PLACED ON OR ADJACENT TO THE SHOULDER AND NOT BEHIND A POSITIVE BARRIER, THESE DEVICES SHALL BE DELINEATED BY PLACING FIVE (5) TRAFFIC DRUMS, EQUALLY SPACED ALONG THE TRAFFIC SIDE OF THE DEVICE. PAYMENT FOR TRAFFIC DRUMS SHALL BE CONSIDERED INCLUDED IN THE PRICE BID FOR VARIOUS TRAILER MOUNTED DEVICES.

8. DIMENSIONS SHOWN FOR RAISED PAVEMENT MARKERS ARE TYPICAL. THE CONTRACTOR MAY SUBSTITUTE SIMILAR MARKERS WITH THE APPROVAL OF THE ENGINEER. REQUESTING APPROVAL FOR SIMILAR MARKERS MAY BE MADE BY REFERRING TO THE AASHTO QUALIFIED PRODUCTS LIST.

9. ALL TRAILER MOUNTED DEVICES SUCH AS ARROW PANELS AND PORTABLE CHANGEABLE MESSAGE SIGNS SHALL MEET THE REQUIREMENTS OF THE MANUAL FOR ASSESSING SAFETY HARDWARE (MASH).

AR DOT		ARKANSAS STATE HIGHWAY COMMISSION	
STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION			
DATE	REV	DESCRIPTION	
08-14-2025	ADDED R2-60P AND R2-11		
05-20-21	REVISED NOTE 1		
11-07-19	ADDED NOTE 5		
09-02-15	REVISED NOTE 5, ADDED NOTE 6, REVISED R2-155 (LATE REPAIRED ROADWAY WITH W3-5)		
09-12-13	REVISED DETAIL OF MARKINGS		
DATE EFFECTIVE		STANDARD DRAWING	TC-2
08-14-2025			



- DIRECTLY ADJACENT TO CONSTRUCTION OPERATIONS AND AT EXIT TAPERS.
TUBULAR MARKERS SHALL BE STABILIZED WITH WEIGHTED BASES IN ACCORDANCE
WITH THE M.U.T.C.D.



INTERSTATE			
VERTICAL DIFFERENTIAL	LOCATION	TRAFFIC CONTROL	
≤ 3"	CENTERLINE	WB-17 AND LANE STRIPING	
≤ 3"	EDGE OF TRAVELED LANE OR EDGE OF SHOULDER	WB-9, EDGE LANE STRIPING, AND TRAFFIC DRUMS ¹	
≤ 3"	EDGE OF TRAVELED LANE OR EDGE OF SHOULDER	WB-17 EDGE LANE STRIPING, AND TRAFFIC DRUMS ¹	
≤ 3"	EDGE OF TRAVELED LANE OR EDGE OF SHOULDER	PRECAST CONCRETE BARRIER & EDGE LINES	
> 6"			
INTERSTATE AND NON-INTERSTATE			
FORESLOPE	HEIGHT	TRAFFIC CONTROL	
1:1	> 2 FT	PRECAST CONCRETE BARRIER	
2:1	≤ 5 FT	TRAFFIC DRUMS	
2:1	> 5 FT	PRECAST CONCRETE BARRIER	
Flatter than 2:1	N/A	TRAFFIC DRUMS	

1. WHEN THE SHOULDER AREA IS USED AS PART OF THE TRAVELED LANE AND THERE IS INSUFFICIENT WIDTH TO PLACE TRAFFIC DRUMS ON THE REMAINING SHOULDER WIDTH, THEN VERTICAL PANELS SHALL BE USED.

2. WHEN THERE IS INSUFFICIENT WIDTH TO PLACE TRAFFIC DRUMS ON THE REMAINING SHOULDER WIDTH, A STABILIZED WEDGE SHALL BE USED.





3. PRECAST CONCRETE BARRIER WALL CAN BE USED INSTEAD OF THE TRAFFIC DRUMS IF THE SIGN, EDGE LANE STRIPING, AND TRAFFIC DRUMS ARE USED AND WHERE DIRECTED BY THE ENGINEER.

4. A STABILIZED WEDGE, WB-17 SIGN, EDGE LANE STRIPING, AND TRAFFIC DRUMS CAN BE USED INSTEAD OF PRECAST CONCRETE BARRIER WALL AND WHERE DIRECTED BY THE ENGINEER.

5. W2-5, W2-5A, AND/OR W2-5B SIGNS SHALL BE USED WHERE THE ROADWAY IS UNSTRUCTURED AND WHERE DIRECTED BY THE ENGINEER.


6. TIME LIMITATIONS MUST CONFORM TO SECTION 603 OF THE STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION (CURRENT EDITION).

GENERAL NOTES:




08-14-20	ADDED R2-6&P AND R2-11	 ARKANSAS STATE HIGHWAY COMMISSION	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION		TC-3
05-22-20	REVISED TRAFFIC CONTROL NOTES, ADDED NOTE 1				
09-12-21	REVISED TRAFFIC CONTROL DEVICES AND NOTES				
05-20-21	REVISED NOTE 10				
02-27-20	REVISED DETAILS				
DATE	REV	DESCRIPTION			
DATE EFFECTIVE		STANDARD DRAWING			
08-14-2025		TC-3			

NOTE : W20-1 (VARIOUS DISTANCE) ADVANCE SIGNS
TO BE REPLACED AS NEEDED BY EQUIVALENT W20-5 SIGNS
AS WORKING AREA SHIFTS.

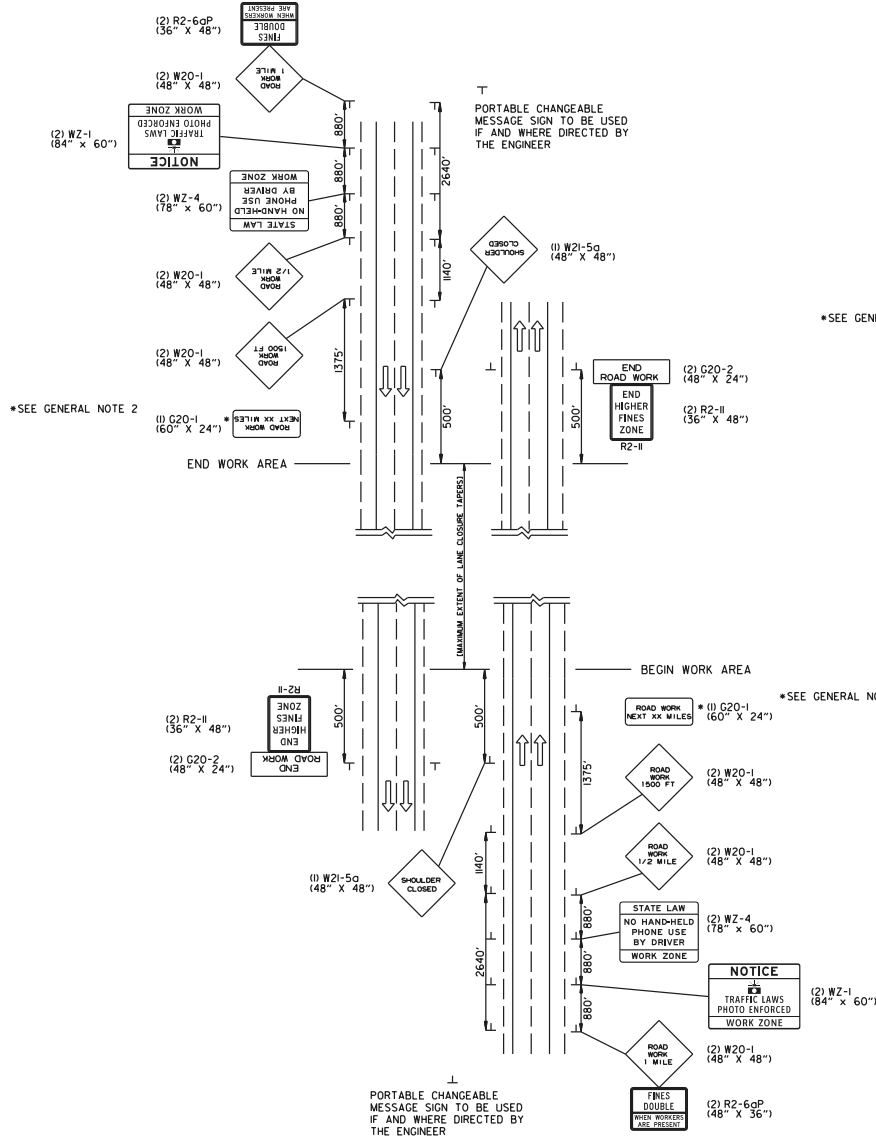

NOTE : W20-1 (VARIOUS DISTANCE) ADVANCE SIGNS
TO BE REPLACED AS NEEDED BY EQUIVALENT W20-5 SIGNS
AS WORKING AREA SHIFTS.

(A) TYPICAL APPLICATION - ADVANCE WARNING SIGNS AT BEGINNING AND
END OF JOB (FULLY CONTROLLED ACCESS FACILITIES) (ALL STAGES)









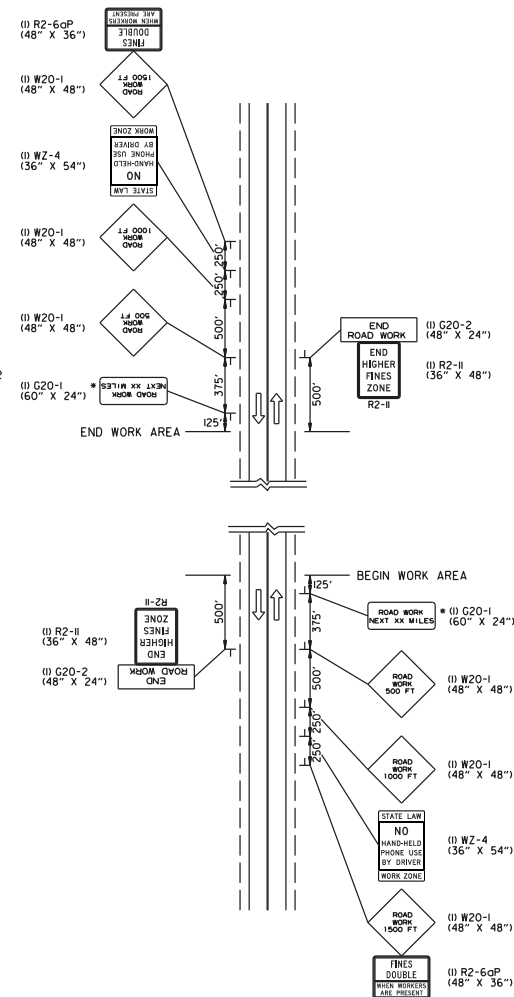


(B) TYPICAL APPLICATION - ADVANCE WARNING SIGNS AT BEGINNING AND
END OF JOB (NON-FULLY CONTROLLED ACCESS FACILITIES) (ALL STAGES)

GENERAL NOTES:

1. FLAGS MAY BE MOUNTED TO SIGNS AT NIGHT AS NEEDED.
2. THE G20-1 SIGN SHOULD BE INSTALLED ON JOBS OF OVER TWO MILES IN LENGTH. WHEN THE LANE CLOSURE IS NOT AT THE BEGINNING OF THE PROJECT, THE G20-1 SIGN SHALL BE ERECTED 125' IN ADVANCE OF THE JOB LIMIT. ADDITIONAL W20-1 (1 MILE OR 1500 FT) SIGNS ARE NOT REQUIRED IN ADVANCE OF LANE CLOSURES THAT BEGIN INSIDE THE PROJECT LIMITS. THE DISTANCE DISPLAYED ON THE G20-1 SIGN SHALL BE STATED TO THE NEAREST WHOLE MILE.
3. PORTABLE CHANGEABLE MESSAGE SIGNS SHALL BE DELINEATED BY AFFIXING CONSPICUITY MATERIAL IN A CONTINUOUS LINE ON THE FACE OF THE TRAILER, WHEN PLACED ON OR ADJACENT TO THE SHOULDER AND NOT BEHIND A POSITIVE BARRIER. THIS DEVICE SHALL BE DELINEATED BY PLACING FIVE (5) TRAFFIC DRUMS, EQUALLY SPACED ALONG THE TRAFFIC SIDE OF THE DEVICE. PAYMENT FOR TRAFFIC DRUMS SHALL BE CONSIDERED INCLUDED IN THE PRICE BID FOR PORTABLE CHANGEABLE MESSAGE SIGNS.
4. PORTABLE CHANGEABLE MESSAGE SIGNS SHALL MEET THE REQUIREMENTS OF THE MANUAL FOR ASSESSING SAFETY HARDWARE (MASH).

CORRECTED W2-4 SIGN DIMENSIONS		AR DOT		ARKANSAS STATE HIGHWAY COMMISSION	
04-09-26	ADDED W2-4 AND REVISED GENERAL NOTE 1	01-22-26	REPLACED "SPEED" WITH "LIMIT" IN W2-1	11-06-25	REPLACED "SPEED" WITH "LIMIT" IN W2-1
08-14-25	ISSUED	DATE	REV	DATE	REV
STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION			TC-6		
DATE EFFECTIVE			STANDARD DRAWING		
04-09-2026					

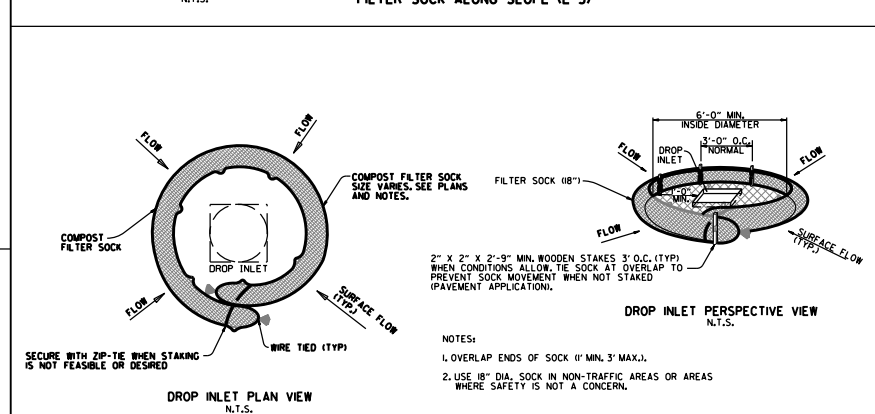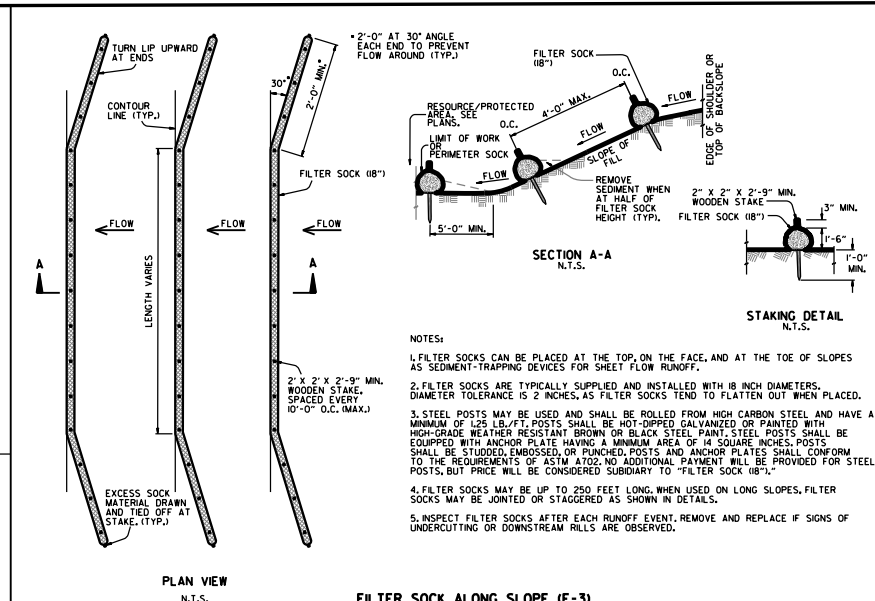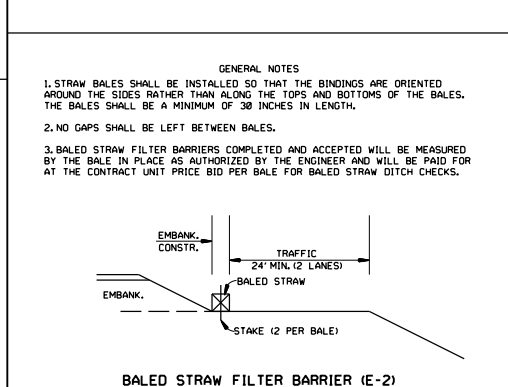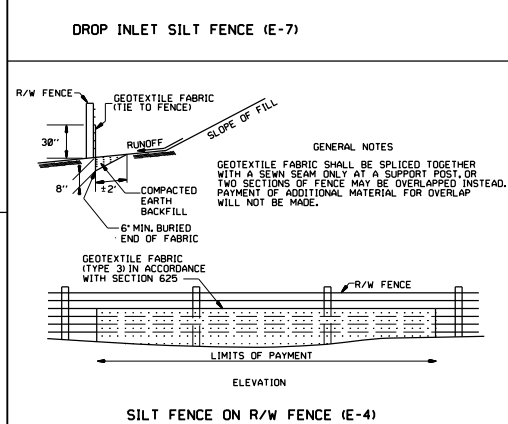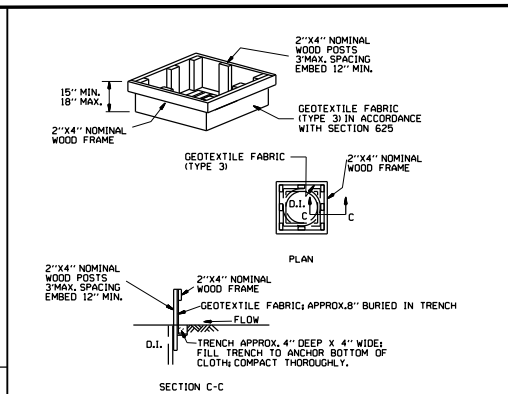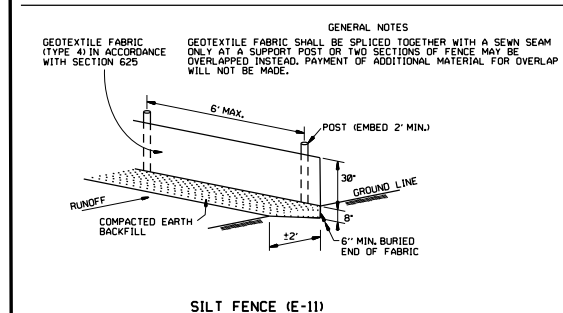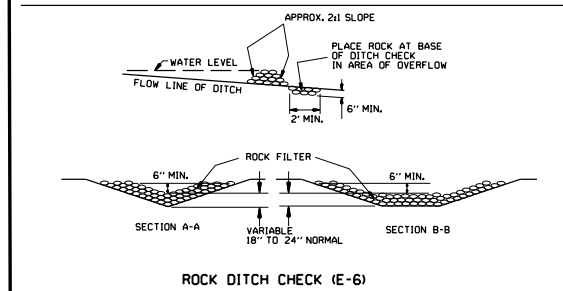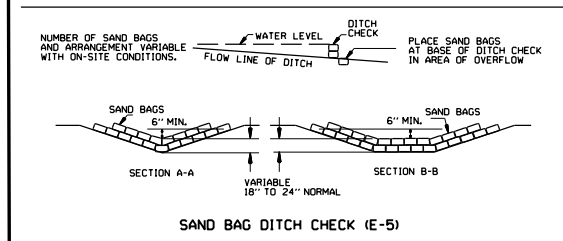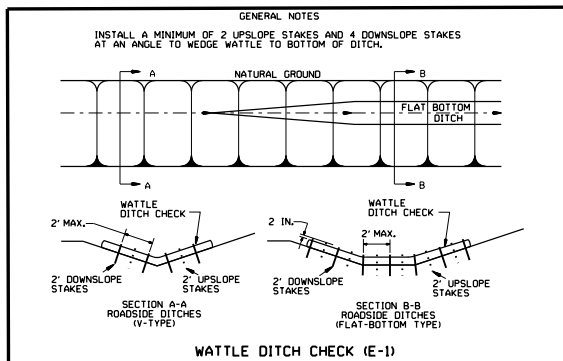

11-16-17	ADDED FILTER SOCK E-3 AND E-13	
12-15-11	DELETED BALED STRAW DITCH CHECK & ADDED WATTLE DITCH CHECK	
11-18-98	ADDED NOTES	
07-02-98	ADDED BALED STRAW FILTER BARRIER (E-2)	
07-20-95	REVISED SILT FENCE E-4 AND E-11	7-20-95
07-15-94	REV. E-4 & E-11 MIN. 18' BURIED END OF FABRIC	6-2-94
06-02-94	REVISED E-1, E-7 & 8, DELETED E-2 & 3	
04-03-93	REDRAWN	
10-01-92	REDRAWN	
08-02-76	ISSUED R.O.M.	298-T-28-76
DATE	REVISION	FILED

ARKANSAS STATE HIGHWAY COMMISSION
TEMPORARY EROSION CONTROL DEVICES
STANDARD DRAWING TEC-1

ARKANSAS STATE HIGHWAY COMMISSION



STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION

EDITION OF 2014

PROPOSAL DOCUMENTS AND SCHEDULE OF ITEMS

ARKANSAS STATE HIGHWAY COMMISSION

PROPOSAL DOCUMENTS

PROPOSAL FOR CONSTRUCTING:

THE PURPOSE OF THIS PROJECT IS TO OVERLAY APPROXIMATELY 23.707 MILES OF HIGHWAY 130 IN ARKANSAS COUNTY. THIS PROJECT CONSISTS OF REMOVAL AND DISPOSAL OF GUARDRAIL, TRENCHING AND SHOULDER PREPARATION, AGGREGATE BASE COURSE, ACHM BINDER AND SURFACE COURSES, COLD MILLING ASPHALT PAVEMENT, ACHM PATCHING OF EXISTING ROADWAY, APPROACH GUTTERS, MAINTENANCE OF TRAFFIC, GUARDRAIL, EROSION CONTROL, RUMBLE STRIPES, PAVEMENT MARKING, AND MISC. ITEMS.

State Highway 130, Section 6, in **ARKANSAS** County, Arkansas, in accordance with Standard Specifications for Highway Construction, Edition of 2014; the Supplemental Specifications and Special Provisions attached hereto; and the Construction Plans on file in the Office of the State Highway Commission, designated as

Job **A20044** **FEDERAL AID PROJECT STPR-0001(103)**

Job Name: **HWY. 165 – HWY. 152 (S)**

said project being approximately **23.707 miles in length.**

Proposal received until 1:30 p.m. on November 4, 2026

TO THE ARKANSAS STATE HIGHWAY COMMISSION:

Gentlemen: By submission of your bid, you agree to the following:

It is hereby certified that a careful examination has been made of the Plans, Specifications, Supplemental Specifications, Special Provisions, and Form of Contract and the site of the work throughout its whole extent. On the basis of the Plans, Specifications, Supplemental Specifications, Special Provisions, and Form of Contract, the bidder proposes to furnish all necessary machinery, equipment, tools, labor and other means of construction, and to furnish all materials as specified, in the manner and at the time prescribed, and to finish the entire project within the time hereinafter proposed. The bidder understands that the quantities of work mentioned herein are approximate only, and are subject to increase or decrease, and hereby proposes to perform all quantities of work, whether increased or decreased, in accordance with the provisions of the Specifications, and at the unit prices bid in the attached Schedule of Items.

Receipt is hereby specifically acknowledged, and complete examination expressly guaranteed of the following:

1. Standard Specifications for Highway Construction, Edition of 2014.
2. Supplemental Specifications.
3. Special Provisions.
4. Proposal Documents.
5. Schedule of Items .
6. Construction Plans.

The bidder further proposes to perform all Extra Work that may be required, on the basis provided in the Specifications, and to give such work personal attention, and to secure economical performance.

The bidder further proposes to execute the contract agreement, and to furnish satisfactory bonds within ten days after he has received notice that he has been awarded the contract. The bidder further agrees to begin work when ordered by the Engineer, or within ten days thereafter, and to complete the work **on or before November 24, 2027.**

PROPOSAL DOCUMENTS

(Continued)

The bidder also proposes to furnish a surety Performance bond or bonds in a sum equal to the full amount of the contract and a surety Payment bond or bonds in a sum equal to 80% of the full amount of the contract. These bonds shall not only serve to guarantee the completion of the work and payment of all bills and claims by the bidder, but also to guarantee the excellence of both workmanship and material until the work is finally accepted and the provisions of the Plans, Specifications and Special Provisions fulfilled.

The bidder shall furnish a Proposal Guaranty in the form specified in Subsection 102.09 of the Specifications, in the amount of five percent (5%) of the total amount bid, which is submitted as a guarantee of the good faith of the proposal, and that the Bidder will enter into written contract, as provided, to do the work should the award be made to him; and it is hereby agreed that if, at any time other than as provided in Subsection 102.11 of the Standard Specifications, Withdrawal/Modification of Proposals, the bidder should withdraw his proposal, or should fail to execute the contract and furnish satisfactory bonds as herein provided, if his proposal is accepted, the Arkansas State Highway Commission, in either of such events, shall be entitled and is hereby given the right to retain the Proposal Guaranty, not as a penalty, but as liquidated damages, it being understood and agreed by the bidder that the amount of the Proposal Guaranty is a reasonable sum to be fixed as liquidated damages considering the damages the Arkansas State Highway Commission will sustain in the event of the bidder's withdrawal of his proposal, or failure to execute the contract and furnish satisfactory bonds if his proposal is accepted, and said amount is herein agreed upon and fixed as liquidated damages because of the difficulty of ascertaining the exact amount of damage that may be sustained by reason of the above set out circumstances.

Arkansas Department of Transportation
Schedule of Items

State Job No.: A20044
Job Name: HWY. 165 – HWY. 152 (S)
Federal Aid Project: STPR-0001(103)

Date Estimated: 9/4/2026
Date Revised:

Line Number	Item Code and Description	Estimated Quantity	Unit Bid Price	Price Extension
Section 01 - PROPOSAL ITEMS				
0001	202 - REMOVAL AND DISPOSAL OF GUARDRAIL	1,866.000 LF		
0002	SP&215 - TRENCHING AND SHOULDER PREPARATION	1,196.000 STA		
0003	SPSS303 - AGGREGATE BASE COURSE (CLASS 7)	9,472.000 TON		
0004	SS&401 - TACK COAT	33,076.000 GAL		
0005	SPSS406 - MINERAL AGGREGATE IN ACHM BINDER COURSE (1")	12,090.000 TON		
0006	SPSS406 - ASPHALT BINDER (PG 70-22) IN ACHM BINDER COURSE (1") (MINIMUM BID \$120.00)	610.000 TON		
0007	SPSS407 - MINERAL AGGREGATE IN ACHM SURFACE COURSE (1/2")	41,909.000 TON		
0008	SPSS407 - ASPHALT BINDER (PG 70-22) IN ACHM SURFACE COURSE (1/2") (MINIMUM BID \$120.00)	2,533.000 TON		
0009	SP&412 - COLD MILLING ASPHALT PAVEMENT	8,446.000 SQYD		
0010	SPSS414 - ASPHALT CONCRETE PATCHING FOR MAINTENANCE OF TRAFFIC	625.000 TON		
0011	SPSS415 - ACHM PATCHING OF EXISTING ROADWAY	800.000 TON		
0012	SPSS504 - APPROACH GUTTERS	48.540 CUYD		
0013	SS&603 - MAINTENANCE OF TRAFFIC	1.000 L.S.		
0014	SS&604 - SIGNS	4,139.000 SQFT		
0015	SPSS604 - CONSTRUCTION PROJECT INFORMATION SIGN UPDATE	2.000 EACH		
0016	SS&604 - TRAFFIC DRUMS	80.000 EACH		
0017	604 - CONSTRUCTION PAVEMENT MARKINGS	413,168.000 LF		
0018	604 - REMOVABLE CONSTRUCTION PAVEMENT MARKINGS	5,599.000 LF		
0019	SS&604 - VERTICAL PANELS	80.000 EACH		
0020	SS&617 - GUARDRAIL (TYPE A)	3,382.000 LF		
0021	SS&617 - GUARDRAIL TERMINAL (TYPE 2)	26.000 EACH		
0022	620 - LIME	23.000 TON		
0023	620 - SEEDING	11.500 ACRE		

Arkansas Department of Transportation
Schedule of Items

State Job No.: A20044

Job Name: HWY. 165 – HWY. 152 (S)

Federal Aid Project: STPR-0001(103)

Date Estimated: 9/4/2026

Date Revised:

Line Number	Item Code and Description	Estimated Quantity	Unit Bid Price	Price Extension
0024	SS&620 - MULCH COVER	23.000 ACRE		
0025	620 - WATER	1,407.600 MGAL		
0026	621 - TEMPORARY SEEDING	11.500 ACRE		
0027	621 - SILT FENCE	2,500.000 LF		
0028	621 - SAND BAG DITCH CHECKS	700.000 BAG		
0029	621 - SEDIMENT REMOVAL AND DISPOSAL	93.000 CUYD		
0030	SP&635 - ROADWAY CONSTRUCTION CONTROL	1.000 L.S.		
0031	SP&642 - RUMBLE STRIPES IN ASPHALT SHOULDERS	179,022.000 LF		
0032	SP&642 - CENTERLINE RUMBLE STRIPES IN ASPHALT ROADWAYS	111,888.000 LF		
0033	SP - PORTABLE TRAFFIC SIGNAL SYSTEM - ACTUATED	21.000 WEEK		
0034	718 - REFLECTORIZED PAINT PAVEMENT MARKING WHITE (10")	130.000 LF		
0035	718 - REFLECTORIZED PAINT PAVEMENT MARKING YELLOW (10")	202.000 LF		
0036	719 - THERMOPLASTIC PAVEMENT MARKING WHITE (6")	251,328.000 LF		
0037	719 - THERMOPLASTIC PAVEMENT MARKING WHITE (24")	110.000 LF		
0038	719 - THERMOPLASTIC PAVEMENT MARKING YELLOW (6")	161,840.000 LF		
0039	721 - RAISED PAVEMENT MARKERS (TYPE II)	1,578.000 EACH		
0040	SS&734 - BRIDGE END TERMINAL	2.000 EACH		
0041	SS&804 - REINFORCING STEEL-ROADWAY (GRADE 60)	3,306.000 LB		
			Section 01 Total: _____	
			Subtotal: _____	
0042	601 - MOBILIZATION (UNIT BID AMOUNT MAY NOT EXCEED 5% OF SUBTOTAL)	1.000 L.S.		
			Bid Total: _____	

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENT TO PROPOSAL
ANTI-COLLUSION AND DEBARMENT CERTIFICATION

**FAILURE TO EXECUTE AND SUBMIT THIS CERTIFICATION SHALL RENDER THIS
BID NONRESPONSIVE AND NOT ELIGIBLE FOR AWARD CONSIDERATION.**

As a condition precedent to the acceptance of the bidding document for this project, the bidder shall file this Affidavit executed by, or on behalf of the person, firm, association, or corporation submitting the bid. The original of this Affidavit shall be filed with the Arkansas Department of Transportation **at the time proposals are submitted.**

A F F I D A V I T

I hereby certify, under penalty of perjury under the laws of the United States and/or the State of Arkansas, that the bidder listed below has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with the submitted bid for this project, is not presently barred from bidding in any other jurisdiction as a result of any collusion or any other action in restraint of free competition, and that the foregoing is true and correct.

Further, that except as noted below, the bidder, or any person associated therewith in the capacity of owner, partner, director, officer, principal investigator, project director, manager, auditor, or any position involving the administration of Federal funds:

- a. is not currently under suspension, debarment, voluntary exclusion, or determination of ineligibility by any Federal, State, or Local agency;
- b. has not been suspended, debarred, voluntarily excluded or determined ineligible by any Federal, State, or Local agency within the past 3 years;
- c. does not have a proposed debarment pending; and
- d. has not been indicted, convicted, or had an adverse civil judgment rendered by a court of competent jurisdiction in any matter involving fraud or official misconduct within the past 3 years.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENT TO PROPOSAL
ANTI-COLLUSION AND DEBARMENT CERTIFICATION

**FAILURE TO EXECUTE AND SUBMIT THIS CERTIFICATION SHALL RENDER THIS
BID NONRESPONSIVE AND NOT ELIGIBLE FOR AWARD CONSIDERATION.**

EXCEPTIONS:

APPLIED TO	INITIATING AGENCY	DATES OF ACTION

Exceptions will not necessarily result in denial of award, but will be considered in determining bidder responsibility. Providing false information may result in criminal prosecution or administrative sanctions.

Job No. _____	_____
	(Name of Bidder)
F.A.P. No. _____	_____
	(Signature)
_____	_____
(Date Executed)	(Title of Person Signing)

The following Notary Public certification is **OPTIONAL** and may or may not be completed at the contractor's discretion.

State of _____)
County of _____)ss.

_____, being duly sworn, deposes and says that he is

_____ of _____
(Title) (Name of Bidder)

and that the above statements are true and correct.

Subscribed and Sworn to before me this _____ day of _____, 20____.
My commission expires: _____.

(NOTARY SEAL)

(Notary Public)



SUPPLEMENT TO THE PROPOSAL CERTIFICATION FOR BOYCOTT AND ILLEGAL IMMIGRANT RESTRICTIONS

Pursuant to Arkansas law, a vendor must submit the below certifications prior to entering into a contract with a public entity for an amount as designated by the applicable laws.

- 1. Israel Boycott Restriction:** For contracts valued at \$1,000 or greater.
A public entity shall not enter into a contract with a company unless the contract includes a written certification that the person or company is not currently engaged in a boycott of Israel. If at any time after signing this certification the contractor decides to engage in a boycott of Israel, the contractor must notify the contracting public entity in writing. See Arkansas Code Annotated § 25-1-503.
- 2. Illegal Immigrant Restriction:** For contracts exceeding \$25,000.
No state agency may enter into or renew a public contract for services with a contractor who employs or contracts with an illegal immigrant. A contractor shall certify that it does not employ, or contract with, illegal immigrants. See Arkansas Code Annotated § 19-11-105.
- 3. Energy, Fossil Fuel, Firearms, and Ammunition Industries Boycott Restriction:** For contracts valued at, or exceeding, \$75,000.
A public entity shall not enter into a contract with a company unless the contract includes a written certification that the person or company is not currently engaged in, and agrees for the duration of the contract not to engage in, a boycott of an Energy, Fossil Fuel, Firearms, or Ammunition Industry. If a company does boycott any of these industries, see Arkansas Code Annotated § 25-1-1102.
- 4. Scrutinized Company Restriction:** Required with bid or proposal submission.
A state agency shall not contract with a Scrutinized Company or a company that employs a Scrutinized Company as a subcontractor. A Scrutinized Company is a company owned in whole or with a majority ownership by the government of the People's Republic of China. A state agency shall require a company that submits a bid or proposal for a contract to certify that it is not a Scrutinized Company and does not employ a Scrutinized Company as a subcontractor. See Arkansas Code Annotated § 25-1-1203.

The bidder hereby agrees and certifies that it does not, and shall not for the remaining aggregate term of the contract, participate in the activities checked below:

- ☐ Do not boycott Israel.
- ☐ Do not employ illegal immigrants.
- ☐ Do not boycott Energy, Fossil Fuel, Firearms, or Ammunition Industries.
- ☐ Do not employ a Scrutinized Company as a subcontractor.

Job No.	
F.A.P. No.	
Name of Bidder	

Bidder Signature

Date

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENT TO PROPOSAL
CERTIFICATION FOR FEDERAL-AID CONTRACTS

The prospective contractor certifies, by signing and submitting this proposal, to the best of his or her knowledge and belief that:

1. No Federal appropriated funds have been paid or will be paid, by or on his or her behalf, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a member of Congress, an officer or employee of Congress, or any employee of a member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.
2. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a member of Congress, an officer or employee of Congress, or an employee of a member of Congress in connection with this Federal-Aid contract, the prospective contractor shall complete and submit Standard Form-LLL, "Disclosure of Lobbying Activities", in accordance with its instructions. (Available from Arkansas Department of Transportation, Program Management Division.)

This Certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. This Certification is a prerequisite for making or entering into this transaction imposed by Section 1352, Title 31, U.S. Code.

During the period of performance of the contract, the contractor and all lower tier subcontractors must file a Form-LLL at the end of each calendar year quarter in which there occurs any event that requires disclosure or that materially affects the accuracy of the information contained in any previously filed disclosure form. Any person who fails to file the required Certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each failure.

The prospective contractor also agrees by submitting his or her proposal that he or she shall require that the language of this Certification be included in all lower tier subcontracts which exceed \$100,000 and that all such subcontractors shall certify and disclose accordingly.

ARKANSAS DEPARTMENT OF TRANSPORTATION
SUPPLEMENT TO PROPOSAL
C E R T I F I C A T I O N

THIS CERTIFICATION SHALL BE COMPLETED BY THE BIDDER
AS PART OF THIS PROPOSAL

The bidder ____, proposed subcontractor ____, hereby certifies that he has ____, has not ____, participated in a previous contract or subcontract subject to the equal opportunity clause, as required by Executive Orders 10925, 11114, or 11246, and that he has ____, has not ____, filed with the Joint Reporting Committee, the Director of the Office of Federal Contract Compliance, a Federal Government contracting or administering agency, or the former President's Committee on Equal Employment Opportunity, all reports due under the applicable filing requirements.

(Currently, Standard Form 100 [EEO-1] is the only report required by the Executive Orders or their implementing regulations)

Job No. _____ (Company) _____

F.A.P. No. _____ By: _____

Date _____ (Title) _____

NOTE: The above certification is required by the Equal Employment Opportunity Regulations of the Secretary of Labor (41 CFR 60-1.7(b)(1)), and must be submitted by bidders and proposed subcontractors only in connection with contracts and subcontracts which are subject to the equal opportunity clause. Contracts and subcontracts which are exempt from the equal opportunity clause are set forth in 41 CFR 60-1.5. (Generally only contracts or subcontracts of \$10,000 or under are exempt.)

Proposed prime contractors and subcontractors who have participated in a previous contract or subcontract subject to the Executive Orders and have not filed the required reports should note that 41 CFR 60-1.7(b)(1) prevents the award of contracts and subcontracts unless such contractor submits a report covering the delinquent period or such other period specified by the Federal Highway Administration or by the Director, Office of Federal Contract Compliance, U.S. Department of Labor.

ARKANSAS DEPARTMENT OF TRANSPORTATION

SUPPLEMENT TO PROPOSAL

USE OF FOREIGN MADE UNMANNED AIRCRAFT SYSTEMS

In accordance with Office of Management and Budgets Memo M-26-02 and the American Security Drone Act, all contractors, subcontractors, or consultants utilizing a unmanned aircraft system (UAS) aircraft, flight controller, camera, or ground control station supplied by a manufacturer that is based in, or subject to the control of, a foreign adversary country, specifically the People's Republic of China, are directed to cease using the systems for activities associated with the contract pay items of Roadway Construction Control or Bridge Construction Control on federal aid projects.

Security risks have been found to exist on data collected by foreign manufactured drones and the federal government has issued restrictions on their use on federally funded projects. The use of foreign made drones may continue for applications not directly paid for by the Department, such as project update overflights, promotional or recruiting purposes, etc., but the Department strongly encourages that the overall use of foreign manufactured UAS be suspended in all contractor operations.

USE OF FOREIGN MADE UNMANNED AIRCRAFT SYSTEMS

As an authorized representative of this company, I hereby certify that any unmanned aircraft systems to be used or actually used on this federal aid project comply with the above referenced restrictions.

Job No.	_____	_____
		(Company)
F.A.P. No.	_____	By: _____
Date	_____	_____
		(Title)

ARKANSAS DEPARTMENT OF TRANSPORTATION

BIDDERS LIST

JOB NUMBER A20044 LETTING DATE November 4, 2026
 JOB NAME HWY. 165 – HWY. 152 (S)
 CONTRACTOR _____

➔ **ENTER THE WORK CODES TO BE PERFORMED BY THE PRIME CONTRACTOR**

The Department is required by 49 CFR 26.11, to create and maintain a master bidder's list of all firms attempting to participate on federally assisted projects. The Contractor shall provide the names and addresses of all subcontractors, truckers or material suppliers that bid or provided quotes on any item on the project, regardless of whether the quotes were used in preparing the proposal or not. Place an X in the box following the firm's name if DBE Contractor. Denote the firm's and annual gross receipts by checking the appropriate box. The general type of work to be performed should be indicated using the following codes; (01) removal and disposal items (including clearing and grubbing), (02) earthwork (including drainage items), (03) hauling, (04) paving (PCCP or ACHM), (05) miscellaneous concrete, (06) traffic control, (07) erosion control, (08) signals/electrical, (09) structures (includes steel suppliers), (10) material (aggregate) supplier (11) miscellaneous *items should be shown*. See <https://www.census.gov/naics/> for the NAICS codes to enter in the last column. Please contact the Department's Civil Rights Division at (501) 569-2297 with any questions.

Firm Name Address/Phone	DBE	Age of Firm	Annual Gross Receipts	Type of Work (Enter Code)	NAICS code (Enter Code)
		☐ Less than 1 year ☐ 1- 3 years ☐ 4-7 years ☐ 8-10 years ☐ More than 10 years	☐ Less than \$1 million ☐ \$1-3 million ☐ \$3-6 million ☐ \$6-10 million ☐ Greater than \$10 million		
		☐ Less than 1 year ☐ 1- 3 years ☐ 4-7 years ☐ 8-10 years ☐ More than 10 years	☐ Less than \$1 million ☐ \$1-3 million ☐ \$3-6 million ☐ \$6-10 million ☐ Greater than \$10 million		
		☐ Less than 1 year ☐ 1- 3 years ☐ 4-7 years ☐ 8-10 years ☐ More than 10 years	☐ Less than \$1 million ☐ \$1-3 million ☐ \$3-6 million ☐ \$6-10 million ☐ Greater than \$10 million		
		☐ Less than 1 year ☐ 1- 3 years ☐ 4-7 years ☐ 8-10 years ☐ More than 10 years	☐ Less than \$1 million ☐ \$1-3 million ☐ \$3-6 million ☐ \$6-10 million ☐ Greater than \$10 million		
		☐ Less than 1 year ☐ 1- 3 years ☐ 4-7 years ☐ 8-10 years ☐ More than 10 years	☐ Less than \$1 million ☐ \$1-3 million ☐ \$3-6 million ☐ \$6-10 million ☐ Greater than \$10 million		