





Note.- Bend straps sideways :  
down down connections



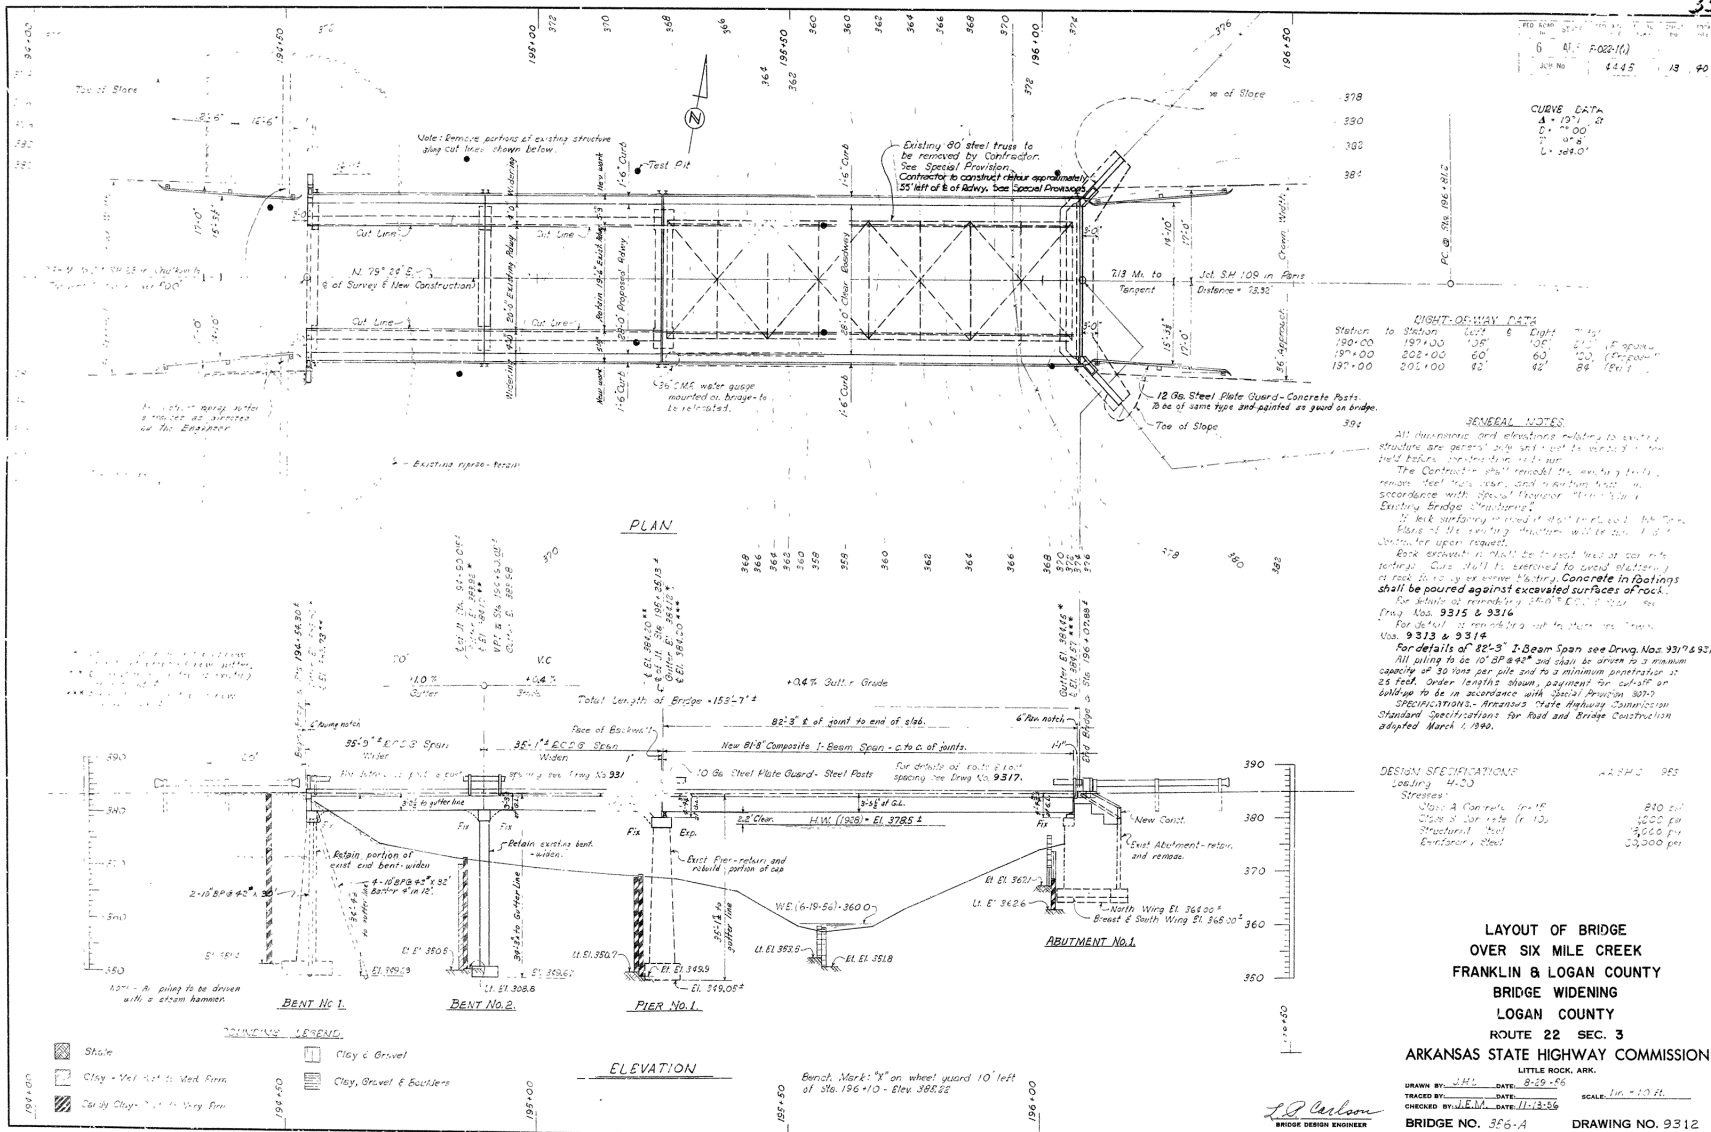




FISCAL YEAR	Job No.	SHEET TOTAL
1928	860	4

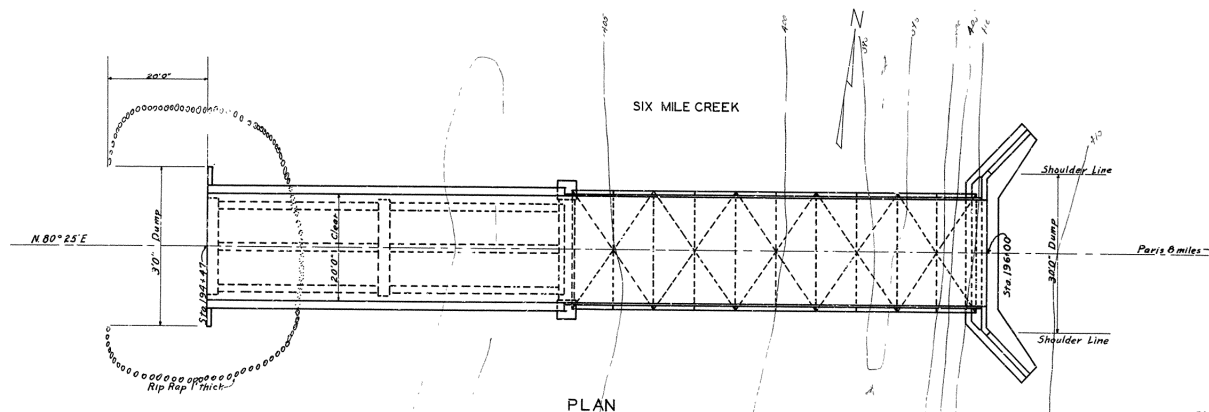

NOTE  
See Drawgs No. 93, 179, 045, 826, & 827 for Details

QUANTITIES

No. 13 Dry Excavation for Structures	176 Cu. Yd.
13 Wet Excavation for Structures	330 Cu. Yd.
13 Solid Rock Excavation for Structures	31 Cu. Yd.
34 Class "A" Concrete	177.02 Cu. Yd.
54 Class "D" Concrete	136.64 Cu. Yd.
55 Reinforcing Steel	43,120 Lb.
36 Struc. Steel in Truss Bridges	61,800 Lb.
63 Rip Rap 1 1/2" thick	110 Sp. Yd.
74 Concrete Railing for Structures	147 Lin. Ft.

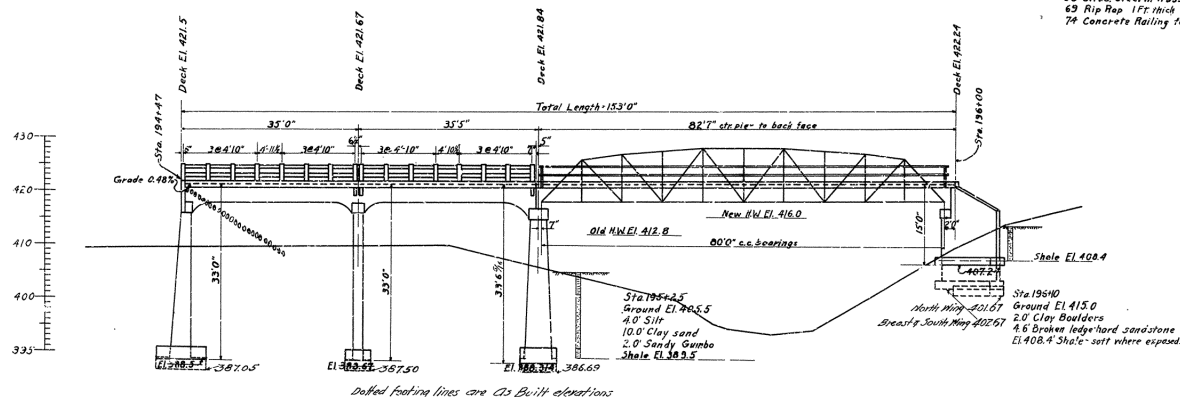

B.M. Spike in 10" Forked Locust  
90° Rte Sta 195+00 Elev 411.74  
Drainage Hinge 108.0 Sp. miles.

ELEVATION

LAYOUT

SIX MILE CREEK LOGAN CO

ROUTE 22 SEC. 3

ARKANSAS STATE HIGHWAY DEPARTMENT  
LITTLE ROCK, ARK.

Drawn By: SEA Date: 5/2/28  
Traced By: SEA Date: 5/2/28  
Checked By: SEA Date: 5/2/28

BRIDGE ENGINEER

BRIDGE NO. 356

DRAWING NO. 824