

This Addendum must be signed and either emailed to pwitcher@mce.us.com or faxed back to the office of McClelland Consulting Engineers, Inc. at (501) 371-9932 to acknowledge receipt 24 hours prior to the bid opening.

Signature: _____

Company: _____

ADDENDUM NO. 2

DATE: September 18, 2026

RE: CONGO RD./SHENANDOAH RD. ROUNDABOUT (BENTON) (S), F.A.P. STPU-9035(26), ARDOT JOB NO. 061717 – 21-5829

FROM: McClelland Consulting Engineers, Inc.
7302 Kanis Road
Little Rock, Arkansas 72204
Phone: 501/371-0272

TO: PROSPECTIVE BIDDERS:

This Addendum forms a part of the Contract Documents and modifies the original Bidding Documents dated **September 3, 2026** as noted below. Acknowledge receipt of the Addendum in the space provided on the Bid Form. Failure to do so may subject the Bidder to disqualification.

This Addendum consists of 16 page(s).

DRAWING(S)

1. Sheet 2, Index of Sheet, Std. Drawings, Gov. Specs, & General Notes:
 - Replace with attached revised Sheet 2, Index of Sheet, Std. Drawings, Gov. Specs, & General Notes.
2. Sheet 20, Summary of Quantities and Revisions:
 - Replace with attached revised Sheet 20 Summary of Quantities and Revisions

SPECIFICATION(S)

1. Document 00300, Bid Form:
 - Replace with attached revised Document 00300, Bid Form. Line Item 29, 31 and 33 have been struck through.
3. Section 01025, Measurement and Payment:
 - Replace page 7 of Section 01025, Measurement and Payment. Line Item 29, 31 and 33 have been struck through.

4. Include Special Provision, Textured Coating Finish (Cast-in-Place Retaining Walls) into the Contract documents.
5. Include Special Provision, Architectural Finish (Cast-in-Place Retaining Walls) into the Contract Documents.

END OF ADDENDUM

W:\2021\21-5829 (Benton) (S) Job No. 061717 Congo Rd. And Sherandoah Rd. Inters. Improvts\Design Drawings\Sheets\21-5829 - 1 Cover.dwg, PRINTED ON: September 18, 2026 @ 11:48 AM

INDEX OF SHEETS		
SHEET NO.	TITLE	
1	TITLE SHEET	
2	INDEX OF SHEETS, STD. DRAWINGS, GOV. SPECS., AND GENERAL NOTES	
3	TYPICAL SECTIONS OF IMPROVEMENT	
4 - 7	SPECIAL DETAILS	
8	TEMPORARY EROSION CONTROL DETAILS	
9	MAINTENANCE OF TRAFFIC STAGE 1 DETAILS	
10	MAINTENANCE OF TRAFFIC STAGE 1 DETOUR	
11	MAINTENANCE OF TRAFFIC STAGE 2 DETAILS	
12	MAINTENANCE OF TRAFFIC STAGE 3 DETAILS	
13	MAINTENANCE OF TRAFFIC STAGE 3 DETOUR	
14	PERMANENT PAVEMENT MARKING DETAILS	
15	PERMANENT SIGN DETAILS	
17 - 19	QUANTITIES	
20	SUMMARY OF QUANTITIES AND REVISIONS	
21	SURVEY CONTROL DETAILS - CL	
22	SURVEY CONTROL DETAILS - CURBS	
23	SURVEY CONTROL DETAILS - WALL	
22 - 24	PLAN	
25	PROFILE	
26	DRAINAGE PROFILE	
27	ROUNDBOUT PLAN AND PROFILE	
28 - 31	CROSS SECTIONS	
C01	UTILITY RELOCATIONS - PLAN	
C02	UTILITY RELOCATIONS - PROFILES	
C03	UTILITY RELOCATIONS - QUANTITIES	
E01	LEGEND	
E02	PHOTOMETRIC PLAN	
E03	ELECTRICAL ROADWAY PLAN	
E04	ONE-LINE DIAGRAM	
E05	DETAILS	

GENERAL NOTES

- GRADE LINE DENOTES FINISHED GRADE WHERE SHOWN ON PLANS.
- ALL PIPE LINES, POWER, TELEPHONE, AND TELEGRAPH LINES TO BE MOVED OR LOWERED BY THE RESPECTIVE OWNERS AS PER AGREEMENT WITH SUCH OWNERS.
- ANY EQUIPMENT OR APPURTENANCE THAT INTERFERES WITH THE PROPOSED CONSTRUCTION AND WHICH MAY BE THE PROPERTY OF UTILITY SERVICE ORGANIZATIONS SHALL BE MOVED BY THE OWNERS UNLESS OTHERWISE PROVIDED.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING U. S. MAILBOXES WITHIN THE PROJECT LIMITS IN SUCH A MANNER THAT THE PUBLIC MAY RECEIVE CONTINUED MAIL SERVICE. PAYMENT WILL BE CONSIDERED INCLUDED IN THE PRICE BID FOR THE VARIOUS BID ITEMS.
- ALL LAND MONUMENTS LOCATED WITHIN THE CONSTRUCTION AREA SHALL BE PROTECTED IN ACCORDANCE WITH SECTION 107.12 OF THE STANDARD SPECIFICATIONS.
- ALL TREES THAT DO NOT DIRECTLY INTERFERE WITH THE PROPOSED CONSTRUCTION SHALL BE SPARED AS DIRECTED BY THE ENGINEER. CARE AND DISCRETION SHALL BE USED TO ENSURE THAT ALL TREES NOT TO BE REMOVED SHALL BE HARMED AS LITTLE AS POSSIBLE DURING THE CONSTRUCTION OPERATIONS.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING A FENCE TO CONTROL LIVESTOCK IN AREAS WHERE PASTURES ARE SEVERED. WIRE FENCE MAY BE CONSTRUCTED INITIALLY, OR IN LIEU THEREOF, THE CONTRACTOR AT HIS OWN EXPENSE, MAY ELECT TO PROVIDE TEMPORARY FENCING SUITABLE TO CONTAIN LIVESTOCK.
- THE SEQUENCE AS SHOWN ON THE MAINTENANCE OF TRAFFIC PLANS IS A GENERAL OUTLINE FOR THE CONSTRUCTION OF THIS PROJECT, AND IN NO WAY IS IT INTENDED TO COVER EVERY ITEM IN THE PROJECT. ITEMS NOT CRITICAL TO THE CONSTRUCTION SEQUENCE MAY BE CONSTRUCTED IN ANY STAGE AS APPROVED BY THE RESIDENT ENGINEER.
- ALL FLEXIBLE BASE AND ASPHALTIC PAVEMENTS REMOVED SHALL BE PAID FOR UNDER THE ITEM NO. 210 - UNCLASSIFIED EXCAVATION.
- THE EXISTING ASPHALT PAVEMENT TO BE REMOVED FROM THE REMAINING PAVEMENT SHALL BE SEPARATED BY SAWING ALONG A NEAT LINE. AFTER SAWING, THE PAVEMENT TO BE REMOVED SHALL BE CAREFULLY REMOVED IN A MANNER THAT WILL NOT DAMAGE THE PAVEMENT THAT IS TO REMAIN. ANY DAMAGE OF THE ASPHALT PAVEMENT THAT IS TO REMAIN IN PLACE SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE.

ROADWAY STANDARD DRAWINGS

DRWG.NO.	TITLE	DATE
CG-1	CURBING DETAILS	11-29-07
DR-1	DETAILS OF DRIVEWAYS & ISLANDS	05-19-22
FES-1	FLARED END SECTION	10-18-96
FES-2	FLARED END SECTION	10-18-96
FPC-9	DETAILS OF DROP INLETS & JUNCTION BOXES	11-16-01
FPC-9M	DETAILS OF DROP INLET (TYPE MO)	08-22-02
MB-1	MAILBOX DETAILS	11-18-04
PCC-1	CONCRETE PIPE CULVERT FILL HEIGHTS & BEDDING	02-27-14
PCP-1	PLASTIC PIPE CULVERT (HIGH DENSITY POLYETHYLENE)	02-27-14
PCP-2	PLASTIC PIPE CULVERT (PVC F949)	02-27-14
PCP-3	PLASTIC PIPE CULVERT (POLYPROPYLENE)	02-27-20
PM-1	PAVEMENT MARKING DETAILS	02-27-20
SI-1	DETAILS OF SPECIAL ITEMS	10-25-18
SI-3	CONCRETE WALK (TYPE SPECIAL)	11-05-20
TC-1	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	11-07-19
TC-2	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	05-20-21
TC-3	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	08-12-21
TC-4	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION-TEMPORARY PRECAST BARRIER	11-07-19
TC-5	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION-TEMPORARY PRECAST BARRIER	11-07-19
TEC-1	TEMPORARY EROSION CONTROL DEVICES	11-16-17
TEC-2	TEMPORARY EROSION CONTROL DEVICES	06-02-94
TEC-3	TEMPORARY EROSION CONTROL DEVICES	11-03-94
WR-1	WHEELCHAIR RAMPS NEW CONSTRUCTION AND ALTERATIONS	11-10-05

GOVERNING SPECIFICATIONS

ARKANSAS STATE HIGHWAY COMMISSION STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION, EDITION OF 2014, AND THE FOLLOWING SPECIAL PROVISIONS AND SUPPLEMENTAL SPECIFICATIONS:

NUMBER	TITLE
FHWA-1273	REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - NOTICE TO CONTRACTORS
FHWA-1273	SUPPLEMENT - SPECIFIC EQUAL EMPLOYMENT OPPORTUNITY RESPONSIBILITIES (23 U.S.C. 140)
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - GOALS AND TIMETABLES
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - FEDERAL STANDARDS
FHWA-1273	SUPPLEMENT - POSTERS AND NOTICES REQUIRED FOR FEDERAL-AID PROJECTS
100-3	CONTRACTOR'S LICENSE
100-4	DEPARTMENT NAME CHANGE
102-2	ISSUANCE OF PROPOSALS
105-4	MAINTENANCE DURING CONSTRUCTION
107-2	RESTRAINING CONDITIONS
108-1	LIQUIDATED DAMAGES
108-2	WORK ALLOWED PRIOR TO ISSUANCE OF WORK ORDER
110-1	PROTECTION OF WATER QUALITY AND WETLANDS
210-1	UNCLASSIFIED EXCAVATION
303-1	AGGREGATE BASE COURSE
306-1	QUALITY CONTROL AND ACCEPTANCE
307-1	CEMENT
308-1	CEMENT
400-1	TACK COATS
400-4	DESIGN AND QUALITY CONTROL OF ASPHALT MIXTURES
400-5	PERCENT AIR VOIDS FOR ACHM MIX DESIGNS
400-6	LIQUID ANTI-STRIP ADDITIVE
400-7	TRACKLESS TACK
404-3	DESIGN OF ASPHALT MIXTURES
410-1	CONSTRUCTION REQUIREMENTS AND ACCEPTANCE OF ASPHALT CONCRETE PLANT MIX COURSES
410-2	DEVICES FOR MEASURING DENSITY FOR ROLLING PATTERNS
410-4	EVALUATION OF ACHM SUBLOT REPLACEMENT MATERIAL
501-2	CEMENT
505-1	PORTLAND CEMENT CONCRETE DRIVEWAY
600-2	INCIDENTAL CONSTRUCTION
604-1	RETROREFLECTIVE SHEETING FOR TRAFFIC CONTROL DEVICES IN CONSTRUCTION ZONES
604-3	TRAFFIC CONTROL DEVICES IN CONSTRUCTION ZONES (MASH)
620-1	MULCH COVER
621-1	FILTER SOCKS
632-1	CONCRETE ISLAND
633-1	CONCRETE WALKS, CONCRETE STEPS, AND HAND RAILING
634-1	CURBING
802-4	CEMENT
JOB 061717	ARCHITECTURAL FINISH (CAST-IN PLACE RETAINING WALLS)
JOB 061717	BROADBAND INTERNET SERVICE FOR ASPHALT CONCRETE PLANT
JOB 061717	BUY AMERICA - CONSTRUCTION MATERIALS
JOB 061717	CLASS C FLY ASH IN PORTLAND CEMENT CONCRETE PAVEMENT AND CLASS S(AE) CONCRETE
JOB 061717	DESIGN AND QUALITY CONTROL OF ASPHALT MIXTURES
JOB 061717	DISADVANTAGED BUSINESS ENTERPRISE BIDDER'S RESPONSIBILITIES
JOB 061717	FLEXIBLE BEGINNING OF WORK
JOB 061717	PRICE ADJUSTMENT FOR ASPHALT BINDER
JOB 061717	PRICE ADJUSTMENT FOR FUEL
JOB 061717	PROHIBITION OF CERTAIN TELECOMMUNICATIONS AND VIDEO SURVEILLANCE SERVICES OR EQUIPMENT
JOB 061717	SHORING FOR CULVERTS
JOB 061717	STORM WATER POLLUTION PREVENTION PLAN
JOB 061717	SUBMISSION OF ASPHALT CONCRETE HOT MIX ACCEPTANCE TEST RESULTS
JOB 061717	TEXTURED COATING FINISH (CAST-IN PLACE RETAINING WALLS)
JOB 061717	UTILITY ADJUSTMENTS
JOB 061717	WARM MIX ASPHALT
JOB 061717	DIFFERING SITE CONDITIONS AND TEMPORARY SUSPENSIONS OF WORK
JOB 061717	PRECAST MODULAR BLOCK GRAVITY RETAINING WALL

McCLELLAND

DESIGNED TO SERVE

CONSULTING

ENGINEERS, INC.

7302 KANIS RD.

LITTLE ROCK, ARKANSAS 72204

(501) 371-0272

HTTP://WWW.MCE.US.COM

ORIGINAL SIGNATURE ON FILE

CONGO RD./SHENANDOAH RD.
ROUNDBOUT (BENTON) (S)
BENTON, ARKANSAS

811

Know what's below.
Call before you dig.

REVIEWS		DESCRIPTION	DATE	REV
		ADDED 2 SPECIAL PROVISIONS	9/18/2026	2

INDEX OF SHEETS, STD. DRAWINGS, GOV. SPECS, & GENERAL NOTES

DESIGNED BY: CGS	DRAWN BY: CGS
DATE: 9/18/2026	REVISION: 60%
SCALE: N/A	JOB NUMBER: 061717

2

SUMMARY OF QUANTITIES (1 OF 2)

ITEM NUMBER	ITEM	QUANTITY	UNIT
201	CLEARING	3	STATION
201	GRUBBING	3	STATION
202	REMOVAL AND DISPOSAL OF CURB AND GUTTER	344	LIN. FT.
202	REMOVAL AND DISPOSAL OF CONCRETE DRIVEWAYS	70	SQ. YD.
202	REMOVAL AND DISPOSAL OF DROP INLETS	1	EACH
202	REMOVAL AND DISPOSAL OF PIPE CULVERTS	2	EACH
SP, SS, & 303	AGGREGATE BASE COURSE (CLASS 7)	663	TON
SP, SS, & 308	AGGREGATE IN CEMENT STABILIZED CRUSHED STONE BASE COURSE	17	TON
SS & 308	CEMENT IN CEMENT STABILIZED CRUSHED STONE BASE COURSE	1	TON
SS & 308	PROCESSING CEMENT STABILIZED CRUSHED STONE BASE COURSE	51	SQ. YD.
SP, SS, & 309	PORTLAND CEMENT CONCRETE BASE (5" UNIFORM THICKNESS)	20	SQ. YD.
SS & 401	TACK COAT	186	GAL.
SP, SS, & 406	MINERAL AGGREGATE IN ACHM BINDER COURSE (1")	12	TON
SP, SS, & 406	ASPHALT BINDER (PG 64-22) IN ACHM BINDER COURSE (1")	207	TON
SP, SS, & 407	MINERAL AGGREGATE IN ACHM SURFACE COURSE (1/2")	508	TON
SP, SS, & 407	ASPHALT BINDER (PG 64-22) IN ACHM SURFACE COURSE (1/2")	27	TON
SP & 412	COLD MILLING ASPHALT PAVEMENT	1399	SQ. YD.
SP, SS, & 505	PORTLAND CEMENT CONCRETE DRIVEWAY	69.33	SQ. YD.
601	MOBILIZATION	1.00	LUMP SUM
603	MAINTENANCE OF TRAFFIC	1.00	LUMP SUM
SS & 604	SIGNS	374	SQ. FT.
SS & 604	BARRICADES	40	LIN. FT.
SS & 604	TRAFFIC DRUMS	65	EACH
SS & 604	FURNISHING AND INSTALLING PRECAST CONCRETE BARRIER	520	LIN. FT.
604	CONSTRUCTION PAVEMENT MARKINGS	4909	LIN. FT.
604	CONSTRUCTION PAVEMENT MARKINGS (WORDS)	3	EACH
604	REMOVAL OF CONSTRUCTION PAVEMENT MARKINGS	1681	LIN. FT.
SS & 606	18" REINFORCED CONCRETE PIPE CULVERTS (CLASS III)	557	LIN. FT.
SS & 606	24" REINFORCED CONCRETE PIPE CULVERTS (CLASS III)	67	LIN. FT.
SS & 606	36" REINFORCED CONCRETE PIPE CULVERTS (CLASS III)	237	LIN. FT.
SS & 606	18" FLARED END SECTIONS FOR REINFORCED CONCRETE PIPE CULVERTS	1	EACH
SS & 609	DROP INLETS (TYPE MO)	12	EACH
SS & 609	JUNCTION BOXES (TYPE E)	2	EACH
SS & 609	DROP INLET EXTENSIONS (4')	11	EACH
SS & 609	DROP INLET EXTENSIONS (8')	4	EACH
620	LIME	1	TON
620	SEEDING	0.31	ACRE
SS & 620	MULCH COVER	0.31	ACRE
620	WATER	48.2	M. GAL.
621	SILT FENCE	575	LIN. FT.
621	SEDIMENT REMOVAL AND DISPOSAL	28	CU. YD.
621	ROCK DITCH CHECKS	19	CU. YD.
SS & 621	FILTER SOCK (12")	476	LIN. FT.
623	SECOND SEEDING APPLICATION	0.31	ACRE
624	SOLID SODDING	1320	SQ. YD.
SP, SS, & 632	CONCRETE ISLAND	327	SQ. YD.
SS & 633	CONCRETE WALKS	361	SQ. YD.
SP, SS, & 633	CONCRETE WALKS (TYPE SPECIAL)	18	SQ. YD.
SS & 634	CONCRETE CURB (TYPE A)	264	LIN. FT.
SS & 634	CONCRETE COMBINATION CURB AND GUTTER (TYPE A) (1' 6")	1171	LIN. FT.
SS & 634	CONCRETE COMBINATION CURB AND GUTTER (TYPE E-1) (2' 0")	320	LIN. FT.
635	ROADWAY CONSTRUCTION CONTROL	1.00	LUMP SUM
637	MAILBOXES	1	EACH
637	MAILBOX SUPPORTS (SINGLE)	1	EACH
SP, SS, & 641	WHEELCHAIR RAMPS (TYPE 3)	64	SQ. YD.
718	REFLECTORIZED PAINT PAVEMENT MARKING WHITE (12")	111	LIN. FT.
718	REFLECTORIZED PAINT PAVEMENT MARKING YELLOW (12")	431	LIN. FT.
719	THERMOPLASTIC PAVEMENT MARKING WHITE (6")	55	LIN. FT.
719	THERMOPLASTIC PAVEMENT MARKING WHITE (8")	184	LIN. FT.
719	THERMOPLASTIC PAVEMENT MARKING WHITE (12")	240	LIN. FT.
719	THERMOPLASTIC PAVEMENT MARKING YELLOW (6")	1661	LIN. FT.
719	THERMOPLASTIC PAVEMENT MARKING YELLOW (8")	358	LIN. FT.
719	THERMOPLASTIC PAVEMENT MARKING (YIELD LINE)	42	LIN. FT.
719	THERMOPLASTIC PAVEMENT MARKING (WORDS)	3	EACH
726	STANDARD SIGN	174	SQ. FT.
SS & 731	TEMPORARY IMPACT ATTENUATION BARRIER	2	EACH
SP	ARCHITECTURAL FINISH	83	SQ. FT.
SP	TEXTURED COATING FINISH	9	SQ. YD.
SP	GRAVITY BLOCK WALL	4497	SQ. FT.
SP	PEDESTRIAN GUARD	458	LIN. FT.

SUMMARY OF QUANTITIES (BOX 2 OF 2)


ITEM	QUANTITY	UNIT
UTILITY LINE ROUTE PREPARATION INCLUDING CLEARING & GRUBBING FOR WATER LINE CONSTRUCTION, COMPLETE	606	LIN. FT.
OPEN-CUT CONNECTION TO EXISTING 14" WATER LINE, COMPLETE	1	EACH
OPEN-CUT CONNECTION TO EXISTING 2" FORCE MAIN, COMPLETE	2	EACH
SWING CONNECTION TO EXISTING 6" WATERLINE, COMPLETE	2	EACH
CUT & CAP EXISTING LINE AFTER NEW LINE IS INSTALLED, COMPLETE - 6"	2	EACH
CUT & CAP EXISTING LINE AFTER NEW LINE IS INSTALLED, COMPLETE - 12"	1	EACH
CUT & CAP EXISTING LINE AFTER NEW LINE IS INSTALLED, COMPLETE - 14"	1	EACH
INSTALLATION OF 2" SDR 21 PVC FORCE MAIN, INCLUDING TRENCHING, BACKFILL, FITTINGS, ETC., COMPLETE	157	LIN. FT.
INSTALLATION OF 14" CL 250 DUCTILE IRON PIPE, INCLUDING TENCHING, BACKFILL, FITTINGS, ETC., COMPLETE	461	LIN. FT.
INSTALLATION OF 12" CL 350 DUCTILE IRON PIPE, INCLUDING TENCHING, COMPLETE	58	LIN. FT.
INSTALLATION OF 4" SDR 21 PVC ENCASEMENT OVER EXISTING 2" FORCE MAIN, COMPLETE	40	LIN. FT.
INSTALLATION OF CONCRETE ANCHOR COLLAR ON EXISTING 14" WATER LINE, COMPLETE	1	EACH
INSTALLATION OF TAPPING SLEEVE & GATE VALVE, COMPLETE - 12" X 6"	1	EACH
INSTALLATION OF TAPPING SLEEVE & GATE VALVE, COMPLETE - 12" X 12"	1	EACH
INSTALLATION OF TAPPING SLEEVE & GATE VALVE, COMPLETE - 14" X 12"	1	EACH
INSTALLATION OF TAPPING SLEEVE & GATE VALVE, COMPLETE - 14" X 14"	1	EACH
ABANDON EXISTING WATER VALVE IN PLACE	1	EACH
POST INSTALLATION WATER AND FORCE MAIN TESTING, COMPLETE	676	LIN. FT.
COMPACTED FULL-DEPTH ABC CLASS 7 TENCH BACKFILL, COMPLETE	70	LIN. FT.
REPAIR OF ASPHALT PAVEMENT FOR WATER LINE CONSTRUCTION, EXCLUDING ABC CLASS 7 BACKFILL, COMPLETE	70	LIN. FT.
ARKANSAS CODE ANN. 22-9-212, TENCH AND EXCAVATION SAFETY SYSTEM	1	LUMP SUM
ROADWAY LIGHTING SYSTEM	1	LUMP SUM

REVISIONS

[illegible]

MCE **McCLELLAND**
CONSULTING
ENGINEERS, INC.
DESIGNED TO SERVE

7302 KANIS RD.
LITTLE ROCK, ARKANSAS 72204
(501) 371-0272
[HTTP://WWW.MCE.US.COM](http://www.mce.us.com)

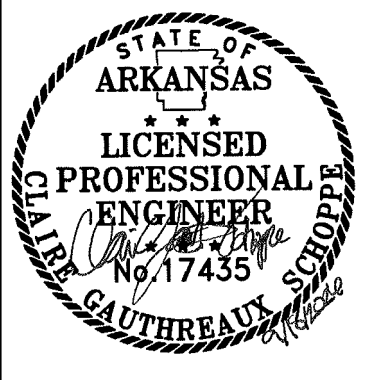

ORIGINAL SIGNATURE ON FILE

CONGO RD./SHENANDOAH RD.
 ROUNDABOUT (BENTON) (S)
 BENTON, ARKANSAS



**Know what's below.
Call before you dig**

REVISIONS		
REV	DATE	DESCRIPTION

SUMMARY OF QUANTITIES AND REVISIONS

DESIGNED BY: CGS	DRAWN BY: CGS
DATE: 05/05/2023	REVISION: 90%
SCALE: N/A	JOB NUMBER: 061717

DOCUMENT 00300

BID FORM

NOTE TO BIDDER: Please use BLACK ink for completing this Bid form.

To. _____

Address: _____

Project Title: **CONGO RD./SHENANDOAH RD. ROUNDABOUT (BENTON) (S),
F.A.P. STPU-9035(26), ARDOT JOB NO. 061717**

Engineer's
Project No.: **21-5829**

Date: _____

Bidder: _____

Address: _____

Bidder's person to contact for additional information on this Bid:

Name: _____

Telephone: _____

ADDENDA

The Bidder hereby acknowledges that he/she has received Addenda Numbers:

_____ to these Specifications.
(Bidder insert number of each addendum received.)

INSURANCE AND BONDING REQUIREMENTS

The Bidder hereby acknowledges that he/she has read and understands the performance bond, payment bond, and insurance requirements for this project as specified in the General Conditions. If awarded a construction contract, the Bidder agrees to furnish the required bonds and insurance certificates within fifteen (15) days of the date the award is made.

Signature _____ Title _____

MEASUREMENT AND PAYMENT

The Bidder hereby acknowledges that he/she has read and understands Section 01025 - Measurement and Payment completely prior to completing this Bid Form.

Signature _____ Title _____

BIDDER'S DECLARATION AND UNDERSTANDING

The undersigned, hereinafter called the Bidder, declares that the only persons or parties interested in this Bid are those named herein, that this Bid is, in all respects, fair and without fraud, that it is made without collusion with any official of the Owner, and that the Bid is made without any connection or collusion with any person submitting another Bid on this Contract.

The Bidder further declares that he has carefully examined the Contract Documents for the construction of the project, that he has personally inspected the site, that he has satisfied himself as to the quantities involved, including materials and equipment, and conditions of work involved, including the fact that the description of the quantities of work and materials, as included herein, is brief and is intended only to indicate the general nature of the work and to identify the said quantities with the detailed requirements of the Contract Documents, and that this Bid is made according to the provisions and under the terms of the Contract Documents, which Documents are hereby made a part of this Bid.

The Bidder further agrees that he has exercised his own judgment and has utilized all data which he believes pertinent from the Engineer, Owner, and other sources in arriving at his own conclusions.

The Bidder states that he has experience in and is qualified to perform the work herein specified and, if he does not have craftsmen experienced and qualified in any phase of the work for which this Bid is offered, that he will subcontract the work under said phase to a contractor who does have the necessary experience and qualifications.

CONTRACT EXECUTION AND BONDS

The Bidder agrees that if this Bid is accepted, he will, within 15 days after notice of award, sign the Contract in the form annexed hereto, and will at that time, deliver to the Owner the Performance Bond and Payment Bond required herein, and will, to the extent of his Bid, furnish all machinery, tools, apparatus, and other means of construction and do the work and furnish all the materials necessary to complete all work as specified or indicated in the Contract Documents.

CERTIFICATES OF INSURANCE, PAYMENT BOND, AND PERFORMANCE BOND

The Bidder further agrees to furnish the Owner, before executing the Contract, the certificates of insurance, Payment Bond, and Performance Bond as specified in these Documents.

START OF CONSTRUCTION, CONTRACT COMPLETION TIME, AND LIQUIDATED DAMAGES

Start of Construction, Contract Completion Time, and Liquidated Damages are stated in Document 00500 - Contract.

SALES AND USE TAXES

The Bidder agrees that all federal, state, and local sales and use taxes are included in the stated bid prices for the work.

UNIT PRICE BASE BID

Any Bid may be rejected which contains material omissions, or irregularities, or in which any of the unit prices are obviously unbalanced in the opinion of the Owner. Also, a bid may be rejected if, in any manner it shall fail to conform to the conditions of the published Bidding Requirements and Contract Documents.

The bidder agrees to accept as full payment for the work proposed herein the amount computed under the provisions of the Contract Documents and based on the following unit price amounts, it being expressly understood that the unit prices are independent of the exact quantities involved. The bidder agrees that the unit prices represent a true measure of the labor and materials required to perform the work, including all allowances for overhead and profit for each type and unit of work called for in the Contract Documents.

Item	ARDOT Item No.	Description	Unit	Quantity	Unit Price	Total Price
1	201	Clearing	Station	3	\$	\$
2	201	Grubbing	Station	3	\$	\$
3	202	Removal and Disposal of Curb and Gutter	LF	344	\$	\$
4	202	Removal and Disposal of Concrete Driveways	SY	70	\$	\$
5	202	Removal and Disposal of Drop Inlets	EA	1	\$	\$
6	202	Removal and Disposal of Pipe Culverts	EA	2	\$	\$
7	SP, SS, & 303	Aggregate Base Course (Class 7)	TON	663	\$	\$
8	SP, SS, & 308	Aggregate in Cement Stabilized Crushed Stone Base Course	TON	17	\$	\$
9	SS & 308	Cement in Cement Stabilized Crushed Stone Base Course	TON	1	\$	\$
10	SS & 308	Processing Cement Stabilized Crushed Stone Base Course	SY	51	\$	\$
11	SP, SS, & 309	Portland Cement Concrete Base (5" Uniform Thickness)	SY	20	\$	\$
12	SS & 401	Tack Coat	GAL.	186	\$	\$
13	SP, SS, & 406	Mineral Aggregate in ACHM Binder Course (1")	TON	207	\$	\$
14	SP, SS, & 406	Asphalt Binder (PG 64-22) in ACHM Binder Course (1")	TON	12	\$	\$
15	SP, SS, & 407	Mineral Aggregate in ACHM Surface Course (1/2")	TON	508	\$	\$
16	SP, SS, & 407	Asphalt Binder (PG 64-22) in ACHM Surface Course (1/2")	TON	27	\$	\$
17	SP & 412	Cold Milling Asphalt Pavement	SY	1399	\$	\$
18	SP, SS, & 505	Portland Cement Concrete Driveway	SY	69.33	\$	\$
19	601	Mobilization	LS	1	\$	\$
20	603	Maintenance of Traffic	LS	1	\$	\$
21	SS & 604	Signs	SF	374	\$	\$
22	SS & 604	Barricades	LF	40	\$	\$

Item	ARDOT Item No.	Description	Unit	Quantity	Unit Price	Total Price
23	SS & 604	Traffic Drums	EA	65	\$	\$
24	SS & 604	Furnishing and Installing Precast Concrete Barrier	LF	520	\$	\$
25	604	Construction Pavement Markings	LF	4909	\$	\$
26	604	Construction Pavement Markings (Words)	EA	3	\$	\$
27	604	Removal of Construction Pavement Markings	LF	1681	\$	\$
28	SS & 606	18" Reinforced Concrete Pipe Culverts (Class III)	LF	557	\$	\$
29	SS & 606	18" Smooth Lined Polymer Precoated Metallic Coated Corrugated Steel Pipe	LF	557	\$	\$
30	SS & 606	24" Reinforced Concrete Pipe Culverts (Class III)	LF	67	\$	\$
31	SS & 606	24" Smooth Lined Polymer Precoated Metallic Coated Corrugated Steel Pipe	LF	67	\$	\$
32	SS & 606	36" Reinforced Concrete Pipe Culverts (Class III)	LF	237	\$	\$
33	SS & 606	36" Smooth Lined Polymer Precoated Metallic Coated Corrugated Steel Pipe	LF	237	\$	\$
34	SS & 606	18" Flared End Sections for Reinforced Concrete Pipe Culverts	EA	1	\$	\$
35	SS & 609	Drop Inlets (Type MO)	EA	12	\$	\$
36	SS & 609	Junction Boxes (Type E)	EA	2	\$	\$
37	SS & 609	Drop Inlet Extensions (4')	EA	11	\$	\$
38	SS & 609	Drop Inlet Extensions (8')	EA	4	\$	\$
39	620	Lime	TON	1	\$	\$
40	620	Seeding	ACRE	0.31	\$	\$
41	SS & 620	Mulch Cover	ACRE	0.31	\$	\$
42	620	Water	M. GAL	48.2	\$	\$
43	621	Silt Fence	LF	575	\$	\$
44	621	Sediment Removal and Disposal	CY	28	\$	\$
45	621	Rock Ditch Checks	CY	19	\$	\$
46	SS & 621	Filter Sock (12")	LF	476	\$	\$

Item	ARDOT Item No.	Description	Unit	Quantity	Unit Price	Total Price
47	623	Second Seeding Application	ACRE	0.31	\$	\$
48	624	Solid Sodding	SY	1320	\$	\$
49	SP, SS, & 632	Concrete Island	SY	327	\$	\$
50	SS & 633	Concrete Walks	SY	361	\$	\$
51	SP, SS, & 633	Concrete Walks (Type Special)	SY	18	\$	\$
52	SS & 634	Concrete Curb (Type A)	LF	264	\$	\$
53	SS & 634	Concrete Combination Curb and Gutter (Type A) (1' 6")	LF	1171	\$	\$
54	SS & 634	Concrete Combination Curb and Gutter (Type E-1) (2' 0")	LF	320	\$	\$
55	635	Roadway Construction Control	LS	1	\$	\$
56	637	Mailboxes	EA	1	\$	\$
57	637	Mailbox Supports (Single)	EA	1	\$	\$
58	SP, SS, & 641	Wheelchair Ramps (Type 3)	SY	64	\$	\$
59	718	Reflectorized Paint Pavement Marking White (12")	LF	111	\$	\$
60	718	Reflectorized Paint Pavement Marking Yellow (12")	LF	431	\$	\$
61	719	Thermoplastic Pavement Marking White (6")	LF	55	\$	\$
62	719	Thermoplastic Pavement Marking White (8")	LF	184	\$	\$
63	719	Thermoplastic Pavement Marking White (12")	LF	240	\$	\$
64	719	Thermoplastic Pavement Marking Yellow (6")	LF	1661	\$	\$
65	719	Thermoplastic Pavement Marking Yellow (8")	LF	358	\$	\$
66	719	Thermoplastic Pavement Marking (Yield Line)	LF	42	\$	\$
67	719	Thermoplastic Pavement Marking (Words)	EA	3	\$	\$
68	726	Standard Sign	SF	174	\$	\$
69	SS & 731	Temporary Impact Attenuation Barrier	EA	2	\$	\$
70	SP	Architectural Finish	SF	83	\$	\$
71	SP	Textured Coating Finish	SY	9	\$	\$

Item	ARDOT Item No.	Description	Unit	Quantity	Unit Price	Total Price
72	SP	Gravity Block Wall	SF	4554	\$	\$
73	SP	Pedestrian Guard	LF	458	\$	\$
74		Utility Line Route Preparation Including Clearing & Grubbing for Water Line Construction, Complete.	LF	519	\$	\$
75		Open-Cut Connection to Existing 14" Water Line, Complete.	EA	1	\$	\$
76		Open-Cut Connection to Existing 2" Force Main, Complete.	EA	2	\$	\$
77		Swing Connection to Existing 6" Water Line, Complete.	EA	2	\$	\$
78		Cut & Cap Existing Line after New Line is Installed, Complete.			\$	\$
		a) 6"	EA	2	\$	\$
		b) 12"	EA	1	\$	\$
		c) 14"	EA	1	\$	\$
79		Installation of 2" SDR 21 PVC Force Main, Including Trenching, Backfill, Fittings, etc., Complete.	LF	157	\$	\$
80		Installation of 14" CL 250 Ductile Iron Pipe, Including Trenching, Backfill, Fittings, etc., Complete.	LF	461	\$	\$
81		Installation of 12" CL 350 Ductile Iron Pipe, Including Trenching, Complete.	LF	58	\$	\$
82		Installation of 4" SDR 21 PVC Encasement Over Existing 2" Force Main, Complete.	LF	40	\$	\$
83		Installation of Concrete Anchor Collar on Existing 14" Water Line, Complete.	EA	1	\$	\$
84		Installation of Tapping Sleeve & Gate Valve, Complete.			\$	\$
		a) 12" x 6"	EA	1	\$	\$
		b) 12" x 12"	EA	1	\$	\$

Item	ARDOT Item No.	Description	Unit	Quantity	Unit Price	Total Price
		c) 14" x 12"	EA	1	\$	\$
		d) 14" x 14"	EA	1	\$	\$
85		Abandon Existing Water Valve in Place.	EA	1	\$	\$
86		Post Installation Water and Force Main Testing, Complete.	LF	676	\$	\$
87		Compacted Full-Depth ABC Class 7 Trench Backfill, Complete.	LF	70	\$	\$
88		Repair of Asphalt Pavement for Water Line Construction, Excluding ABC Class 7 Backfill, Complete.	LF	70	\$	\$
89		Arkansas Code Ann. §22-9-212, Trench and Excavation Safety System.	LS	1	\$	\$
90		Miscellaneous (Mobilization, Demobilization, As-Built Record Drawings)	LS	1	\$	\$
91		Roadway Lighting System	LS	1	\$	\$

TOTAL AMOUNT BID \$ _____

Words

BASIS OF AWARD

The Bidder understands that the Contract will be awarded to the most qualified bidder with the lowest Total Base Bid that the Owner may choose that makes the Project cost acceptable to the Owner. The Owner reserves the right to waive irregularities, reject bids, choose the most qualified bidder for the Project, and to postpone award of the Contract for a period of time which shall not exceed beyond 90 days from the bid opening date.

PAYMENT SCHEDULE

A detailed payment schedule for each structure or unit shall be submitted by the successful low Bidder. The successful low Bidder shall meet with the Engineer and Owner, to review the format and details of the payment schedule. This meeting shall be held within 5 days of notification that the Contractor is the low Bidder. The purpose of the meeting shall be to establish an acceptable format for the payment schedule. The construction detailed payment schedule shall be completed by the Contractor 14 days after the meeting and submitted to the Engineer and Owner for review and approval. Failure of the Contractor to submit the payment schedule as required may result in the Owner's rejection of the Bid or delay in processing the Contractor's request for a progress payment.

SUBCONTRACTORS

The Bidder further certifies that proposals from the following subcontractors were used in the preparation of this Bid; and if awarded a contract, Bidder agrees to not enter into Contracts with others for these divisions of the Work without written approval from the Owner and Engineer.

Subcontractor	Subcontractor
Street Address, City, State, Zip Code	Street Address, City, State, Zip Code
Subcontractor	Subcontractor
Street Address, City, State, Zip Code	Street Address, City, State, Zip Code

EXPERIENCE OF BIDDER

The Bidder states that he is an experienced Contractor and has completed similar projects within the last 5 years. (List similar projects, with types, names of clients, construction costs, and references with telephone numbers. Use additional sheets if necessary.)

SURETY

If the Bidder is awarded a construction Contract on this Bid, the Surety who provides the Performance and Payment Bond will be:

_____ whose address is:

Street, City, State Zip Code

BIDDER

The name of the Bidder submitting this Bid is:

_____ doing business at:

Street, City, State, Zip Code

which is the address to which all communications concerned with this Bid and with the Contract shall be sent.

The names of the principal officers of the corporation submitting this Bid, or of the partnership, or of all persons interested in this Bid as principals are as follows:

If Sole Proprietor or Partnership

IN WITNESS hereto the undersigned has set his (its) hand this ____ day of _____, 20__.

Signature of Bidder

Title

If Corporation

IN WITNESS WHEREOF the undersigned corporation has caused this instrument to be executed and its seal affixed by its duly authorized officers this ____ day of _____, 20__.

(SEAL)

Name of Corporation

By _____

Title _____

Attest _____

Secretary

~~TT. Item No. 29 — 18" Smooth Lined Polymer Precoated Metallic Coated Corrugated Steel Pipe~~

- ~~1. Unit of measure: Linear Foot~~
- ~~2. This item shall compensate the Contractor for materials, labor, tools, and equipment for installation of 18" smooth lined polymer precoated metallic coated corrugated steel pipe per the Drawings and Specifications.~~
- ~~3. The work shall be done per ARDOT Standard Specifications for Roadway Construction (Item No. 606) (2014 Edition).~~

UU. Item No. 30 – 24" Reinforced Concrete Pipe Culverts (Class III)

1. Unit of measure: Linear Foot
2. This item shall compensate the Contractor for materials, labor, tools, and equipment for installation of 24" reinforced concrete pipe culverts per the Drawings and Specifications.
3. The work shall be done per ARDOT Standard Specifications for Roadway Construction (Item No. 606) (2014 Edition).

~~VV. Item No. 31 — 24" Smooth Lined Polymer Precoated Metallic Coated Corrugated Steel Pipe~~

- ~~1. Unit of measure: Linear Foot~~
- ~~2. This item shall compensate the Contractor for materials, labor, tools, and equipment for installation of 24" smooth lined polymer precoated metallic coated corrugated steel pipe per the Drawings and Specifications.~~
- ~~3. The work shall be done per ARDOT Standard Specifications for Roadway Construction (Item No. 606) (2014 Edition).~~

WW. Item No. 32 – 36" Reinforced Concrete Pipe Culverts (Class III)

1. Unit of measure: Linear Foot
2. This item shall compensate the Contractor for materials, labor, tools, and equipment for installation of 36" reinforced concrete pipe culverts per the Drawings and Specifications.
3. The work shall be done per ARDOT Standard Specifications for Roadway Construction (Item No. 606) (2014 Edition).

~~XX. Item No. 33 — 36" Smooth Lined Polymer Precoated Metallic Coated Corrugated Steel Pipe~~

- ~~1. Unit of measure: Linear Foot~~
- ~~2. This item shall compensate the Contractor for materials, labor, tools, and equipment for installation of 36" smooth lined polymer precoated metallic coated corrugated steel pipe per the Drawings and Specifications.~~
- ~~3. The work shall be done per ARDOT Standard Specifications for Roadway Construction (Item No. 606) (2014 Edition).~~

ARKANSAS DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

JOB NO. 061717

TEXTURED COATING FINISH (CAST-IN PLACE RETAINING WALLS)

Subsection 802.19 Finishing Concrete Surfaces of the Standard Specifications, Edition of 2014, is modified as follows:

(a) General. After the third paragraph, add:

The Contractor shall use a Class 3, Textured Coating Finish (Smooth Texture) on the exposed surfaces of retaining walls and Concrete Walk (Type Special) as designated in the Plans. All surfaces shall be cleaned as necessary for bonding of the finish. Class 1 or Class 2 Protective Surface Treatment shall not be used on surfaces where textured coating finish is specified.

(b) (3) Class 3, Textured Coating Finish. Delete the second paragraph and replace with:

The Contractor shall furnish a small quantity of the materials for textured coating finish in the specified colors for use on a designated test area. Color adjustment may be required as directed by the Engineer and may require application to additional test areas. The final colors used on the project shall be as approved by the Engineer. The color of the textured coating finish from Federal Color Standard 595 B applied to all exposed surfaces shall be as follows:

Brown, equal or close to Shade 30277.

Textured coating finish of exposed surfaces of retaining walls shall be applied after the final ground line of the cut or embankment has been established.

Method of Measurement. Textured Coating Finish applied at the direction of the Engineer will be measured by the square yard. Measurement will be made of the actual area covered as directed. The quantities shown on the plans for Textured Coating Finish will be considered as the final quantities and no further measurement will be made unless, in the opinion of the Engineer or upon evidence furnished by the Contractor, substantial variations exist between quantities shown on the plans and actual quantities due to changes in alignment or dimensions or to apparent errors.

Basis of Payment. Work completed and accepted and measured as provided above will be paid for at the contract unit price bid per square yard for Textured Coating Finish, which price shall be full compensation for furnishing materials; for cleaning surfaces and application; and for all labor, equipment, tools, and incidentals necessary to complete the work.

Payment will be made under:

Pay Item	Pay Unit
Textured Coating Finish	Square Yard

ARKANSAS DEPARTMENT OF TRANSPORTATION
SPECIAL PROVISION
JOB NO. 061717
ARCHITECTURAL FINISH (CAST-IN PLACE RETAINING WALLS)

DESCRIPTION. This item shall consist of providing a pattern finish to concrete surfaces in accordance with these specifications and in conformity with the locations, dimensions, and lines shown on the plans.

GENERAL. The pattern shall be Ashlar Stone or approved equal. Prior to construction, the Contractor shall submit a work plan to the Engineer for approval showing materials, construction methods, and other features affecting the pattern construction. The work performed shall be according to the approved work plan.

(a) **Ashlar Stone Finish.** The Ashlar Stone pattern shall have ridges as shown in the plans and shall be approximately 1 5/8" deep. ***An additional 1 1/2" of concrete will be required on the exposed face of the wall with a maximum form liner depth of 2" to provide a minimum clearance of 1 1/2" cover to reinforcing steel.*** Before construction of the retaining wall or Concrete Walk (Type Special), approval of the Ashlar Stone Architectural Finish will be required. Approval will be based on a sample panel with approximate dimensions of 6 feet by 6 feet. In lieu of a sample panel, the Engineer may accept proof of previous work performed with similar size panels and finish. The retaining wall and Concrete Walk (Type Special) shall be constructed according to the approved plan.

METHOD OF MEASUREMENT. Architectural Finish will be measured by the square foot. The quantities shown on the plans for Architectural Finish will be considered as the final quantities and no further measurement will be made unless, in the opinion of the Engineer or upon evidence furnished by the Contractor, substantial variations exist between quantities shown on the plans and actual quantities due to changes in alignment or dimensions or to apparent errors.

BASIS OF PAYMENT. Work completed and accepted and measured as provided above will be paid for at the contract unit price bid per square foot for Architectural Finish, which price shall be full compensation for furnishing materials; form liners; forms; and for all labor, equipment, tools, and incidentals necessary to complete the work.

Payment will be made under:

PAY ITEM	PAY UNIT
Architectural Finish	Square Foot